

Timbmet Door Products Guide



About Timbmet

Founded in 1942, Timbmet is a major UK importer, distributor and supplier of Timber and Panel products. We are an environmentally conscientious organisation, recognised around the world.

Throughout our years of operation, we've established excellent networks within the Timber industry worldwide, allowing us to continually research and source new species, products and ranges ensuring you have the best quality lines to choose from. All of our products are sourced responsibly.

The Timbmet team has accumulated decades of experience and expertise, making us ideally placed to act as your trusted advisor. We can offer you versatile and cost effective solutions to help meet your needs. If you have any queries we can help you by advising on the species or products to use.

Still a family business, the founder's enduring passion for wood inspires the ethos of the company today.

Timbmet... Everything wood should be



Door Products

Timbmet stock a huge range of interior and exterior doors and doorblanks with various levels of fire, acoustic and thermal performance suitable for a wide range of applications. We also supply door size laminates, door frames and lippings, skirting and architrave and mouldings.

Our high quality branded products are supplied by Sentry, Halspan, Blankfort, Galtee, Flamebreak, Egger, Greenlam and OH Industri. All fire rated products within our range are tested to BS 476 Part 22 and the majority of products are also BM TRADA Q-Mark Approved.

We provide a full range of manufacturing services, including bespoke profiles for door frames, cross cutting to length, trenching, priming and lacquering to your exact requirements.

The Timbmet team are on hand to offer versatile and cost effective solutions to all your door making needs. We are your ideal partners for the highest quality doors and door products at the right prices.

Doorblanks

Veneered Chipboard – Interior Use	4
Halspan FSC® certified Solid Chipboard – Interior Use	5
Blankfort FSC® certified – Interior and Exterior Use	6
Timber Core – Interior and Exterior Use	8
Timber Composite – Exterior Use	9

Fully Finished Doors

Viscount	10
Door Size Laminates	
Egger ZOOM - Woodgrain decors	12
Egger ZOOM - Unicolour decors	15
Greenlam - Woodgrains	18
Greenlam - Solid colours	19

Sawn Timber

Engineered Timber (TEC®)	21
Profiles and Mouldings	22
	25

Manufacturing and Finishing

Cut and Edge Service	28
Responsible Business	29
UK Coverage	30
	31

Veneered Chipboard Doorblanks

Our veneered faced Chipboard doorblanks are available in various veneer species and are supplied unliped and unlacquered.

These doorblanks are FD30 or FD60 fire rated and are for interior use.

Description	Fire Rating	Product Code	Thickness	2135 x 915mm	2440 x 1220mm
Ash Crown Cut 2 sides	FD30	ASHHALFD30	45mm	✓	✓
Sapele Quarter Cut 2 sides	FD30	SAPHALFD30	45mm	✓	
Black Walnut Crown Cut 2 sides	FD30	WALHALFD30	45mm	✓	✓
American White Oak Crown Cut 2 sides	FD30	WOHALFD30	45mm	✓	✓
Steamed Beech Crown Cut 2 sides	FD30	BESHALFD30	45mm	✓	
Ash Crown Cut 2 sides	FD60	ASHHALFD60	54mm	✓	
American White Oak Crown Cut 2 sides	FD60	WOHALFD60	54mm	✓	



FD30 and FD60 fire rated

Halspan Doorblanks

Timbmet sell a range of FSC® certified, fire rated solid Chipboard doorblanks from Halspan, for interior use.

The Halspan range of solid Chipboard doorblanks are all approved within the BM TRADA Q-Mark Third Party certification scheme.

All products have FSC® Chain of Custody Certification (FSC 85% Mixed Sources)



Halspan FD30 & FD60

- FD30 and FD60 when tested to BS476 Part 22
- 'Severe' duty rated to DD171 (suitable for areas of high frequency use)
- Up to 36dB Rw sound reduction

Description	Thickness (mm)	Product Code	2060 x 840mm	2135 x 915mm	2440 x 915mm	2440 x 1220mm	2800 x 915mm	2800 x 1830mm	3050 x 1050mm
FD30 Prima	44	HALFD30FSC	✓	✓	✓	✓	✓	✓	✓
FD30 Optima	44	HALFD300PFSC	✓	✓	✓	✓	✓	✓	✓
FD60 Prima	54	HALFD60FSC	✓	✓	✓	✓	✓	✓	✓
FD60 Optima	54	HALFD600PFSC	✓	✓	✓	✓	✓	✓	✓
Non-fire rated Prima	38	HALNFR38FSC		✓					

Halspan FD90 & FD120

Component sets are also available, comprising of a Halspan 64mm doorblank, an intumescent set and an essential ironmongery pack to enable fabricators to produce FD90 and FD120 door sets.

Ironmongery finishes include:

- Brushed stainless steel
- Simulated brushed stainless steel (FD90 only)
- Bright zinc plated (FD90 only)



Blankfort Doorblanks

High performance, FSC® certified doorblanks from the Blankfort range are available in MDF, Chipboard and Birch Plywood faces. Blankfort products are FSC® Chain of Custody Certified as standard and approved within BM TRADA Q-Mark Third Party Certification Scheme.



Blankfort FSC® Internal Doorblanks

These are precision manufactured doorblanks, made from selected and finger jointed Pine or Spruce.

- FD30 and FD60 fire rated when tested to BS476 Part 22
- 'Severe Duty' rated to DD171 (suitable for areas of high frequency use)
- Acoustic performance data is also available
- Blankfort 'Plus' products have a 9mm chipboard sub-face and 3mm MDF outer facing
- FD60 doorblanks have superior acoustic quality and are 54mm thick, FD30 doorblanks are 45mm thick



FD30 Doors	Fire Rating	Product Code	2060 x 840mm	2135 x 920mm	2440 x 920mm	2440 x 1220mm	2440 x 1397mm	2750 x 920mm	3050 x 920mm	3050 x 1220mm
Blankfort 9mm MDF faced	FD30	BLAFD30MFSC	✓	✓	✓	✓	✓	✓	✓	✓
Blankfort 'Plus' 3mm MDF faced	FD30	BLAFD30+MFSC	✓	✓	✓	✓	✓	✓	✓	✓
	FD60	BLAFD60+MFSC	✓	✓	✓	✓	✓	✓	✓	✓
Blankfort 9mm Chipboard faced	FD30	BLAFD30CFSC	✓	✓	✓	✓	✓	✓	✓	✓
	FD60	BLAFD60CFSC	✓	✓	✓	✓	✓	✓	✓	✓



Blankfort Security Doorblanks

Blankfort Security is a high performance, laminated, timber-cored plywood-faced doorblank, specifically designed to provide resistance to high body impact (e.g. sledgehammers).

- Perfectly suited for use in environments where there is likely to be regular abuse, reduced care and frequent passage
- Can be cut down or modified to accommodate glazing apertures without invalidating its FD30 fire test rating

Description	Fire Rating	Product Code	2135 x 920mm
Blankfort Security 3 Ply	FD30	BLASECFSC	✓

Blankfort X

Pine core with 4.5mm Birch exterior plywood faces (overall thickness 45mm), these doorblanks are FD30 fire rated.

- Blankfort X is Q-Mark certified
- FSC® 70% Mix

Description	Fire Rating	Product Code	2135 x 920mm	2440 x 920mm	2750 x 920mm
Blankfort X	FD30	BLAFD300LP	✓	✓	✓

Blankfort FD90

64mm Blankfort FD90 doorblank is a completely fabricated, ready to use doorblank and comprises a high density MDF face, a high density particleboard subface and solid finger jointed and laminated wood lamels each side of a high density non-combustible core.

- Fully size adjustable
- FSC® and Q-Mark certified
- Available from stock in 3 sizes

Description	Fire Rating	Product Code	2135 x 920mm	2135 x 1210mm	2430 x 920mm
Blankfort FD90	FD90	BLAFD90+MFSC	✓	✓	✓

Timber Core Doorblanks



Fire rated timber core doorblanks are available from Sentry and Flamebreak, with FSC® certified and lightweight options available. Our FD30 and FD60 certified doorblanks have been tested to BS 476 Part 22. BM TRADA Q-Mark approved.

Sentry Paint Grade Timber Core Doorblanks

Sentry ProTech is a range of timber core doorblanks, made with a softwood tri-laminated core, with a plywood or MDF face. Available as FD30 or FD60 tested, and pre- or unlipped. FD30 doorblanks are 44mm thick, FD60 are 54mm. MDF pre-lipped doorblanks are also available from stock.

Unlipped Doorblanks (FSC® certified)

Description	Fire Rating	Product Code	2135 x 915mm	2440 x 1200mm
4mm plywood faced	FD30	SENF30PT (FSC®)	✓	✓
4mm MDF faced	FD30	SENF30MDF (PTFS)	✓	✓
9mm plywood faced	FD60	SENF60PT (FSC®)	✓	✓
9mm MDF faced	FD60	SENF60MDF (PTFS)	✓	✓



Pre-lipped Doorblanks Plywood Faced

Fire Rating	Product Code	1981 x 686mm	1981 x 762mm	1981 x 838mm	2040 x 726mm	2040 x 826mm	2040 x 926mm
FD30	SENF30PTL	✓	✓	✓	✓	✓	✓
FD60	SENF60PTL			✓		✓	✓

Flamebreak Lightweight Timber Core Doorblanks

Flamebreak is a range of timber doorblanks, suitable for interior and exterior use, constructed with a lightweight hardwood tri-laminate core.

- Acoustic and thermal performance test data is available
- FD30 doorblanks are 45mm thick, FD60 are 54mm thick



Description	Fire Rating	Product Code	2135 x 915mm	2440 x 1220mm	2745 x 915mm	2820 x 1220mm	3050 x 1220mm
4mm Hardwood ply faced	FD30	FLAFD30P4	✓	✓	✓	✓	✓
6mm MDF faced	FD30	FLAFD30M6	✓	✓			
6mm Hardwood ply faced	FD60	FLAFD60P6	✓	✓			
6mm MDF faced	FD60	FLAFD60M6	✓	✓			

Timber Composite Doorblanks



Timber composite doorblanks from OH Industri and Timbmet are manufactured in Denmark by OH Industri at their state-of-the-art manufacturing facility. The construction of the Timbmet/OH composite door range means that they achieve existing Part-L regulations for thermal efficiency of exterior doors, and established security test standards.

Timbmet/OH composite door range

The Timbmet/OH composite door range has been tested to the security standards of PAS 23 & 24 and is registered within the BM TRADA Q-Mark "Enhanced Security Doorsets PAS 23 & 24" door scheme.

These doorblanks come with a 10-Year Manufacturer's Guarantee (conditions apply).

Stock Items

The following doorblanks with stiles and rails are available in a Paint/Stain finish with Chen Chen veneer faces.

Product Code	Security Door	Stiles	Rails	Standard Size	Weight	U-Value*
COMP44P	44mm	150mm	240mm	935x2150 (can trim to 735x1770)	13kg/m ³	1.3kg/m ²
COMP54P	54mm	110mm	110mm	935x2070 (can trim to 815x1950)	14kg/m ³	1.1kg/m ²

*U-Values are calculated, not measured, based on a doorblank with no cut outs.

Special Order Options

We can order the following options

Sizes	Any special size up to 1200mm x 2400mm can be manufactured
Facing species	Oak, Sapele, Pine and laminate options
Thickness	60mm, 68mm and 80mm
Servicing	Cut outs for hinges, locks, vision panels, letterplates and spyholes
Surface finishing	Factory finish to any RAL colour



Viscount Doors

Timbmet supply the Viscount range of fully finished doors in 5 veneer finishes and 7 standard sizes. The doors are fully lacquered with a satin finish to both faces and edges using 2 coats of UV clear acrylic. The finish provides a smooth surface to the door allowing the natural beauty of the veneer to be seen. The 10mm lipping on the doors is in a complementary hardwood species.

- Available as non-fire (to order), FD30 and FD60 fire rated
- FD30 doors are 44mm thick, FD60 doors are 54mm
- The FD30 and FD60 doors are 'severe duty' rated to DD171 which means they are suitable in areas of high frequency use
- FD30 and FD60 fire doors have a solid chipboard core
- Vision panel servicing can be carried out 'to order', contact us for information on lead times

Acoustic Properties

FD30 and FD60 Viscount Doors meet and exceed the requirements of Building Regulations Approved Documents E. They are designed to meet demands for improved acoustic insulation and to combat the problems of noise pollution from neighbours.




Natural Veneers

The veneers used in the Viscount range are of standard commercial quality 'A' grade, long run and centre book matched. The veneers are made from natural materials therefore colour/grain variations should be expected. All Viscount veneered doors are generally supplied from stock and as such have been manufactured in high volume production runs and not against a specific order.

	Product Code	1981 x 686mm	1981 x 762mm	1981 x 838mm	2040 x 626mm	2040 x 726mm	2040 x 826mm	2040 x 926mm
Ash Crown Cut	VISASFD30FSC	0	0	✓	0	✓	✓	✓
	VISASFD60FSC			0			✓	✓
American White Oak Crown Cut	VISWOFD30FSC	✓	✓	✓	✓	✓	✓	✓
	VISWOFD60FSC						✓	✓
Maple Crown Cut	VISMPFD30FSC	0	0	0	0	0	0	0
	VISMPFD60FSC			0				0
Beech Steamed Crown Cut	VISBEFD30FSC	0	0	0	0	✓	✓	✓
	VISBEFD60FSC			0			0	0
American Walnut Crown Cut	VISWAFD30FSC	0	0			0	0	0
	VISWAFD60FSC			0			0	0

0 Available to order ✓ Available from stock

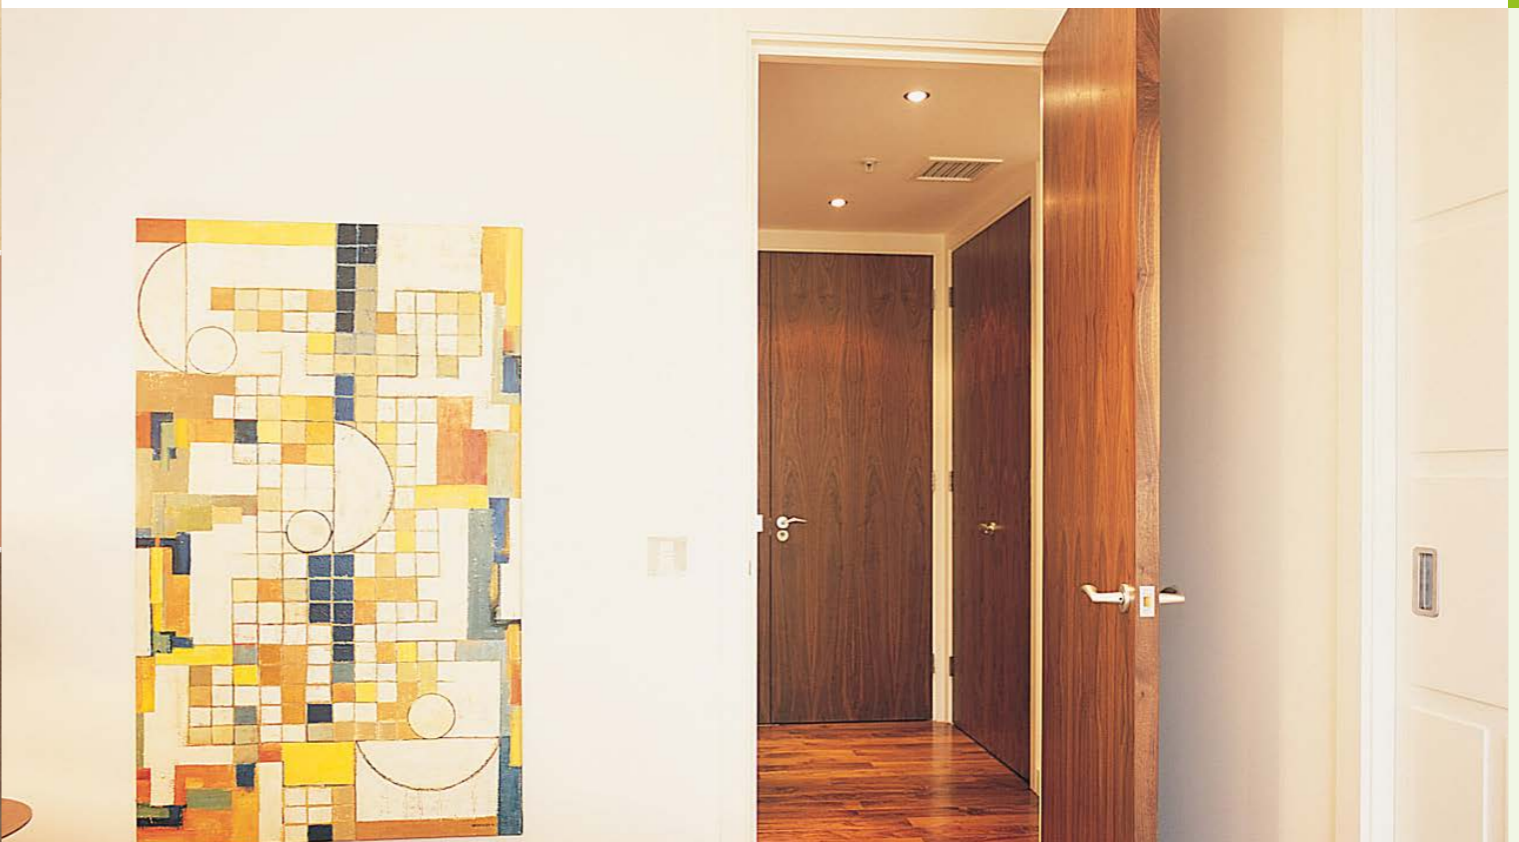

Door Size Laminates

Door Size Laminates in a range of Woodgrain and Unicolour decors are available from Egger and Greenlam. They are an extremely durable and cost effective solution to veneers.

Egger ZOOM Door Size Laminates – Woodgrain decors

Egger has extended its internal door size laminate collection, offering 45 woodgrain laminate decors in a range of textures.

- Fire Retardant grade available to order, minimum order quantity and lead times may apply
- Available in 2150mm x 950mm sheets



<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST79 Finepore Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>
<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST10 Authentic Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>

* Available to order, minimum order quantity and lead times may apply.

<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>
<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST22 Matex Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>
<p>Texture ST22 Matex Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST22 Matex Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST22 Matex Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST22 Matex Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST10 Authentic Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>

* Available to order, minimum order quantity and lead times may apply.

Egger ZOOM Door Size Laminates – Woodgrain decors
(continued)



<p>Tobacco Gladstone Oak H3325</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Grey Beige Gladstone Oak H3326</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Highline Oak H3344</p> <p>Texture ST36 Brushed Size (mm) 2150 x 950 x 0.8mm</p>	<p>Anthracite Highland Oak* H3363</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Natural Lancaster Oak H3368</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>
<p>Natural Light Oak* H3389</p> <p>Texture ST11 Natural Pore Size (mm) 2150 x 950 x 0.8mm</p>	<p>Thermo Pine H3420</p> <p>Texture ST36 Brushed Wood Size (mm) 2150 x 950 x 0.8mm</p>	<p>White Fleetwood H3450</p> <p>Texture ST36 Brushed Wood Size (mm) 2150 x 950 x 0.8mm</p>	<p>Champagne Fleetwood H3451</p> <p>Texture ST36 Brushed Wood Size (mm) 2150 x 950 x 0.8mm</p>	<p>Tobacco Pacific Walnut H3702</p> <p>Texture ST10 Authentic Size (mm) 2150 x 950 x 0.8mm</p>
<p>Tobacco Aida Walnut H3704</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Natural Dijon Walnut H3734</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>White Cape Elm H3760</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Dark Brown Cape Elm H3766</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Natural Mandal Maple H3840</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>

* Available to order, minimum order quantity and lead times may apply.

Egger ZOOM Door Size Laminates – Unicolour decors



Egger has extended its internal door size laminate collection, offering 45 Unicolour laminate decors in a range of textures.

- Fire Retardant grade available to order, minimum order quantity and lead times may apply
- Available in 2150mm x 950mm sheets

<p>Premium White W1000</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Alpine White W1100</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Mussel U100</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Platinum White W980</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Velvet Yellow* U107</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Cotton* U113</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Yellow U114</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Alabaster U104</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Sand Beige* U156</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Camel* U204</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Oyster* U216</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Sun Yellow* U129</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Crema U222</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>			

* Available to order, minimum order quantity and lead times may apply.

Egger ZOOM Door Size Laminates – Unicolour decors
(continued)

<p>Silk* U224</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Burgundy* U311</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Red U321</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Chilli Red* U323</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Aubergine* U330</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Orange* U332</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Fuchsia* U337</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Marine* U506</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Horizon* U522</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Blue U525</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Petrol* U532</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Apple Green* U625</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Green* U628</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Lime Green U630</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Grass Green* U632</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Turquoise* U633</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>

* Available to order, minimum order quantity and lead times may apply.

Egger ZOOM Door Size Laminates – Unicolour decors
(continued)



<p>Cashmere U702</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Light Grey U708</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Stone Grey U727</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Basalt U730</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>
<p>Dust Grey U732</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Taupe Grey* U750</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Pearl Grey* U763</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Silver Grey U765</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>White Grey* U775</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Brown Grey* U795</p> <p>Texture ST9 Perfect Matt Size (mm) 2150 x 950 x 0.8mm</p>	<p>Graphite U961</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Diamond Grey* U963</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>
<p>Black U999*</p> <p>Texture ST15 Office Size (mm) 2150 x 950 x 0.8mm</p>	<p>Quartz Lava* F447</p> <p>Texture ST2 Diamond Size (mm) 2150 x 950 x 0.8mm</p>	<p>Quartz Cubanit* F488</p> <p>Texture ST2 Diamond Size (mm) 2150 x 950 x 0.8mm</p>	<p>Aluminium F509</p> <p>Texture ST2 Diamond Size (mm) 2150 x 950 x 0.8mm</p>



* Available to order, minimum order quantity and lead times may apply.

Greenlam Door Size Laminates – Woodgrains

A range of woodgrain decor door size laminates from Greenlam are all available from stock. The high pressure laminate range comes with a suede texture; a hard exterior finish with a slight sheen.

- 14 woodgrains available
- Fire retardant grade available to order, minimum order quantity and lead times may apply
- Antibacterial protection
- FSC® certified
- Available in 2160mm x 940mm sheets



<p>Natural Pine 631</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Sunset Beech 633</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Bavarian Beech 695</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Latin Walnut 696</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Light Beech 701</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>
<p>Oak 738</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Fawned Rosewood 3032</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Spice Cherry 3204</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Lorraine Walnut 5004</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Thansau Maple 5006</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>
<p>Umber Oak 5050</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Primeval Oak 5076</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Esoteric Oak 5078</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Walnut Supreme 9623</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	

Greenlam Door Size Laminates – Solid colours

The Greenlam door size laminates range is all available from stock in a range of solid colour high pressure laminate decors.

- 28 solid colours available
- Suede texture (hard exterior with a very light sheen)
- Fire retardant grade available to order, minimum order quantity and lead times may apply
- Antibacterial protection
- FSC® Certified



<p>White 101</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Wool 107</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Absolute White 108</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Frosty White 113</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Ivory 121</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>
<p>Cyclone 132</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Beige 141</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Barbie Pink 173</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Chocolate 181</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Red 203</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>
<p>Red Dynasty 204</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Divine Yellow 207</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Light Orange 217</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Dark Grey 261</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Grey 262</p>  <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>

Greenlam Door Size Laminates – Solid colours
(continued)



<p>Ash Grey 266</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Dust 268</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Smog 269</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Light Grey 271</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Pine Nut 274</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>
<p>Pearl Grey 275</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Charcoal 277</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Blue 280</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Electric Blue 291</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Symphony 292</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>
<p>Black 401</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Fuchsia Pink 3545</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>	<p>Fresh Green 3580</p> <p>Texture Suede Size (mm) 2160 x 940 x 0.7mm</p>		


Sawn Timber

Timbmet offers one of the most comprehensive ranges of hardwoods and clear softwoods available in the UK, with over 40 species available both in sawn loose and packs. We can also source other species on request.

Many of our species are suitable for door frame sections including the most popular; Oak, Beech, Sapele, Meranti, Red Grandis, Redwood, Walnut, Cherry, Ash and Maple.

All of our products are responsibly sourced with many certified species available. Our sawn selected orders are hand picked by our skilled staff, turning and selecting to meet your requirements.

Timbmet can help you choose the most appropriate species for your project.

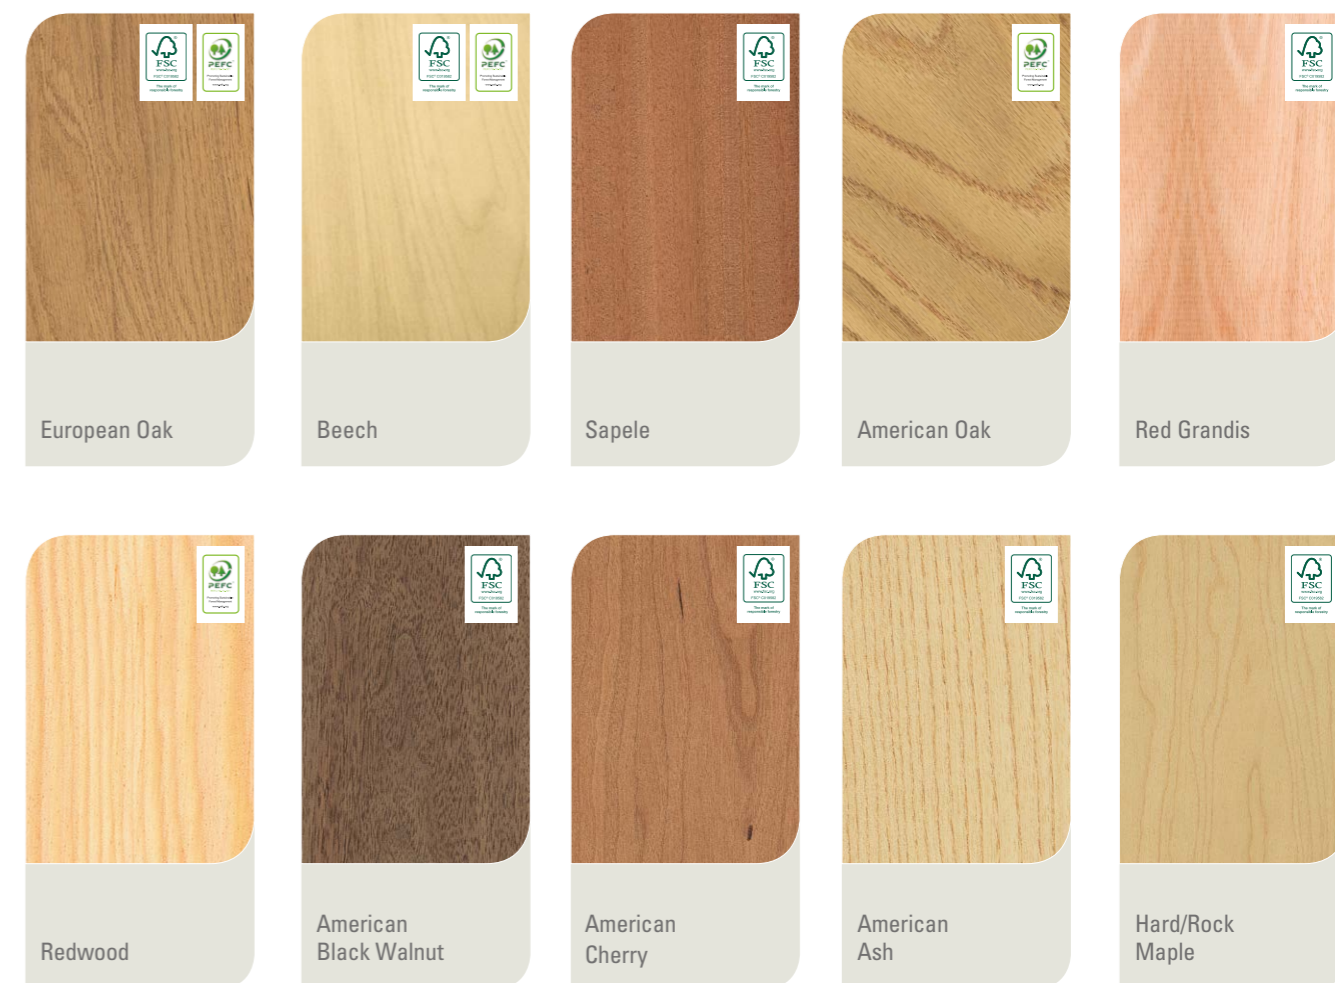

For more information on our timber species go to www.timbmet.com

Engineered Timber (TEC®)

Timbmet Engineered Components (TEC®) are highly engineered wood products designed to combine high performance and aesthetic appeal. The multi-layer construction offers stability and stress performance far in excess of traditional solid wood, and is FD30 fire certified. TEC® products are free from problems associated with natural characteristics. Each component is consistently graded and dried, giving a uniform performance and appearance.



TEC® Sandwich Panels

Thermally efficient, stable and durable, TEC® Sandwich Panels are ideal for use in internal and external doors. They are available in a range of species in full sheet sizes or made to measure. For use in doors or as panels, either as flush panels, or as raised and fielded panels (with or without groove profiles). They are a composite sandwich construction with an insulating core, designed to meet 'Part L' U-value regulations.

External Quality Veneered Sandwich Panels - 28mm Flat (Aluminium strip can be added to order)

Species	Thickness (mm)	U-value (W/m²K)	Core Material	Weight (kg/m²)	Sheet Size (mm)	Construction
FSC® Certified HDF*	28	1.26	Polystyrene	9.8	2100 x 1280	4.0mm outer layer
Sapele	28	1.34	Polystyrene	9.6	2440 x 1200	1.5mm sliced front veneer on 4.5mm cross banded plywood construction
Oak	28	1.34	Polystyrene	9.6	2440 x 1200	
ChenChen**	28	1.54	Polystyrene	6.4	2440 x 1200	
	24	1.33	Polystyrene	6.6	2440 x 1200	

Sandwich Panels- 45mm Flat

Solid Oak	45	1.28	Polystyrene	23.07	2300 x 1030	Timber 15 Plywood 3.5 Polystyrene 8 Plywood 3.5 Timber 15
Sapele	45	1.34	Polystyrene	23.07	2250 x 1030	

* Can be painted ** Can be painted or stained

Solid Timber TEC® Sandwich Panels

- 28mm Flat, 45mm Flat designed for Raised and Fielded
- All 45mm Solid Timber panels are FD30 fire tested
- Other core materials, special designs and thicknesses available to order



Solid Timber Sandwich Panels - 28mm Flat, 45mm Flat designed for Raised and Fielded

Species	Thickness (mm)	U-value* (W/m²K)	Core Material	Weight (kg/m³)	Construction and Sheet Size	
					28 (mm)	45 (mm)
Accoya	28	1.3	PUR Foam	7	Construction (mm) Accoya 6 Accoya 15 PUR foam 16 PUR foam 15 Accoya 6 Accoya 15	
	45	1.1	PUR Foam	16	Sheet Size (mm) 2100 x 800 1800 x 900 1800 x 800	
Solid Oak	28	2.2	HD Cork	13.00	Construction (mm)	
	45	1.3	Cork	20.24	External Timber 6 External Timber 14 Plywood 4 HD Cork 17 HD Cork 8 Plywood 4 External Timber 14 Plywood 4	
Pine Redwood PEFC	28	2.0	HD Cork	10.60	External Timber 6 External Timber 14 Plywood 4 HD Cork 17 HD Cork 8 Plywood 4 External Timber 14 Plywood 4	
	45	1.2	Cork	14.64	External Timber 6 External Timber 14 Plywood 4 HD Cork 17 HD Cork 8 Plywood 4 External Timber 14 Plywood 4	
Sapele	28	2.2	HD Cork	13.36	External Timber 6 External Timber 14 Plywood 4 HD Cork 17 HD Cork 8 Plywood 4 External Timber 14 Plywood 4	
	45	1.3	Cork	21.08	External Timber 6 External Timber 14 Plywood 4 HD Cork 17 HD Cork 8 Plywood 4 External Timber 14 Plywood 4	
FSC Red Grandis	28	2.2	HD Cork	11.80	Sheet Size (mm) 1800 x 800 1800 x 900 2100 x 800 1800 x 1200 1800 x 1200	
	45	1.5	HD Cork	19.15	1800 x 800 1800 x 900 2100 x 800 1800 x 1200 1800 x 1200	
Medex MDF	28	1.6	PUR Foam	12.90	Construction (mm) MDF 9 MDF 15 PUR Foam 10 PUR Foam 15 MDF 9 MDF 15	
	45	1.2	PUR Foam	21.45	Sheet Size (mm) 2440 x 1220 2440 x 1220	
Tricoya Medex	28	1.3	PUR Foam	9.2	Construction (mm) MDF 6 MDF 15 PUR Foam 16 PUR Foam 15 MDF 6 MDF 15	
	45	1.1	PUR Foam	22	Sheet Size (mm) 2440 x 1220 2440 x 1220	

*U-values are calculated, not measured. **NB: Must be stored, maintained and fitted in dry, moisture free conditions.**

TEC® Door Parts

Timbmet stock a range of FD30 fire certified TEC® door parts in some of our most popular timber species. FSC® or PEFC certified options are available.

TEC® Door Component

Description	Size	European Oak FSC® Certified	Sapele	Redwood FSC® or PEFC Certified	Red Grandis FSC® Certified
Varying lengths available	2nd figure is the face	Clear Faced	Clear Faced	Finger Jointed	Clear/Finger Jointed
Stile	72 x 95mm	✓	✓	✓	✓
Stile	72 x 120mm	✓	✓		
Stile	72 x 125mm			✓	✓
Rails	72 x 200mm	✓	✓		✓
Stile	63 x 95mm	✓	✓	✓	✓
Stile	63 x 105mm		✓		✓
Stile	63 x 115mm			✓	
Stile	63 x 120mm	✓	✓	✓*	
Stile	63 x 125mm			✓	✓
Stile	63 x 150mm				✓
Rails	63 x 200mm	✓	✓	✓	✓
Stile	48 x 120mm	✓	✓	✓	✓
Stile	48 x 125mm				✓
Rails	48 x 200mm	✓	✓	✓	✓

*Redwood 63 x 120mm is Clear Faced only.

TEC® Door Frame Sections

Description	Size	European Oak FSC® Certified	Sapele	Redwood FSC® or PEFC Certified	Red Grandis FSC® Certified
Varying lengths available	2nd figure is the face	Clear Faced	Clear Faced	Finger Jointed	Clear/Finger Jointed
Frame	96 x 63mm	✓		✓	✓
Frame	96 x 75mm	✓	✓	✓	✓
Frame	96 x 96mm	✓		✓	✓
Frame	105 x 50mm				✓
Frame	105x 63mm				✓
Frame	105 x 75mm				✓
Frame	126 x 63mm			✓	✓
Frame	126 x 75mm				✓
Frame	150 x 50mm			✓	✓




Profiles and Mouldings


Timbmet offer a vast selection of industry standard profiles in your choice of timber, in varying widths, thicknesses and species. We also have a range of Door Mouldings available from stock, in a number of timber species. A selection of the most popular door profiles are shown below.

We can manufacture to your chosen species, but standard species include:

- Red Grandis
- European Oak
- American White Oak
- Meranti
- Southern Yellow Pine
- Red Hardwood

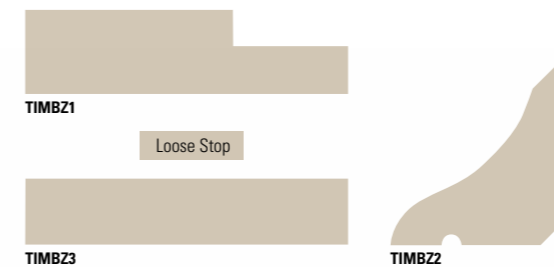

Bespoke profiles and mouldings to your specification are also available on request.

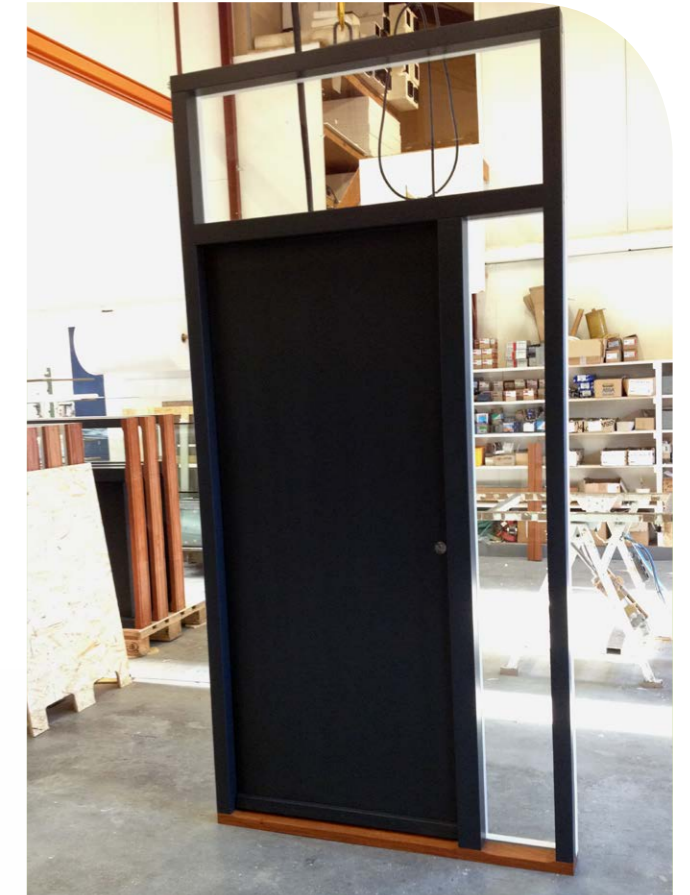


Door Frame Sections and Lippings

Timbmet can also offer a range of door frame sections and lippings in a number of timber species. Door frames sections are available in either softwood or hardwood and either with or without a sill.

Beading

Timbmet can offer industry standard beading or bespoke beading profiles.

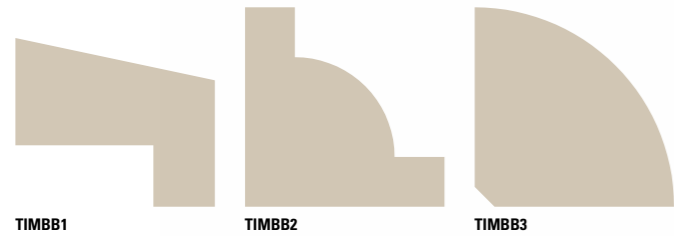

TIMBB1 TIMBB2 TIMBB3



TIMBB4 TIMBB5



Bespoke Profiles

If the species or profile you need is not shown please contact us as we can machine timber or TEC® to your requirements.

Skirting and Architrave

Timbmet also offer a range of Skirting and Architrave Mouldings from stock, in a number of species. Bespoke profiles and mouldings are also available on request.



TIMBS1



TIMBS6




TIMBS2



TIMBS7



TIMBS3

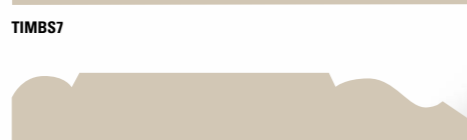

TIMBS8




Planed All Round (PAR) Mouldings

Our planed all round mouldings have a smooth finish to all flat surfaces. Timbmet stock PAR mouldings in 5 species as standard, in a range of widths and lengths. FSC® or PEFC certified mouldings are available from stock.


Other species are available on request.




Red Grandis PAR Mouldings

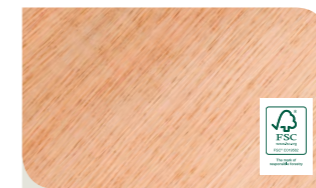

Red Hardwood PAR Mouldings

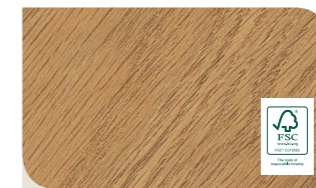


European Oak PAR Mouldings

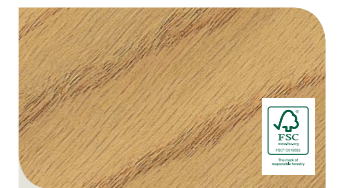

American White Oak PAR Mouldings



Meranti PAR Mouldings

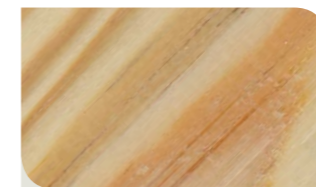

Southern Yellow Pine PAR Mouldings



Handrails, Windowboards and Sills profiles are also available to tie in with your door frame timber species.

Manufacturing and Finishing

Timbmet offers a full range of bespoke manufacturing services including the ability to mould, lacquer, stain, prime and CNC to your exact requirements.

Quick Mill Facility

We understand there are situations when something is required urgently and when time is tight, a Quick Mill service is available – in under 5 days from request – all designed to assist when the pressure is on.

Finishing

A wide range of finishing, to protect or colour the timber, is available from Timbmet. Our specialist team are available to help with any queries on timber treatment.

Priming & Lacquering

We also offer a finishing service with the ability to lacquer, paint, prime, sand and offer fire protection retardant.



Cut and Edge Service

Timbmet stocks ABS, Melamine and Real Wood Edging, and offer a cut and edge service.

Cut and Edge Service

If you'd rather receive your panels cut and edged, Timbmet can help. Our experienced team can cut panels to your specifications, and apply edging.

- ✓ ABS, Melamine & Real Wood Edging applied
- ✓ Solid lipping up to 8mm thick
- ✓ Pre-mill, corner round, flush & radius chamfer
- ✓ Different glue colours available

Roll lengths vary – please check at time of order.

For further information go to www.timbmet.com

Technical Support

Our specialist teams are on hand to provide technical advice and expertise, working with you from your initial requirements through to the finished article.





Responsible Business

Timbmet are market leaders in our commitment to the sustainability and legality of our supply base and responsible business solutions.

We have been independently audited to ensure we are compliant with the European Timber Regulation (EUTR), both as an operator and a trader. Timbmet are members of the Timber Trade Federation (TTF) and have signed up to their Responsible Purchasing Process (RPP).

We fully support independent third party certification schemes of timber products such as FSC® (Forest Stewardship Council®) and PEFC (Programme for Endorsement of Forest Certification) as the best way to demonstrate compliance with the EUTR and the RPP.

We are committed to increasing the proportion of our purchasing that is certified. Where certification is not available we investigate the origin via a robust Due Diligence process.



The mark of responsible forestry
Look for FSC® certified products.



Timbmet operate in full compliance with the EUTR

UK Coverage

Timbmet offers UK-wide coverage via our network of depots, supported by our central Shellingford Distribution Centre in Oxfordshire and our milling facility at Timbmet Glasgow.

Our depots are located in Basildon (Essex), Borehamwood (North London border), Larkfield (Kent), Poole (Dorset) and Stonehouse (Gloucester). Timbmet can deliver your order or you can collect it from one of our depots, offering you the choice.

With extensive distribution and regional depots, office and field support Timbmet provide exceptional customer service.

Timbmet... National coverage, Local service

Further Information

Our team are happy to help with any queries, or, for more information on any of our products or services please contact us:

marketing@timbmet.com

01865 860350

www.timbmet.com





Head Offices / Sales

Oxford

Kemp House
Chawley Park
Cumnor Hill
Oxford OX2 9PH
t: 01865 860350
f: 01865 864367
e: oxfsales@timbmet.com

Glasgow

235 Bogmoor Road
Shieldhall
Glasgow G51 4SH
t: 0141 440 6600
f: 0141 445 5736
e: glwsales@timbmet.com

Timbmet Global

t: +44(0) 1865 860392
e: timbmetglobal@timbmet.com

Local Depots and Distribution

Basildon

Units B1/B2
Hovefields Avenue
Burnt Mills Industrial Estate
Basildon SS13 1EB
t: 01268 246800
f: 01268 728442

Cutting
Facilities

Larkfield

Units E1/E2
Larkfield Trading Estate
New Hythe Lane
Larkfield
Kent ME20 6SW
t: 01622 718980
f: 01622 719040

Cutting
Facilities

Shellingford (Distribution)

White Horse Business Park
Ware Road
Stanford in the Vale
Oxfordshire SN7 8NY
t: 01865 860350

Borehamwood

Unit 2 Manor Place
Manor Way
Borehamwood WD6 1WG
t: 020 8238 6930
f: 020 8953 5781

Cutting
Facilities

Poole

Unit 4
Lion Works Industrial Estate
543 Wallisdown Road
Poole BH12 5AD
t: 01202 531926
f: 01202 537918

Cutting
Facilities

Stonehouse

14 Gloucester Road
Stonehouse GL10 2PB
t: 01453 826886
f: 01453 828029

Cutting
& CNC
Facilities



TIMBMET

Everything wood should be

www.timbmet.com