


9944P5

Allgood Trio 99 series vertical euro profile solenoid redlock.

- Both 'controlled' levers withdraw latchbolt when solenoid is activated
- 12 vDC fail safe
- Twin monitored
- UL listed and complies with ANSI 115.1. Suits standard ANSI preparation for metal doors
- Independently tested to BS EN 179 376B1342AB and 376B1342ABD
- CE Marked 1121-CPD-ABB035
- Certifire approved CF 623
- Incorporated in successful fire test and assessed to BS EN 1634-1 and BS 476 Pt 22 up to 90 minutes on timber doors
- 10 year mechanical guarantee, 1 year electrical guarantee

Finish: SS

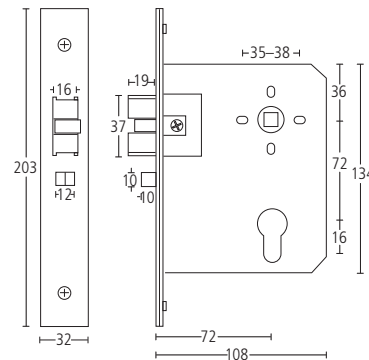

99' series redlocks are suitable for severe usage doors that require a higher degree of security. All mortice and solenoid bolts come complete with a 3 part low friction latchbolt, anti-thrust bolt and are heavily sprung for lever handles.

9944P6

As above but 24v DC