

ALONA 7



The ALONA7 downlight is constructed with a cast aluminium body for efficient heat dissipation.



The fixture is available in 90° beam angle with a high grade diffusion facia that offers homogeneous light effect and also available in 40° beam without diffuser.

The use of a remote driver ensures a low running temperature and outstanding long term performance along with ease of future maintenance.

ALONA7 offers excellent working illumination.

Various dimming options are available - Triac, 1-10V, DALI and non-dimmable.

Please order drivers separately.

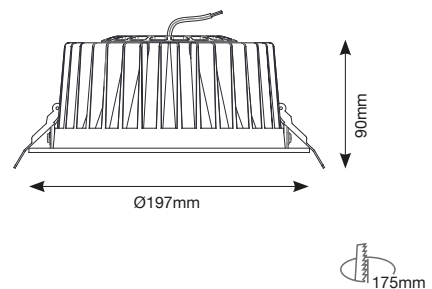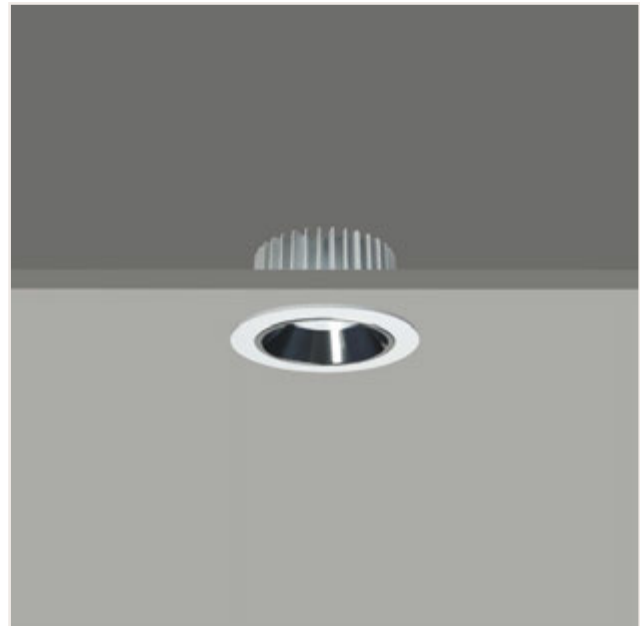

Technical Specification			
System Power Consumption	18W	26W	35W
LED Power Consumption	15W	22W	30W
CRI	Ra80 + Standard Ra90 Optional		
Luminaire Luminous Flux @CRI80	1375lm (27K) 1400lm (30K) 1460lm (40K) 1460lm (50K)	2000lm (27K) 2050lm (30K) 2120lm (40K) 2120lm (50K)	2700lm (27K) 2790lm (30K) 2910lm (40K) 2910lm (50K)
Driver	Remote		
Housing	Die-Cast Aluminium, White coated		
Cutout Opening	175mm Dia		
Dimensions	197mm Dia x 90mm H		
IP Rating	IP20 without diffuser IP43 with PMMA diffuser		
Lamp life L70	50,000 hours		
Operating Ambient Temp.	-10°C to +40°C		

Colours Available

Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

90° with diffuser
40° without diffuser

Product Code

TRY - ALONA 7 - 18W - 27K - 40 - IP20
 26W 30K 90 IP43
 35W 40K
 50K

Note: Please choose appropriate driver from Tryka range.

Product Code Example:

TRY-ALONA7-18W-30K-90-IP43

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com