

ALONA 8

The **ALONA8** downlight is constructed with a cast aluminium body for efficient heat dissipation.

The fixture is available in 90° beam angle with a high grade diffusion facia that offers homogeneous light effect and also available in 40° beam without diffuser.

The use of a remote driver ensures a low running temperature and outstanding long term performance along with ease of future maintenance.

ALONA8 offers excellent working illumination.

Various dimming options, Triac, 1-10V, DALI and non-dimmable are available.



Please order drivers separately.

Colours Available

Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

90° with diffuser
40° without diffuser

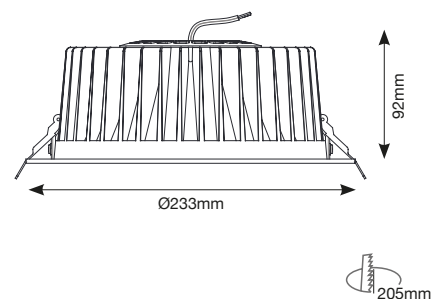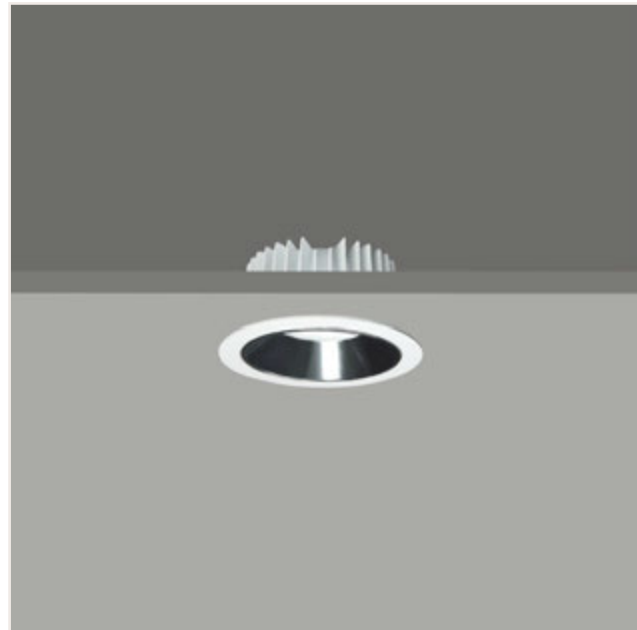

Technical Specification			
System Power Consumption	22W	30W	38W
LED Power Consumption	18W	25W	32W
CRI	Ra80 + Standard Ra90 Optional		
Luminaire Luminous Flux @CRI80	1620lm (27K) 1670lm (30K) 1750lm (40K) 1750lm (50K)	2250lm (27K) 2330lm (30K) 2430lm (40K) 2430lm (50K)	2880lm (27K) 2980lm (30K) 3100lm (40K) 3100lm (50K)
Driver	Remote		
Housing	Die-Cast Aluminium , White coated		
Cutout Opening	205mm Dia		
Dimensions	233mm Dia x 92mm H		
IP Rating	IP20 without diffuser IP43 with PMMA diffuser		
Lamp life L70	50,000 hours		
Operating Ambient Temp.	-10°C to +40°C		

Product Code

TRY - ALONA 8 - 22W - 27K - 40 - IP20
 30W 30K 90 IP43
 38W 40K
 50K

Note: Please choose appropriate driver from Tryka range.

Product Code Example:

TRY-ALONA8-22W-30K-90-IP43

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com