

# ANORA 4



ANORA4 offers a series of options and gives an excellent level of working illumination. The unit is adjustable and has various dimming options. The product is also available in special optic construction with 36 degree fresnel lens in IP44 version.

Excellent colour rendering properties, constant colour quality throughout the service life and high energy efficacy ensure it is a perfect solution for illuminating offices and other commercial lighting applications, displays in shops and showrooms.

Please order drivers separately.

## Colours Available


Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

## Optics Available

15°, 24°, 36° - Lens+Reflector
45°, 60° - Reflector



Technical Specification		
System Power Consumption	15W	18W
LED Power Consumption	12.8W	15.3W
CRI	Ra80+ Standard Ra95 Optional	
Luminaire Luminous Flux @CRI80	1350lm (27K) 1450lm (30K) 1550lm (40K) 1550m (50K)	1500lm (27K) 1600lm (30K) 1700lm (40K) 1700lm (50K)
Driver	Remote	
Adjustability	25°	
Housing	Die-Cast Aluminium	
Trim Finish	Die-Cast Aluminium, White	
Baffle Finish	White, Black	
Reflector	Polycarbonate Electroplated	
Weight	0.43kg	
IP Rating	IP20 IP65 with Clear or Frosted Glass	
Lamp life L70	50,000 hours	
Operating Ambient Temp.	-10°C to +40°C	

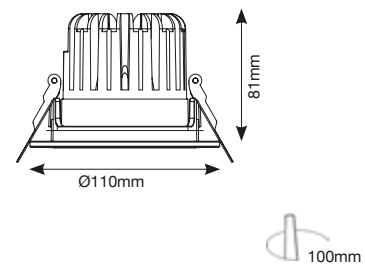

## Product Code

TRY - ANORA4 - 15W - 27K - 15 - WHITE\* - IP20  
 18W 30K 24 BLACK IP65C  
 40K 36 IP65F  
 50K 45  
 60

\*Baffle colour

Note: Please choose appropriate driver from Tryka range.

## Product Code Example:

TRY-ANORA4-18W-40K-24-IP20-ND

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

