

ANORA 5F



The ANORA5F downlight features a precisely engineered decorative float glass, integrating the fixture with the decor. It is an innovative luminaire with a balanced and elegant design offering the highest flexibility.

By using superior quality glass with a centre hole and centre frost it creates a sparkle effect in decorative applications. When switched OFF it is an interesting design element, when switched ON it takes on a completely new appearance.


It is ideal for illuminating corridors, hotel lobbies, guest rooms, offices, showrooms etc.

It is available in fixed circular shape with various dimming options - Triac, 1-10V, DALI and non-dimmable.

Please order drivers separately.



Technical Specification		
System Power Consumption	18W	26W
LED Power Consumption	15.3W	22.1W
CRI	Ra 80+ Standard Ra 95 Optional	
Luminaire Luminous Flux @ CRI80	1300lm (27K) 1400lm (30K) 1500lm (40K) 1500lm (50K)	2050lm (27K) 2200lm (30K) 2350lm (40K) 2350lm (50K)
Driver	Remote	
Adjustability	Fixed	
Housing	Die-Cast Aluminium	
Trim Finish	Die-Cast Aluminium, White	
Baffle Finish	White, Black	
Reflector	Polycarbonate Electroplated	
Weight	0.91kg	
IP Rating	IP20 IP65 with Clear or Frosted Glass	
Lamp life L70	50,000 hours	
Operating Ambient Temp.	-10°C to +40°C	

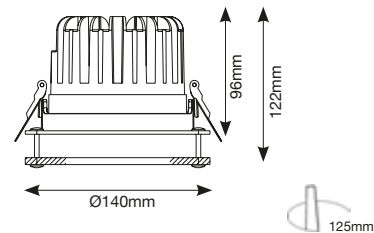

Colours Available

Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

36° - Lens + Reflector
45°, 60° - Reflector

Product Code

TRY - ANORA5F - 18W - 27K - 36 - WHITE* - IP20
 26W 30K 45 BLACK IP65C
 40K 60 IP65F
 50K

*Baffle colour

Note: Please choose appropriate driver from Tryka range.

Product Code Example:

TRY-ANORA5F-26W-40K-36-WHITE-ND

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com