

ELINOR 3



The ELINOR downlight is typical of TRYKA competency in efficient lens systems for LED luminaires. The uniquely designed housing and integrated heat management offers a clean, elegant styling, together with high technical performance combined with robustness and precision.

The unique design of the reflector/lens combination allows for various narrow to wide beam angles.

ELINOR3 downlight has excellent colour rendering properties, constant colour quality throughout the service life and high energy efficacy making it a perfect solution for illuminating hotels, receptions, lobbies and similar applications requiring high visual comfort.

Colours Available

Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K



Optics Available

15°, 22°, 34°

Technical Specification			
System Power Consumption	8W	10W	12W
LED Power Consumption	5.8W	8.5W	10.2W
CRI	Ra80+ Standard Ra95 Optional		
Luminaire Luminous Flux @CRI80	510lm (27K) 540lm (30K) 580lm (40K) 580lm (50K)	790lm (27K) 850lm (30K) 900lm (40K) 900lm (50K)	850lm (27K) 945lm (30K) 990lm (40K) 990lm (50K)
Driver	Remote		
Adjustability	25°		
Baffle Finish	Black		
Housing	Die-Cast Aluminium		
Trim Finish	Die-Cast Aluminium, White		
Weight	0.26kg		
IP Rating	IP20 IP65 with Clear or Frosted Glass		
Lamp life L70	50,000 hours		
Operating Ambient Temp.	-10°C to +40°C		

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

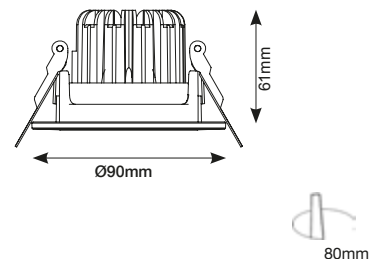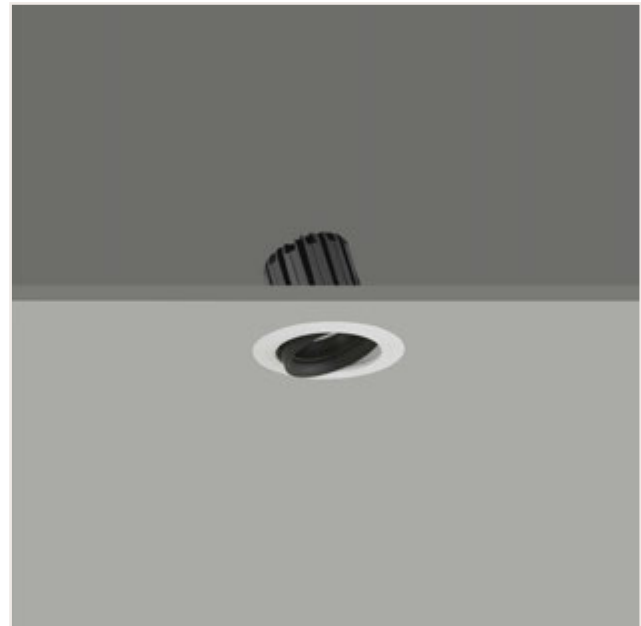

The ELINOR3 is adjustable with various dimming options - Triac, 1-10V, DALI and non-dimmable.

Please order drivers separately.

Product Code

TRY - ELINOR 3 - 8W - 27K - 15 - IP20
 10W 30K 22 IP65C
 12W 40K 34 IP65F
 50K

Note: Please choose appropriate driver from Tryka range.

Product Code Example:

TRY-ELINOR3-10W-40K-22-IP20