GROUNDLINE

GROUNDLINE is constructed using high brightness LED chips, aluminium extrusion, stainless steel trim and tempered glass suitable for inground applications.

GROUNDLINE features various colour temperatures and a symmetrical beam pattern that enables illumination of walls and structures.

The module is available in standard lengths of 575mm and 1070mm.

The standard fixture is supplied with built-in non-dimmable driver. The fixture is also available with various dimming options 1-10V, Triac, DALI or DMX with remote mounted driver.

Technical Specification		
Length	575mm	1070m
Number of LEDs	9	18
System Power Consumption	20W	40W
Input Voltage	220V 50/60Hz for Integral 24V DC for Non-Integral	
Luminaire Luminous Flux @4000K CRI80	70lm/W	
Housing Material	Aluminium	
Frame	Stainless Steel	
Diffuser	Clear Tempered Glass	
Driver	Integral for Non-Dimmable Remote for Dimmable	
Static Load	800kg	
Weight	7kg	10kg
IP Rating	IP67	
Lamp life L70	50,000hours	
Operating Ambient Temp.	-20°C to +50°C	

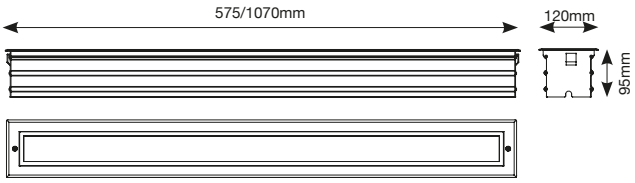

Colours Available

RGB	Cool White - 5000K
Red	Neutral White - 4000K
Green	Warm White - 2700K, 3000K
Blue	

Optics Available

25°, 40°, 60°, 12°x50°, 30°x65°

Product Code

TRY - GROUNDLINE - 575 - XX - YYY - ZZZ - 25 - IP67
1070 40
60
12x50
30x65

Notes:
Replace XX with number of LEDs
Replace YYY with wattage from the technical specification table
Replace ZZZ with 27K, 30K, 40K, 50K, RED, GRN, BLU, RGB

Product Code Example:
TRY-GROUNDLINE-1070-18-40W-30K-12x50-IP67

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

UK MANUFACTURER since 2002