

# LITA MICRO



EXTERIOR


The LITA MICRO is an IP54 rated miniature downlight or uplight designed for use in damp or internal locations. Made from a turned aluminium body and HE30 Aluminium trim that can be anodised, metallic plated or RAL painted to suit the project requirement.

The MICRO fixture has a 14mm aperture and recessed LED for glare control, using a single Cree XP-E2 LED chip, clear or opal acrylic diffuser.

The fixture is available in various colour temperatures and driver is non-integral. Please order drivers separately.



Technical Specification	
Number of LEDs	1
LED Power Consumption	1W
Luminaire Luminous Flux	94lm (2700K), 116lm (3000K), 142lm (4000K), 151lm (6000K)
Dimmability	DMX, TRIAC, 1-10V, DALI
Driver	350mA (Remote)
Input Voltage	Max. 48V
Housing	Anodised Aluminium
Trim	HE30 Aluminium (Anodised, Plated or RAL paint finished)
Diffuser	Clear or Opal Acrylic
Weight	150g
IP Rating	IP54
Lamp Life L70	>50,000 hours
Operating Ambient Temp.	-20°C to +50°C

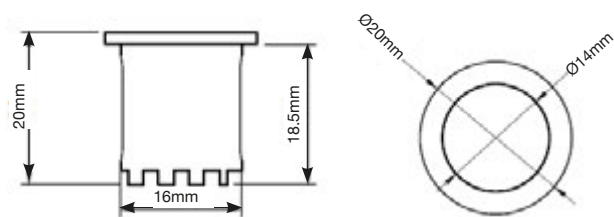

## Colours Available

Cool White - 5000K, 6000K
Neutral White - 4000K, 4500K
Warm White - 2200K, 2700K, 3000K
<span style="color: red;">•</span> Red <span style="color: green;">•</span> Green <span style="color: blue;">•</span> Blue <span style="color: orange;">•</span> Amber

## Optics Available

26°, 44°

## Product Code

TRY -LITA1 - 1W - 27K - 26- C - IP54  
 30K 44 O  
 40K  
 50K  
 RED  
 BLU  
 GRN  
 AMB

## Product Code Example:

TRY-LITA 1-1W-30K-26-C-IP54

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

