


MODU-LED 0.56W



The MODU-LED 0.56W features high brightness, robust construction modules designed for compact and space-constrained interior or exterior applications. It is available in a chain of 50 modules.

Constructed to IP68 rating with integrated mounting points and ready fitted cabling guarantee an extremely quick and easy installation. Due to its robust construction the modules are resistant to vibration and light up instantly at wide temperature ranges making it the ideal choice for even the toughest environments.

Modu-LED is suitable for facade lighting, cove lighting and back lighting of acrylic, stretch ceiling and flex sheets. The product is supplied in standard lengths of 7.6m consisting of 50 modules and can be cut to the required length as per site conditions. Standard module spacing is 152mm and two optional reduced module spacings of 83mm and 101mm can also be supplied.

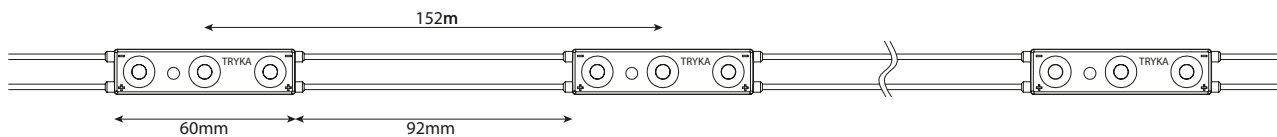

Technical Specification

Module Spacing	83mm	101mm	152mm
Power Consumption/m	6.7W	5.5W	3.7W
Luminaire Luminous Flux @ 6500K	816lm	673lm	449lm
No of Modules/m	12	9.9	6.6
String Length	7.6m		
No of Modules/string	91	75	50
Module Size	60mm L x 14.4mm W x 10.5mm H		
Input Voltage	12V DC		
IP Rating	IP68		
Lamp Life L70	50,000hrs		
Operating Ambient Temp.	-25°C to +60°C		

Colours Available

Cool White - 5000K, 6500K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

160° Batwing

Product Code

TRY - ModuLED - 0.56W - 27K	- 83
	30K 101
	40K 152
	50K
	65K

Product Code Example:

TRY-MODULED-0.56W-50K-152

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com