



MODULAR LED PANEL OVERVIEW




Designed to quickly and easily replace less efficient traditional fluorescent fittings.

Available in 600x600 or 1200x300mm variants with an array of light outputs through variable driver currents. Our Modular panel can be specified with the required performance in mind with maximum efficiency, with or without dimming controls.

In addition to the pleasing aesthetics that allow the panel to blend seamlessly in to the ceiling; Tryka have engineered our modular panel with an innovative lens and silver reflector combination capable of delivering a UGR rating <16 when installed according to the correct regulations, and UGR <19 as standard, making the panel suitable for working environments as well as study areas, educational facilities, healthcare establishments and public areas.

Offering a CRI rating of up to 95, with 3 step MacAdam BIN control & Lumen performance of 140lm/w at 3000K, or 160lm/w at 6000K.


Switched, DALI, 1-10V & TRIAC dimming modules are all available along with UK produced 3hr Emergency Back-Up packs.

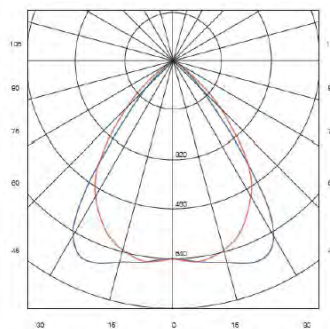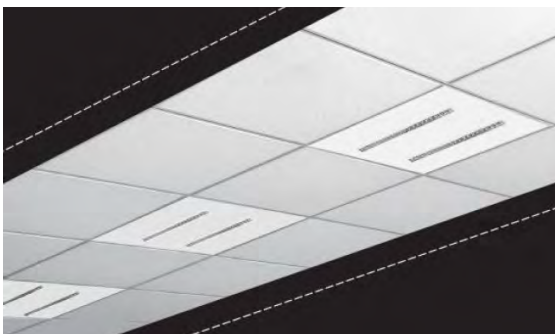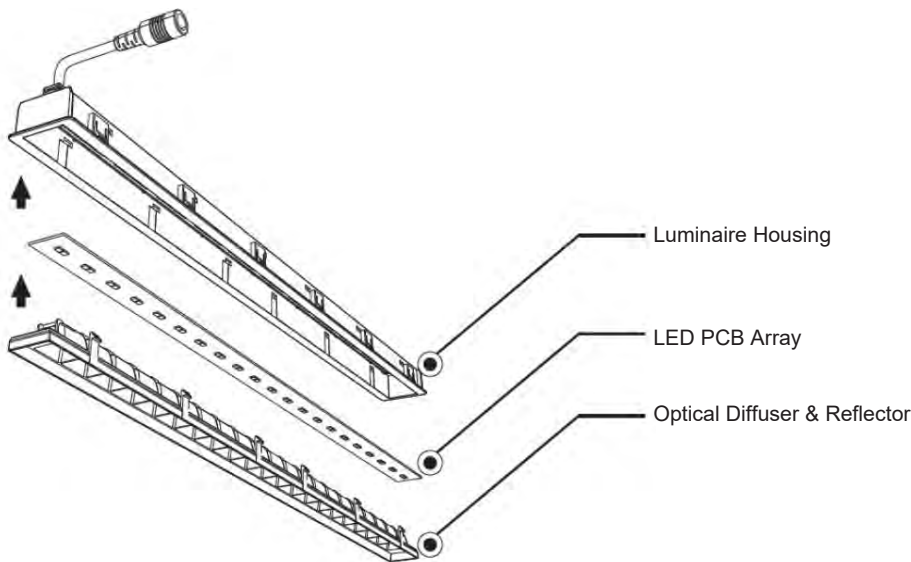

Zonal Lumen Summary

Zone	Fixture
0-30	51.16%
0-40	80.18%
0-60	99.36%
0-90	99.99%
0-120	99.99%
0-180	100%

MODULAR LED PANEL DIMENSIONS

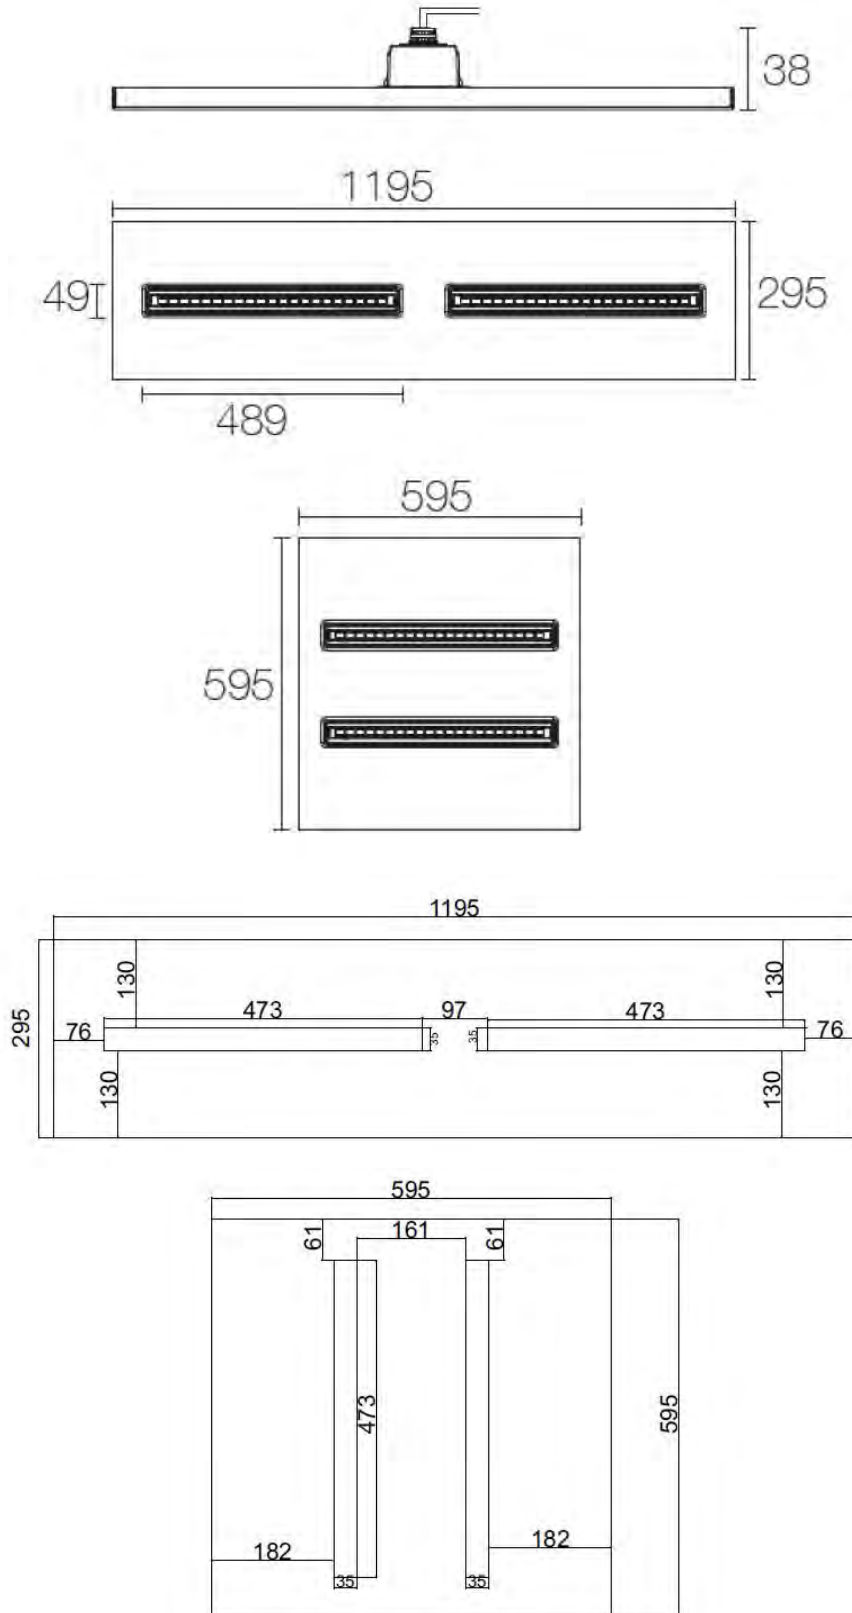

Dimensions	LED Power Consumption	Beam Angle	Weight
595 x 595 x 38mm	28W	85x70°	4.5kg
1195 x 295 x 38mm	28W	85x70°	4.8kg

Colour	Warm White -30K ²	Neutral White -40K ²	Cool White -60K ²
CCT	3000K	4000K	6000K
Lumen Output	4000 lumens	4300 lumens	4500 lumens

Product Codes

TRY-MP-6060-^{**K²}-8570-28W-UGR-¹

TRY-MP-12030-^{**K²}-8570-28W-UGR-¹

TRY-MP-EM-3HR-CC

¹Add -DALI, -110V or -TRIAC for dimming

