

# PIVOT 3




The TRYKA PIVOT series is the adjustable downlight designed to accentuate displays in interiors. The uniquely designed housing and integrated heat management offers elegant styling. The design of the reflector and lens combination enables beam patterns ranging from narrow to wide beam.

The specification includes a high quality LED and meets the challenging demands of professional lighting applications.


PIVOT3 is made of spring actuated locking mechanism that helps in smooth movement and positioning of the optical head.

The fixture features 350° rotation.

The fixture is available with various dimming options - Triac, 1-10V, DALI and non-dimmable.

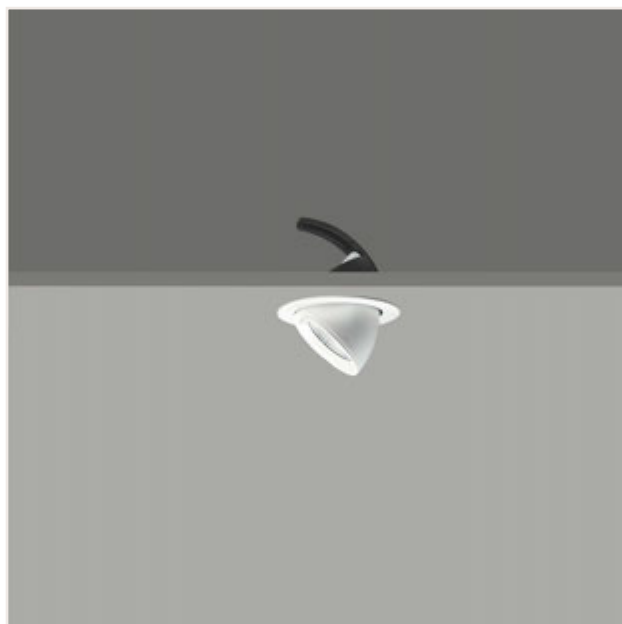

Technical Specification	
System Power Consumption	12W
LED Power Consumption	10.2W
CRI	Ra80+ Standard Ra95 Optional
Luminaire Luminous Flux	930lm (27K) 1030lm (30K) 1080lm (40K) 1080lm w(50K)
Driver	Remote
Adjustability	50° Tilt 350° Rotation
Housing	Die-Cast Aluminium
Trim	Die-Cast Aluminium
Baffle Finish	White, Black
Dimensions	89mm Dia
Weight	0.4kg
IP Rating	IP43
Lamp life L70	50,000 hours
Operating Ambient Temp.	-10°C to +40°C

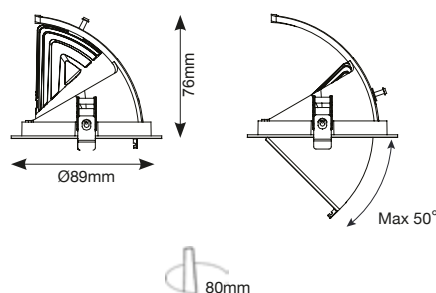

## Colours Available

Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

## Optics Available

15°, 24°, 36°
---------------

## Product Code

TRY - PIVOT3 - 12W - 27K - 15 - WHITE* - IP43
30K 24 BLACK
40K 36
50K

\*Baffle colour

Note: Please choose appropriate driver from Tryka range.

## Product Code Example:

TRY-PIVOT3-12W-30K-24-WHITE-IP43

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

