

TUBA 6



EXTERIOR

TUBA6 is available in single or double optics suitable for Up/Down lighting. The fixture is IP65 rated and is an ideal fixture for wall lighting inside and outside.

TUBA6 is also available in a ceiling mount version with single optics.

The fixture body is made of aluminium and the driver is built-in within the fixture for easy installation.

Colours Available


Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

12°, 24°, 36°



Technical Specification	
LED Power Consumption	1x18W, 2x18W, 1x25W, 2x25W
Luminaire Luminous Flux @ 3000K CRI80	18W - 1250lm 25W - 1730lm
Driver	Integral
Input Voltage	220-240V 50/60Hz
Housing	Aluminium
Body Finish	White, Grey
Mounting Type	Wall or Ceiling surface
Dimensions	Single Optic - 215mm H x 160mm W x 212mm D Double Optic - 320mm H x 160mm W x 212mm D
IP Rating	IP65
Lamp Life L70	50,000 hours
Operating Ambient Temp.	-10°C to +50°C

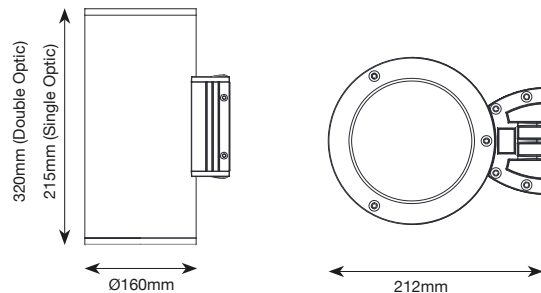

Product Code

TRY- TUBA6 - 1x18W - 27K - 12 - WHITE - W - IP65
 2x18W 30K 24 GREY C
 1x25W 40K 36
 2x25W 50K

Notes:

W - Wall mount version
 C - Ceiling mount version (single optic only)

Product Code Example:

TRY-TUBA6-2X18W-40K-12-WHITE-W-IP65

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

