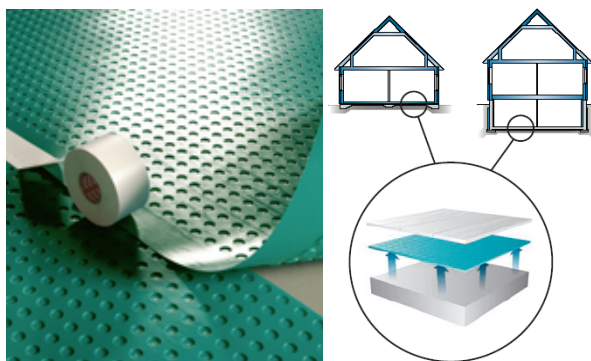


**Moisturbloc Extreme™****Description:**

- Can be installed on subfloors with up to 95% relative humidity
- Ideal for installation in basements and on subfloors with high moisture level
- Early installation in new buildings possible
- Compatible with floor heating
- Installation tape included
- No other underlay needed
- Rigid construction - very suitable for installation under click floors

**Characteristics:**

Properties	Test method	Typical result
Material		Polypropylene (PP)
Shape		Roll
Thermal resistance (R-value)	ISO 12667	0,048 m <sup>2</sup> K/W
Density		900 kg/m <sup>3</sup>
Water vapor resistance (z)	EN ISO 12572	1,1 x 10 <sup>6</sup> s/m

**Demographics:**

Product (article no)	Length m	Width m	Thickness mm	Quantity m <sup>2</sup>	Weight kg
Moisturbloc Extreme, 45025	15	1,05	2,5	15	8,5

**Installation instruction:**


The floor must be clean, dry and flat.

Unroll the first strip on the subfloor with the nubs facing down and cut it to the size required using a cutter.

The product should be installed with an overlap of 50 mm.

Seal the joints with the tape included in the package.

Continue until the entire space is covered.

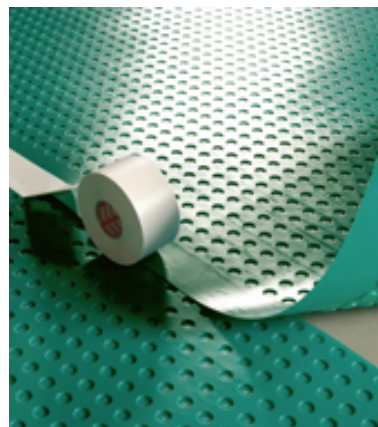

Please Note: Specifications and features in this TDS could be subject to change without notice!