
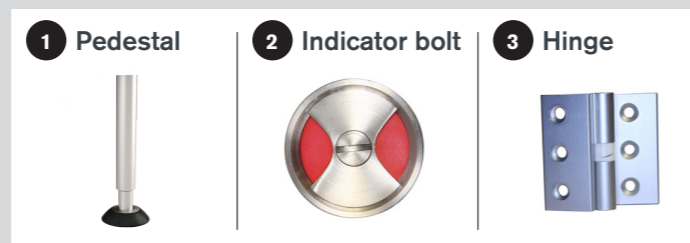


Technical Specifying System M

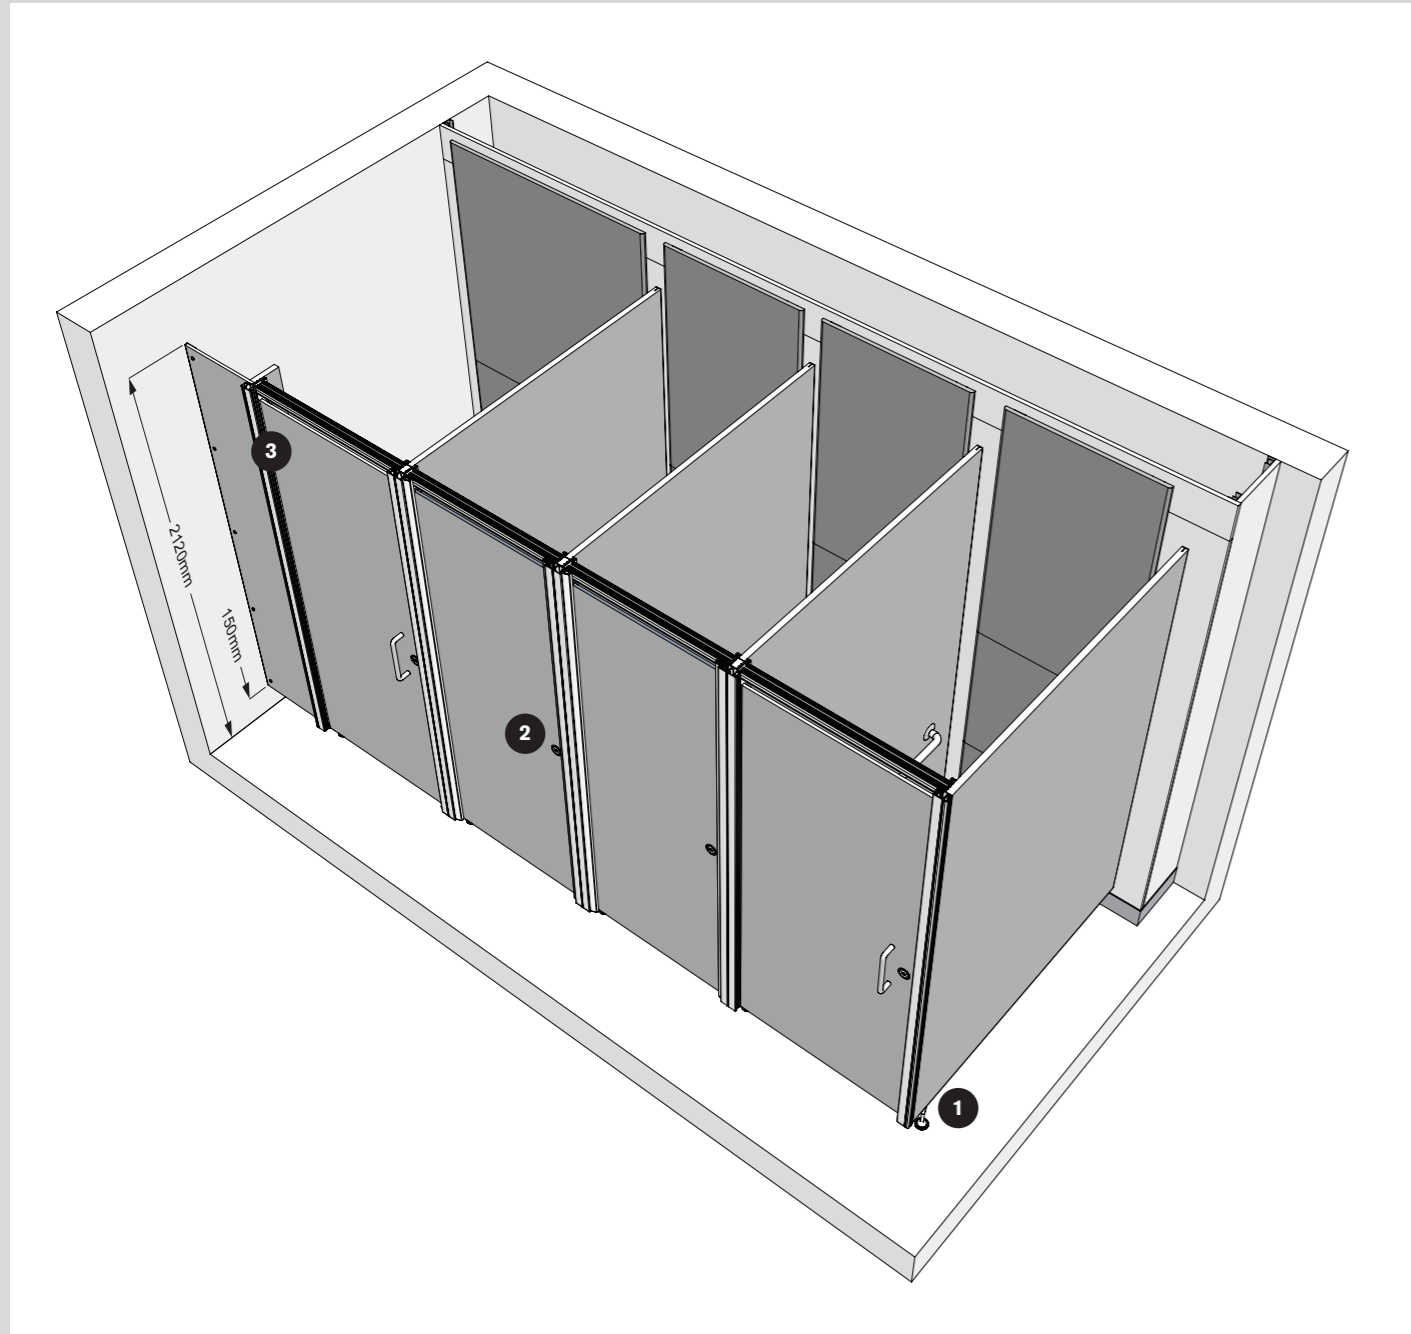

Dimensions

Standard height
2120mm

Maximum depth
2068mm

Floor clearance
150mm

Minimum ceiling clearance
100mm

Performance

System M cubicle partitions are manufactured in 26mm medium density fibreboard (MDF) faced both sides with high pressure laminate (HPL) and lipped with ABS.

Doors are manufactured in 13mm solid grade laminate (SGL) with radiused edges.

HPL
For more heavily used washrooms, panels are heat, scratch and impact resistant.

SGL
Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water.

Detailing

Panels and doors
HPL panels and SGL and doors.

Colour finish
HPL and SGL
34 colours from the standard range.
Cubicle hardware
Stainless steel and satin anodised aluminium.

Edge treatment
HPL
Matching ABS lipping.
SGL
Polished black radiused edge.

Headrail
High strength satin anodised aluminium U-section headrail.

Pilasters
Unique, patented, pivoting high strength satin anodised aluminium shaped pilaster fixed to cubicle partition. Pilasters allow doors to open outwards in an emergency.

Cubicle hardware
Indicator bolt
Stainless steel circular faced indicator bolt with emergency release and nylon keep.

Hinge
Satin anodised aluminium anti-tamper lift off rise and fall hinge.

Pedestal
150mm stainless steel height adjustable pedestal.

Fixings
Partition to wall: satin anodised aluminium T-section.

Accessories
Coat hooks and toilet roll holders available.