
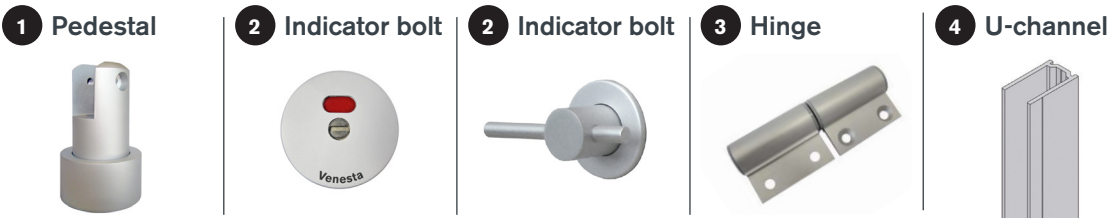


Technical Specifying Unity

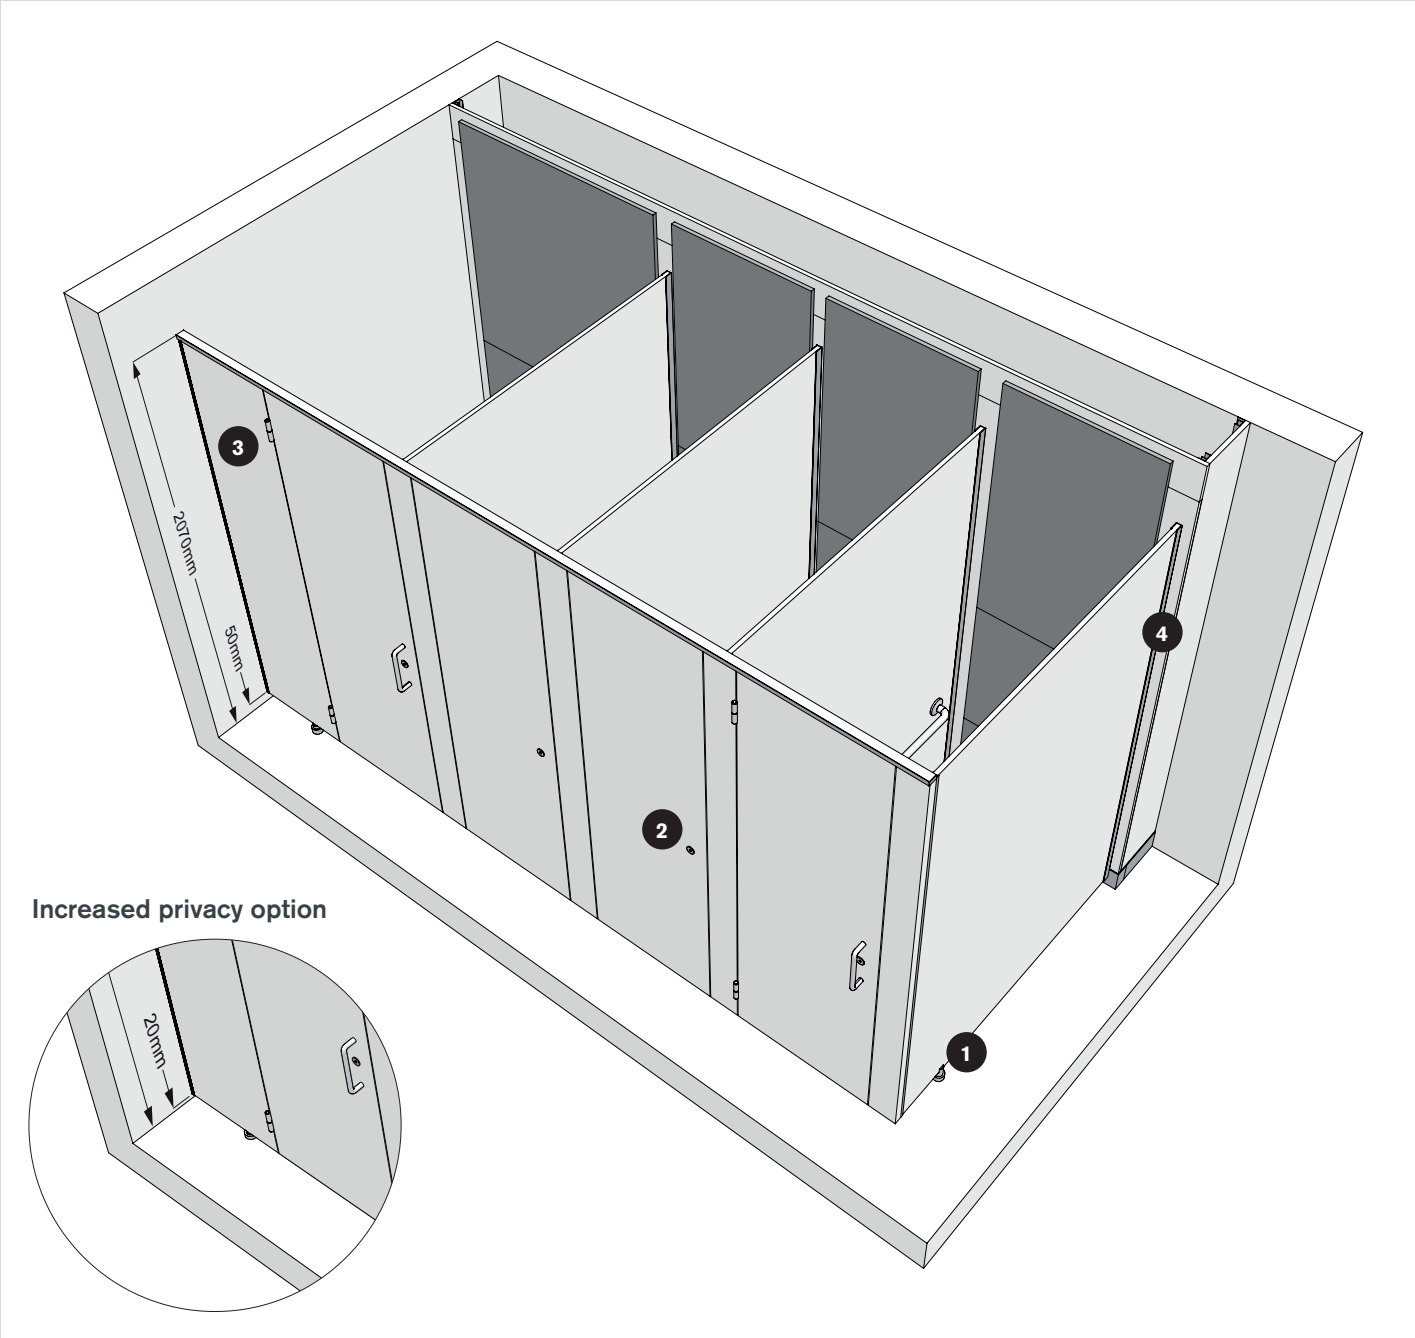

Dimensions

Unity	
Overall height	
HPL	2070mm
SGL	2065mm
ColourCoat	2070mm
High Gloss	2070mm

Maximum depth	
HPL	2084mm
SGL	1921mm
ColourCoat	2084mm
High Gloss	2084mm

Floor clearance	50mm
------------------------	------

Minimum ceiling clearance	20mm
----------------------------------	------

Unity Full Height	
Maximum height	
HPL	2840mm
SGL	2823mm
ColourCoat	2840mm
High Gloss	2840mm

Maximum depth	
HPL	2084mm
SGL	1921mm
ColourCoat	2084mm
High Gloss	2084mm

Floor clearance	50mm
------------------------	------

Minimum ceiling clearance	20mm
----------------------------------	------

Unity Full Height Privacy	
Overall height	
HPL	2040mm
SGL	2035mm
ColourCoat	2040mm
High Gloss	2040mm

Maximum height	
HPL	2810mm
SGL	2793mm
ColourCoat	2810mm
High Gloss	2810mm

Maximum depth	
HPL	2035mm
SGL	1921mm
ColourCoat	2035mm
High Gloss	2035mm

Floor clearance	20mm (cubicle standard height will drop by 30mm and partitions will sit on privacy skirting with end cap)
------------------------	---

Minimum ceiling clearance	20mm
----------------------------------	------

Performance

Available in four material options, Unity is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet the site requirements and your budget.

HPL
For more heavily used washrooms, panels are heat, scratch, impact and cigarette burn resistant. Moisture-resistant chipboard faced with high pressure laminate. Edges lipped with ABS. Doors and pilasters are 35mm nominal thickness with an MDF core, partitions are 19mm nominal thickness.

SGL
Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

ColourCoat
Panels have an MDF core. Doors and pilasters are sprayed with a coat of primer and finished with 20% gloss pigmented lacquer. Doors and pilasters are 35mm nominal thickness, partitions are 18mm nominal thickness.

ColourCoat High Gloss
Panels have an MDF core. Doors and pilasters are sprayed with a coat of primer and finished with 80% gloss pigmented lacquer. Doors and pilasters are 35mm nominal thickness, partitions are 18mm nominal thickness.

Detailing

Panels and doors
Available in HPL, SGL, ColourCoat and ColourCoat High Gloss.

Colour finish
HPL and SGL
34 colours from the standard range.
ColourCoat and ColourCoat High Gloss
10 colours.
Cubicle hardware
Satin anodised aluminium and stainless steel.

Edge treatment
HPL
Matching ABS lipping.
SGL
Polished black radiused edge.
ColourCoat
Edges sprayed with a coat of primer and finished with 20% gloss pigmented lacquer.
ColourCoat High Gloss
Edges are sprayed with a coat of primer and finished with 80% gloss pigmented lacquer.

Headrail
Slimline aluminium profile headrail in satin anodised finish. 3 part fixing system which allows cubicles to finish only 20mm below ceiling height.

Cubicle hardware
Indicator bolt
Satin anodised aluminium flip indicator bolt with emergency release facility and faceplate. 35mm doors have an internal mortice lock. All with concealed fixings.
Hinge
Satin anodised aluminium modular rise and fall butt hinge, set to fall open or closed.
Pedestal
50mm FC: Adjustable satin anodised aluminium pedestal with a ± 5 mm tolerance.
20mm FC: In-line stainless steel pedestal with a tolerance 5mm. Satin anodised aluminium partition skirting.
Fixings
Partition to wall: Satin anodised aluminium U-channel.
Pilaster to partition: Satin anodised aluminium U-channel.
Pilaster to wall: Satin anodised aluminium L-angle 13mm (SGL), E-channel 36mm (HPL, CC and CCHG).

Accessories
Coat hooks and toilet roll holders available.