C40

230v

24v

400N 40kg

100-500mm
adjustable

CHAIN ACTUATOR

top hung

vertical mounting

bottom hung

DIMENSIONS

top hung

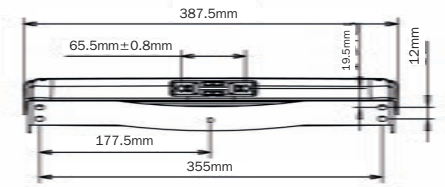

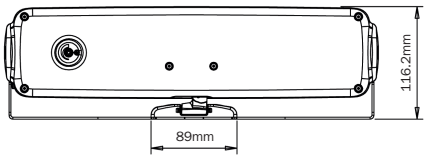

vertical mounting

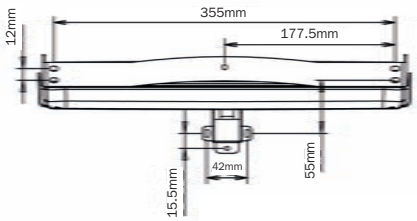

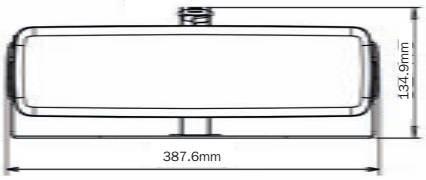

bottom hung

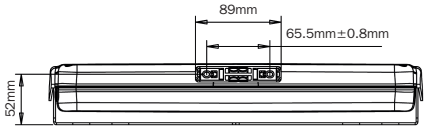

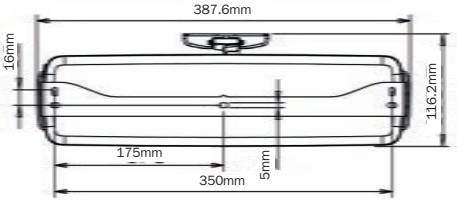

FIXINGS AND BRACKETS AVAILABLE

top hung bracket



vertical mounting bracket



bottom hung bracket



VENT ENGINEERING

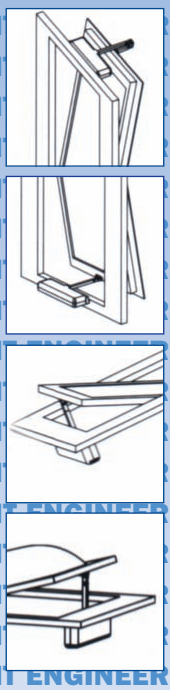

230v

24v

400N 40kg

100-500mm adjustable

C40

TECHNICAL SPECIFICATIONS

	C40 230v	C40 24v
Voltage Supply	230v	24v
Thrust Force	400N	400N
Traction Force	400N	400N
Stroke	100 - 500mm adjustable	100 - 500mm adjustable
Absorbed Current	0.24 amps	1.1 amps
Time Rating	S2 3mins	S2 3mins
Limit Stop	electronic	electronic
Safety Stop	electronic	electronic
Wiring	3 core	2 core
Speed	~ 21mm/s	~ 18mm/s
Double Insulated	yes	no
Protection Class	IP55	IP55
Parallel Connection Option	no	no
Weight	1.9kg	1.9kg
Colours Available	white / black / grey	white / black / grey

PRODUCT SUMMARY

- Double link chain with very high resistance on top loads.
- Adjustment of the stroke in seven positions from 100 to 500mm.
- Central exit of chain.
- Fast hooking and unhooking system of the chain to window.
- Simple swivel back plane, fast and suitable for windows of any type and size.
- Electronic traction control speed reduction, during the last 100mm of closing action.
- Tilting bracket with additional adjustment of 15mm, for use on overhung windows.
- Buzzer to indicate wrong installation.
- High protection degree IP 55.

PRODUCT CODES

PRODUCT CODE	PRODUCT DESCRIPTION
AT-C40-230	C40 230v
AT-C40-24	C40 24v

vent engineering

NO ONE OPENS MORE VENTS
tel 01202 744958, fax 01202 733026
email info@vent.co.uk website www.vent.co.uk
Units 16c & 16f, Chalwyn Industrial Estate, Poole BH12 4PE

VENT ENGINEERING