MICRO L

230v

24v

350N | 35kg

280mm/380mm

CHAIN ACTUATOR

DIMENSIONS

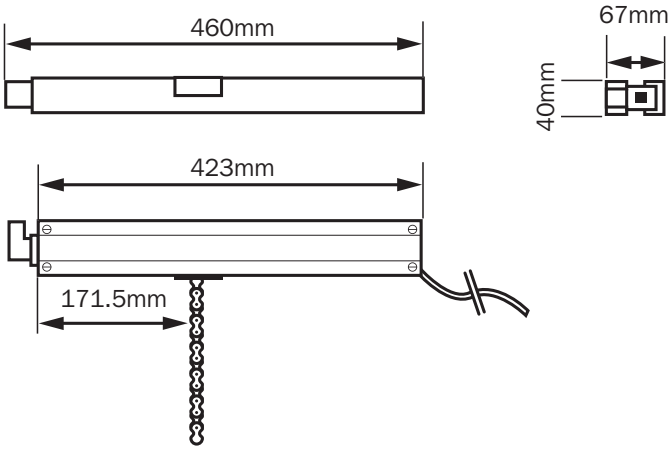

FIXINGS AND BRACKETS AVAILABLE

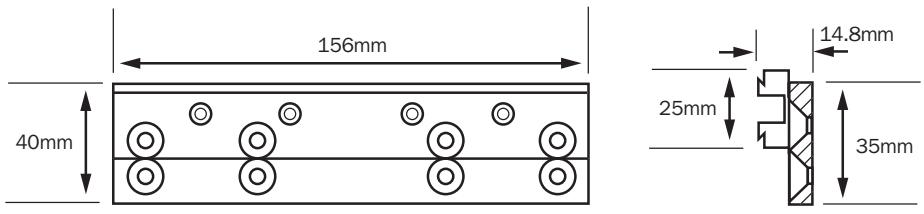





VENT ENGINEERING

230v

24v

350N | 35kg

280mm/380mm

MICRO L

TECHNICAL SPECIFICATIONS

	MICRO L 230v	MICRO L 24v
Voltage Supply	230v	24v
Thrust Force	350N	350N
Traction Force	350N	350N
Stroke	280mm, 380mm	280mm, 380mm
Absorbed Current	0.45 amps	1 amps
Time Rating	4 min	50%
Limit Stop	reed	reed
Safety Stop	thermic	thermic
Wiring	4 core	2 core
Speed	~ 18mm/s	~ 19mm/s
Double Insulated	no	no
Protection Class	IP22	IP22
Parallel Connection Option	yes	yes
Weight	1.70kg, 1.86kg	1.45kg, 1.59kg
Colours Available	black or silver	black or silver

UPGRADE available

- Can be powder coated to any RAL colour

PRODUCT SUMMARY

- Maintenance free.
- Extended stroke.
- Low consumption.
- Noiseless operation.
- Protective limit switch (24v dc version).
- Electric actuator with reinforced double-sprocket chain inside the actuator body.
- Fitted with electronic limit switch system, which can be connected in parallel.
- Complies with 73/23 LVD - 89/336 EMC directives, as modified by 93/68 CE

PRODUCT CODES

PRODUCT CODE	PRODUCT DESCRIPTION
AD-ML-280-24	Micro L 280mm 24v
AD-ML-280-240	Micro L 280mm 230v
AD-ML-380-24	Micro L 380mm 24v
AD-ML-380-240	Micro L 380mm 230v

VENT ENGINEERING

vent engineering

NO ONE OPENS MORE VENTS
tel 01202 744958, fax 01202 733026
email info@vent.co.uk website www.vent.co.uk
Units 16c & 16f, Chalwyn Industrial Estate, Poole BH12 4PE