C30

230v

24v

300N | 30kg

200-380mm
adjustable

CHAIN ACTUATOR

DIMENSIONS

top hung

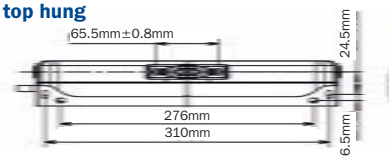

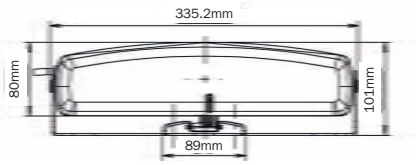

vertical mounting

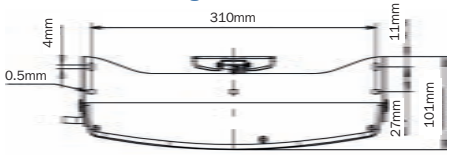



bottom hung

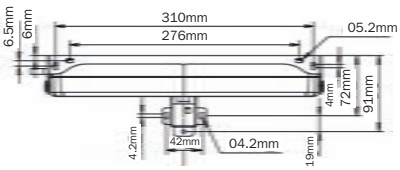



FIXINGS AND BRACKETS AVAILABLE

top hung bracket



vertical mounting bracket



bottom hung bracket











VENT ENGINEERING

230v

24v

300N 30kg

200-380mm adjustable

C30

TECHNICAL SPECIFICATIONS

	C30 230v	C30 24v
Voltage Supply	230v	24v
Thrust Force	300N	300N
Traction Force	300N	300N
Stroke	200mm / 380mm	200mm / 380mm
Absorbed Current	0.32 amps	1.3 amps
Time Rating	S2 3mins	S2 3mins
Limit Stop	electronic	electronic
Safety Stop	electronic	electronic
Wiring	3 core	2 core
Speed	~ 24mm/s	~ 19mm/s
Double Insulated	yes	no
Protection Class	IP30	IP30
Parallel Connection Option	no	no
Weight	1.1kg	1.1kg
Colours Available	white / black / grey	white / black / grey

PRODUCT SUMMARY

- Double link chain with very high resistance on top loads.
- Possibility of adjustment of the stroke at 200 or 380mm, simple and fast.
- Central exit of double link chain.
- Double insulated electrics.
- Fast hooking and unhooking of chain to window.
- Simple swivel bracket for fast installation.
- Fast adjustment of (closing) end stop from 0-15mm
- Tilting bracket with additional adjustment of 15mm, for use on overhung windows.
- Buzzer to indicate wrong installation.

PRODUCT CODES

PRODUCT CODE	PRODUCT DESCRIPTION
AT-C30-230	C30 230v
AT-C30-24	C30 24v

VENT ENGINEERING

vent engineering
NO ONE OPENS MORE VENTS
tel 01202 744958, fax 01202 733026
email info@vent.co.uk website www.vent.co.uk
Units 16c & 16f, Chalwyn Industrial Estate, Poole BH12 4PE