


## SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall


30 - 75 mm ( 1 1/4 - 3" ) Expansion Gaps

# MaxAtec 100 : B07-B09

### MaxAtec 100 : B07

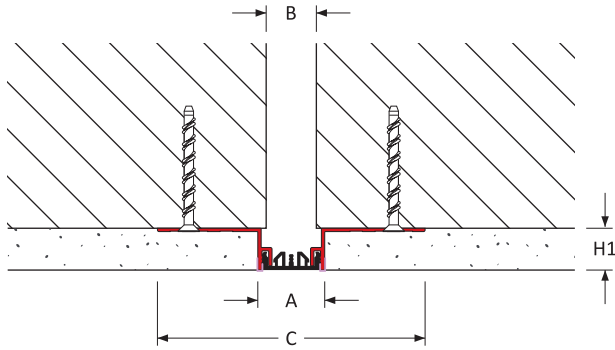

### MaxAtec 100 : B09

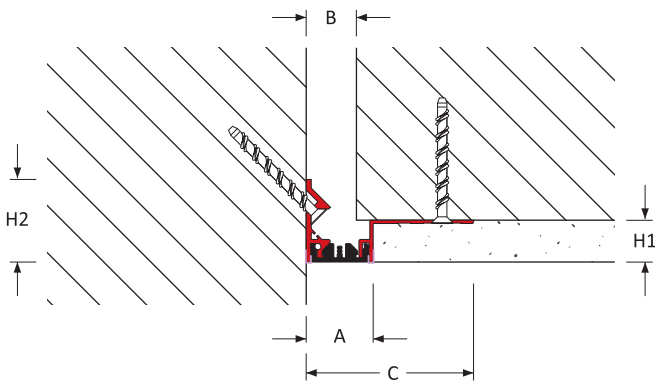

### Expansion Joint Selection Criteria

### Load Rating

### Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall - Wall	30	± 5	[10]	-	-	-	-	10: 15: 25	-	40	160	100-B07-030-(H1)
	50	± 10	[20]	-	-	-	-			71	191	100-B07-050-(H1)
	75	± 15	[30]	-	-	-	-			93	213	100-B07-075-(H1)
Corner Wall	30	± 5	[10]	-	-	-	-	10: 15: 25	49	40	100	100-B09-030-(H1)
	50	± 10	[20]	-	-	-	-			71	131	100-B09-050-(H1)
	75	± 15	[30]	-	-	-	-			93	151	100-B09-075-(H1)

When specifying or ordering please add the **height (H1)** required to the Product Reference.  
For example MaxAtec 100 : B07-030-015 denotes a joint 15mm high.

## Features

### Surface

Smooth surface

### Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

## Traffic Frequency per day



- - - - -

## System Options

Gap width(s)	30, 50, 75 mm
Height(s)	10, 15, 25 mm
Metal type(s)	Aluminium
	Bass cappings
Seal colour(s)	Black, Grey, Stone
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

# MaxAtec 100 : B07-B09



## APPLICATIONS

Airport Terminals | Educational | Exhibition Centres  
 Department Stores | Distribution & Retail Warehouses  
 Factories | Hospitals | Museums | Offices & Hotels  
 Parking | Places of Worship | Residential Buildings  
 Rail, Metros & Elevated Rail Stations | Roads & Bridges  
 Shopping Centres | Sports Stadiums | Supermarkets