


SINGLE-SEAL EXPANSION JOINT

Wall to Wall | Corner Wall


25 - 50 mm (1 - 2") Expansion Gaps

MaxAtec 130 : S07-S09

MaxAtec 130 : S07

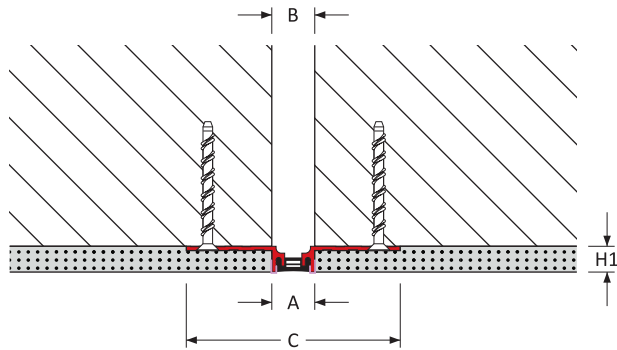

MaxAtec 130 : S09

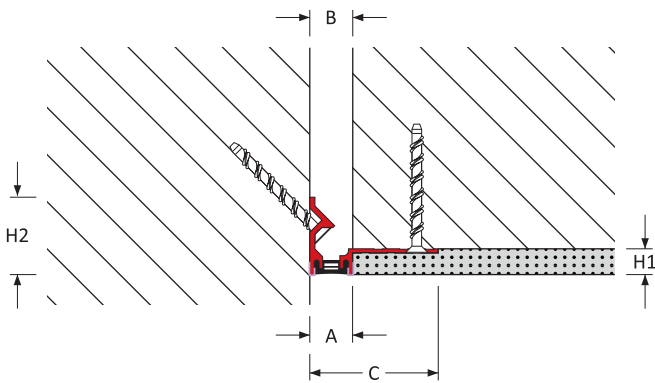

Expansion Joint Selection Criteria

Load Rating

Product Details

Joint Location	Gap Width B (mm)	Movement Capacity (mm)		Eurocode Rating				Product Dimensions Height		Sightline A (mm)	Blockout C (mm)	Product Number
		±	[Total]					H1 (mm)	H2 (mm)			
Wall - Wall	25	± 5	[10]	-	-	-	-	10:15	-	25	125	130-S07-025
	50	± 10	[20]	-	-	-	-			47	147	130-S07-050
Corner Wall	25	± 5	[10]	-	-	-	-	10:15	45	25	75	130-S09-025
	50	± 10	[20]	-	-	-	-			47	97	130-S09-050

Features

Surface

Smooth surface

Movement

Good movement capacity

ASTM E-1399 Class I: Thermal

Class II: Wind

Traffic Frequency per day



- - - - -

System Options

Gap width(s)	25, 50 mm
Height(s)	10, 15 mm
Metal type(s)	Aluminium
	Stainless Steel cappings
Seal colour(s)	Black, Grey, Stone
Fire barrier	120-240 minutes
Waterproofing	Moisture barrier
Pre-assembly in factory	Contact Vexcolt

MaxAtec 130 : S07-S09



APPLICATIONS

Airport Terminals | Educational | Exhibition Centres
 Department Stores | Distribution & Retail Warehouses
 Factories | Hospitals | Museums | Offices & Hotels
 Parking | Places of Worship | Residential Buildings
 Rail, Metros & Elevated Rail Stations | Roads & Bridges
 Shopping Centres | Sports Stadiums | Supermarkets