

# Accent

Track mounted adjustable LED spotlight for accent lighting

Whitecroft  
lighting

IP20

LED



Accent, black



Direct D3 Surface Mount

## Optics

- Nominal 1000 and 1750 lumens (12W and 21W)
- 3000K and 4000K colour temperatures
- Ra >80
- Narrow, medium and wide optics (20°, 26° and 36° beam angles)
- 60,000 hours to L70B10

## Body

- For use with Whitecroft Direct D3 track (3 circuit and Dali dimming)
- Global Pro track adaptor
- IP20
- Extruded aluminium body
- White RAL 9010 or black RAL 9005 finish
- Fixed output and DALI dimming options
- Electrical Class 1
- >0.9 power factor
- Suitable for ambient temperatures -25 to +25°C
- Stand-alone emergency available (see Direct D3 Track web page)
- Surface mounting adapter for use without track

## Order codes

### Options

| Version                        | Fixed Output, white | Fixed Output, black | LL/CW | L70 |
|--------------------------------|---------------------|---------------------|-------|-----|
| 998 lumen, 12W, narrow, 4000K  | UAH14KWN            | UAH14KBN            | 85    | 60k |
| 1046 lumen, 12W, medium, 4000K | UAH14KWM            | UAH14KBM            | 89    | 60k |
| 945 lumen, 12W, wide, 4000K    | UAH14KWW            | UAH14KBW            | 79    | 60k |
| 1683 lumen, 21W, narrow, 4000K | UAH24KWN            | UAH24KBN            | 83    | 60k |
| 1965 lumen, 21W, medium, 4000K | UAH24KWM            | UAH24KBM            | 96    | 60k |
| 1595 lumen, 21W, wide, 4000K   | UAH24KWW            | UAH24KBW            | 80    | 60k |

### Options

|              |                   |               |
|--------------|-------------------|---------------|
| DALI dimming | Change 'H' to 'Y' | i.e. UAY14KWN |
| 3000K        | Change '4' to '3' | i.e. UAH13KWN |


### Accessories/Attachments

| Title  | Code   |
|--|--------|
| Surface adapter, white                                   | DDCLGW |
| Surface adapter, black                                   | DDCLGB |
| For compatible 3 circuit and Dali track, see 'Direct D3' |        |

## LED Performance


| Colour Temp   | RA (CRI) | Colour consistency |
|---------------|----------|--------------------|
| 3000K / 4000K | 80       | MacAdam 3 SDCM     |

## Dimensions

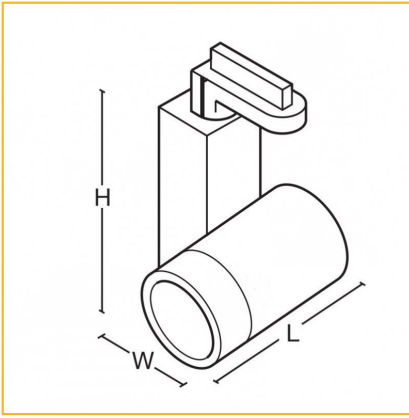


| VERSION    | L   | W   | H   | KG  |
|------------|-----|-----|-----|-----|
| 1000 lumen | 122 | 130 | 145 | 0.9 |
| 1750 lumen | 122 | 130 | 145 | 0.9 |


## Photometric Performance



4000K 1683 lm  
22W Narrow  
LOR = 100%



4000K 1965 lm  
22W Medium  
LOR = 100%

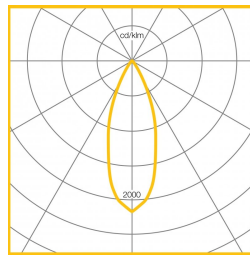

4000K 1595 lm  
22W Wide  
LOR = 100%

## To Specify

Track mounted LED spotlight with integrated driver, fixed output or DALI dimming. Extruded aluminium body with choice of narrow, medium or wide distribution with fully adjustable swivel and tilt - as Whitecroft Lighting ACCENT.