

# Broadwalk Quad

Wall recessed luminaire for outdoor applications

Whitecroft  
lighting

IP54

LED



Grille

## Optics

- Light output options:
  - 144 lumens (4000K - 3.3W, grille)
  - 171 lumens (4000K - 3.3W, smooth)
- Plexiglass diffuser
- Smooth optic or grille options
- 3000K and 4000K LED

## Body

- UV stabilised nylon
- Die cast aluminium frame
- Coated for corrosion, saline and UV resistance
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- IP54 rated protection
- Finished in graphite grey
- Closest RAL Colour: Grey RAL7024

## Order codes

Description	Code	LL/CW	L70
LED 144 lumen (3.3W) Grille	BQG14K	43	50k
LED 171 lumen (3.3W) Smooth	BQS14K	52	50k


## Options

3000K LED                      Change '4K' to '3K'                      ie. BQG13K

## LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>70	MacAdam 4 SDCM

## Dimensions

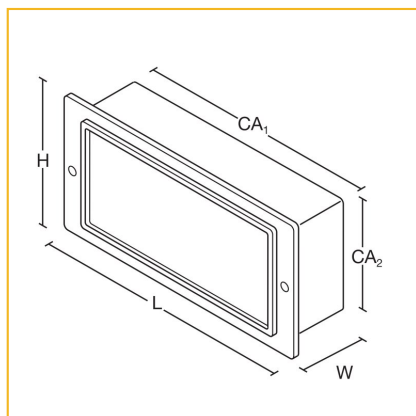

L	W	H	KG	Cut Aperture	Cut Aperture 2
223	89	114	0.6	215	110

# Photometric Performance

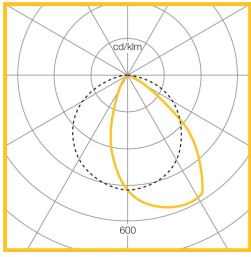

Grille 3.3W 144  
Lumen  
LOR = 100.0%

---

## To Specify

IP54 Wall recessed LED luminaire with die cast aluminium frame. With grille or smooth front optic – as Whitecroft Lighting BROADWALK QUAD

---