


# Command Professional LON / DALI Controller

Whitecroft  
lighting

A range of LON / DALI controllers for up to 4 x 64 DALI devices

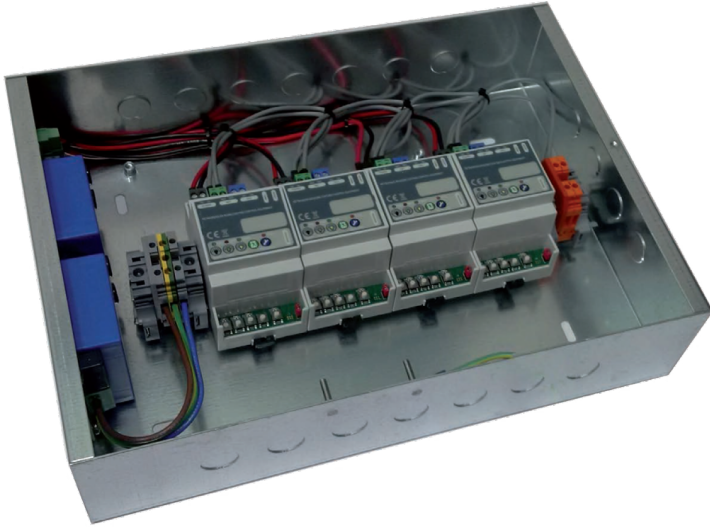

## Features

- Fully networked solution
- Configured to control up to 4 x 64 addresses
- DALI bus short circuit protection
- LED indicator for power, network, DALI
- 250 mA drive per DALI bus
- Fail-safe mode to occupied state
- Override buttons
  - Broadcast off
  - Broadcast on
  - Broadcast dim

## Specification

- Mains supply
  - 100 - 230VAc; 47-63 Hz
- Networking
  - LonWorks™ network TP/FT-10 (Capacitor Decoupled)
- Connections
  - Mains input
  - L, E, N Screw terminal connections
  - DALI Bus
  - D1, D2 screw terminal connections for each DALI channel bus
- Output
  - 2 independent DALI bus outputs (Each for 64 DALI addresses)
  - Output isolation: 4 kV
  - Connection: Rising clamp screw terminal
- Conformity & Standards
  - Generic emission : EN 50081-1
  - Generic immunity: EN 50082-1
  - RFI : EN 55014
  - LonMark™ compliant
  - DALI compliant
- Operating Temperature
  - 0°C to +40°C
- Operating Humidity
  - 10% to 90% non condensing
- Safety
  - EN 60950
  - Isolation: 4kV between mains & outputs
- Installation
  - At an accessible height but no higher than 1.5 metres

---

## Order codes

CONTROLLER (1 X 64)	COMPF1CRL
CONTROLLER (2 X 64)	COMPF2CRL
CONTROLLER (3 X 64)	COMPF3CRL
CONTROLLER (4 X 64)	COMPF4CRL

## Dimensions

**Warning:** Division by zero in `/var/www/vhosts/whitecroftc4w.com/httpdocs/admin/template_inc/product.datasheet/dimensions.php` on line 76

## To Specify

LON/DALI controller, a fully networked solution configured to control up to 4 x 64 addresses - as Whitecroft Lighting COMMAND PROFESSIONAL LON / DALI CONTROLLER.

---