


SPECIFICATION:

Lamp type: LED
Output: 1100lm /2000lm nominal.
Colour: 3000°K/4000°K - Ra80 (830/840)



Materials:
Body: White Polycarbonate
Reflector: Textured specular Anodised Aluminium
Diffuser: Polycarbonate


Control gear: Fixed output / Dali
Emergency: Integral 3hr / COMEPS
Supply: 240v 50Hz AC
Ambient Temperature: 0-25°C
Supply flex: 0.5 - 2.5mm². 10-11mm stripped.
Terminal block type: Push-wire (non-EM) / piano-key (EM)
Ingress protection: IP44 (from below)

GENERAL INFORMATION

1. A qualified electrician, in accordance with IEE wiring regulations should carry out connection to mains wiring.
2. Observe ESD precautions during installation.
3. This unit must be EARTHED.
4. Ensure that the rated voltage and frequency requirements are compatible with the available mains supply.
5. Cleaning of reflectors and lenses should be carried out using clean, soft and lint free cloths and anti-static cleaning fluid
6. Do not carry out high voltage insulation test, i.e. 500/1000v this may damage internal components.

TECHNICAL SUPPORT
Telephone: 0161 331 5700
E-mail: technical@whitecroftlight.com
<http://www.whitecroftlighting.com/>

Whitecroft
lighting

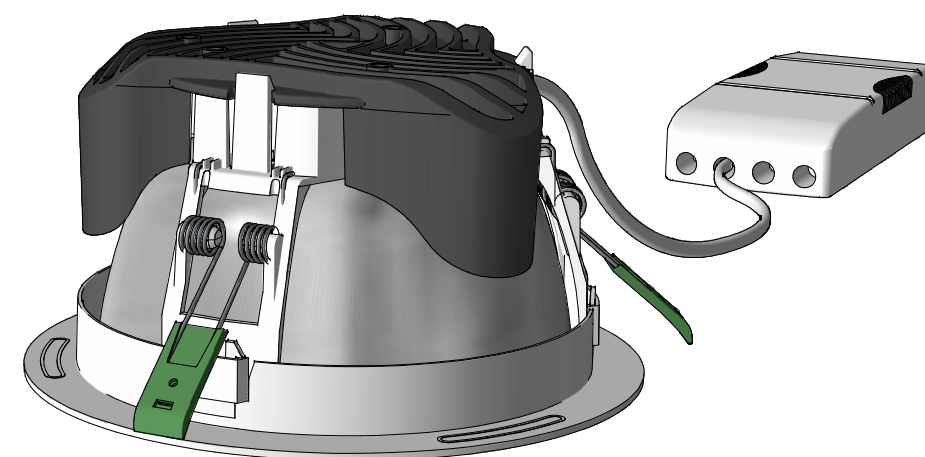

Installation sheet

Esprit LED






PK/ESLINST


Whitecroft Lighting Limited

Burlington Street, Ashton-under-Lyne, Lancashire OL7 0AX
Telephone +44 (0)870 5 087 087 Facsimile: +44 (0)870 5 084 210
Registered No. 3848973 England Registered Office: As above

Revision: 0 - Aug/14

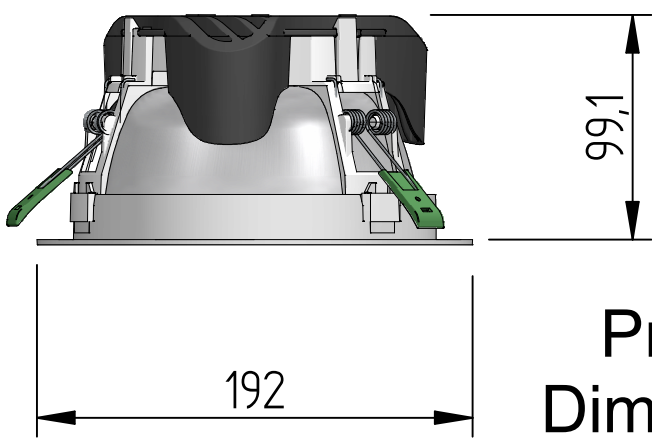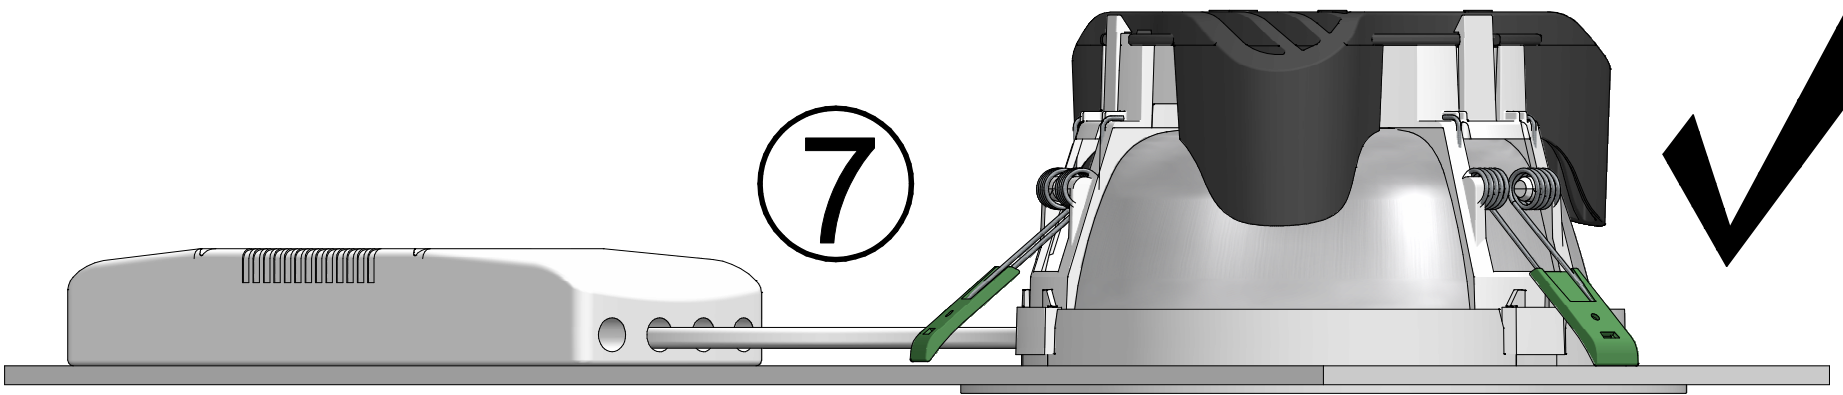


Product Dimensions

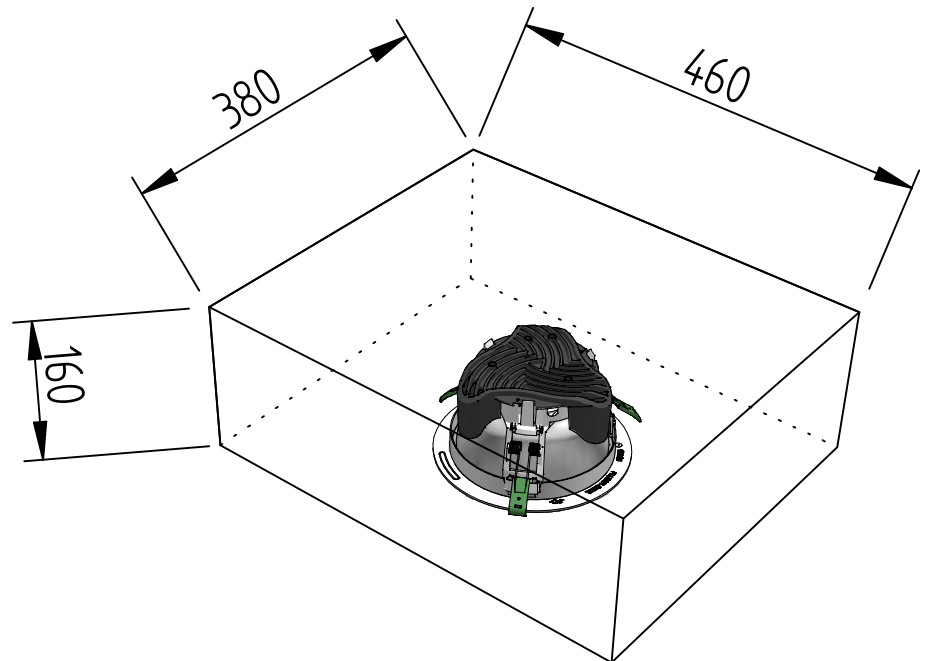


Minimum installation volume

Accessories

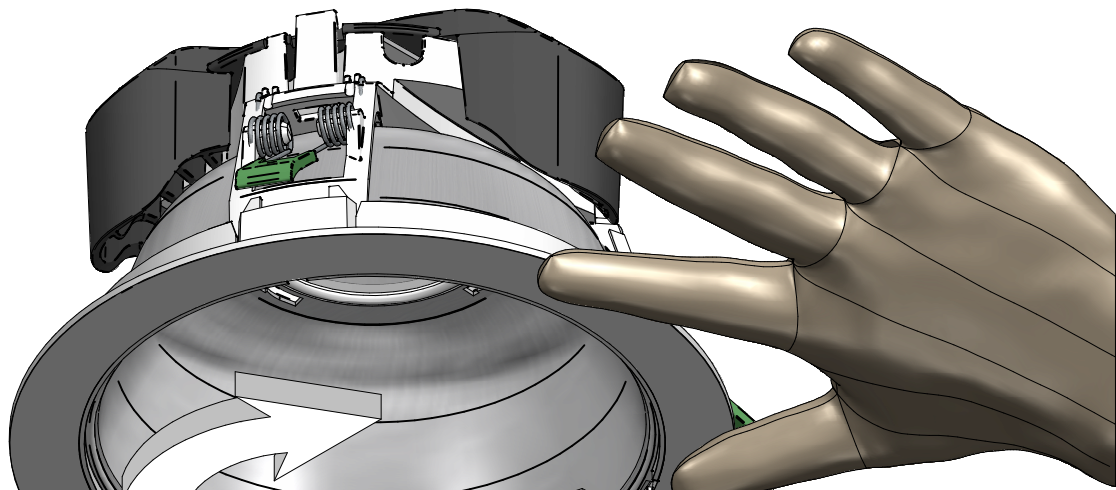

Support the bezel or reflector to prevent rotation during installation or removal of the attachments.

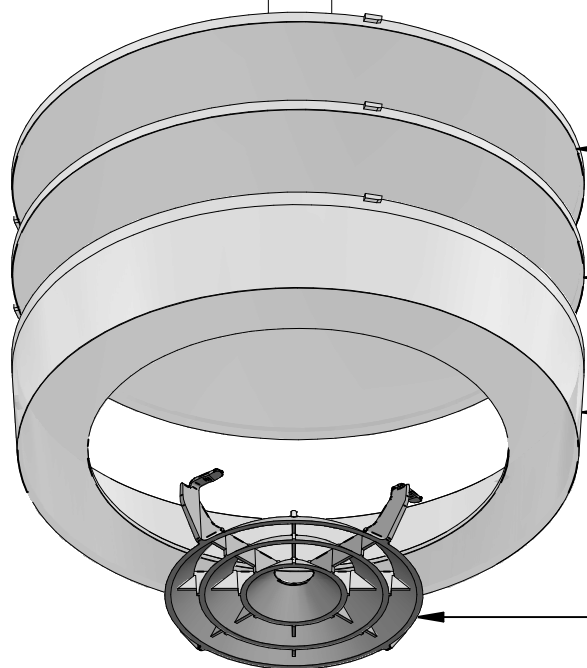


ESLA-IP44C
Flat IP44 Clear

ESLA-IP44
Flat IP44 Opal

ESLA-3
Floating opal ring



MLA-AGC
Anti-glare attachment

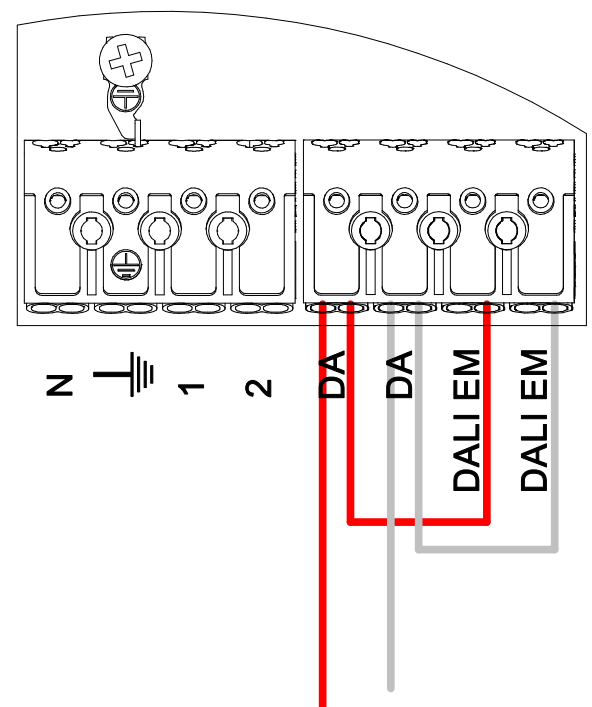



Bridge DALI terminals as shown if the driver and inverter share a single DALI pair. Use link wires supplied.

ESPRIT LED





Whitecroft Lighting Limited

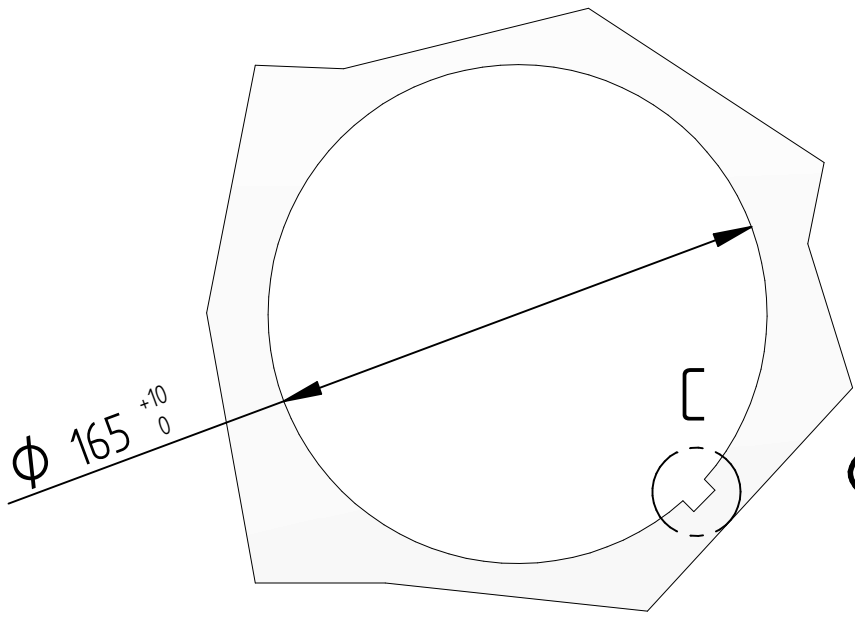

4

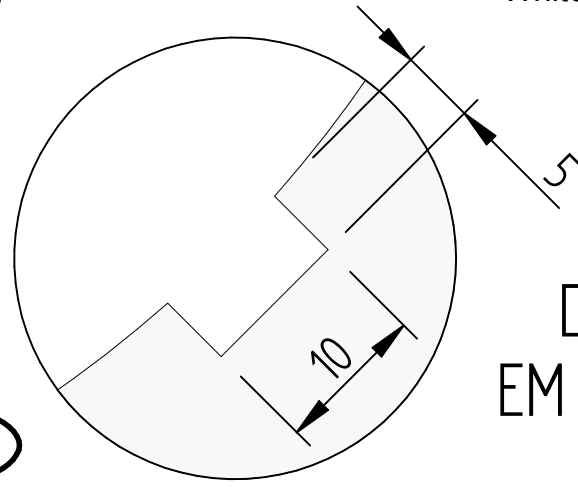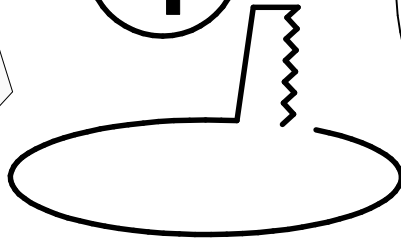


DETAIL C
EM LED notch

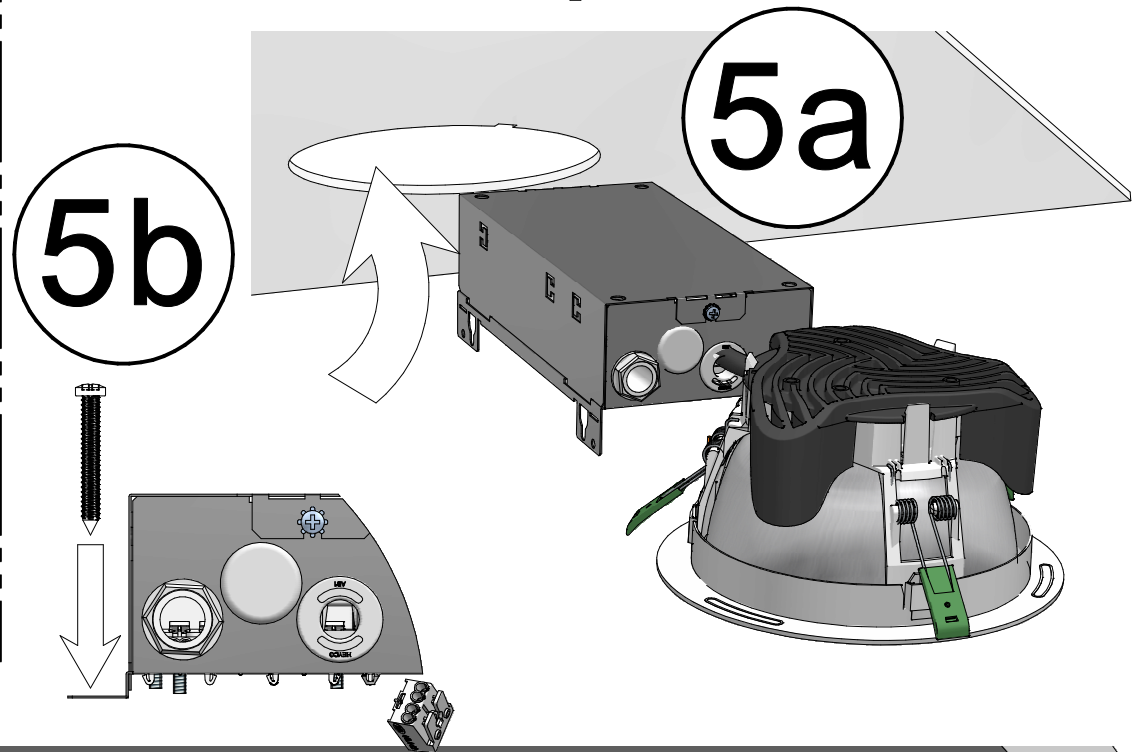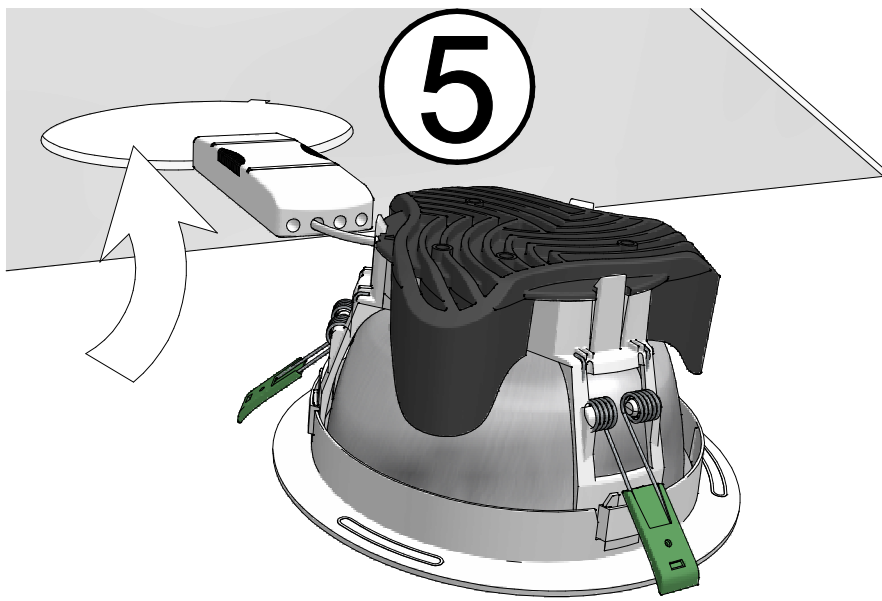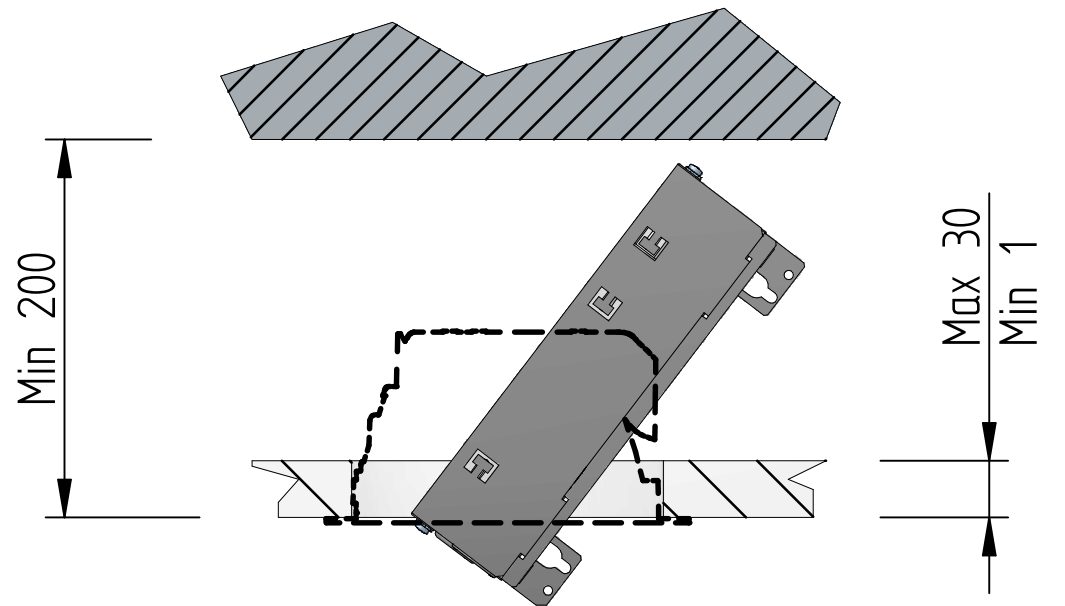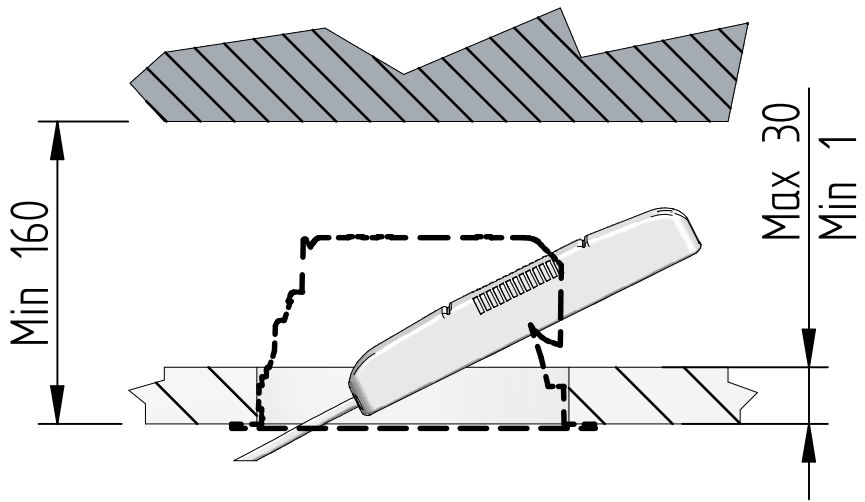

6a

x2

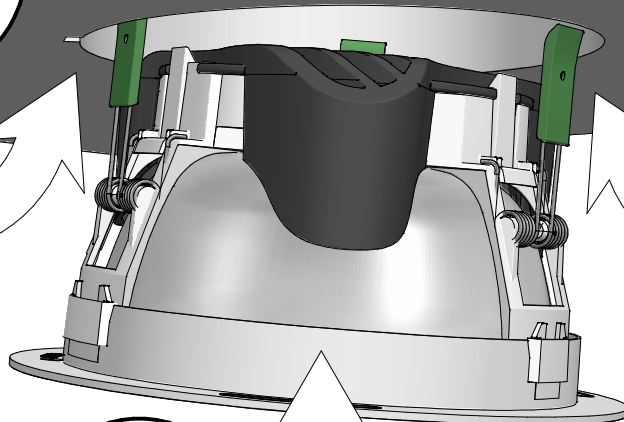


6b

x1




6c

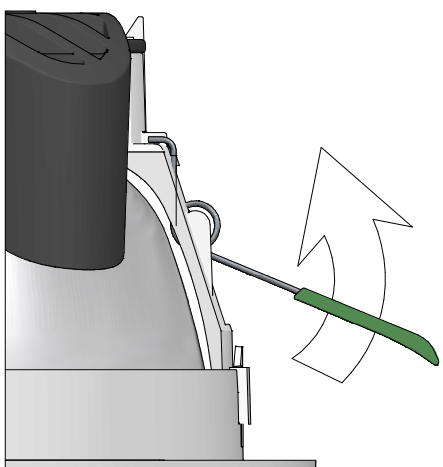


ESPRIT LED

Whitecroft Lighting Limited



Follow this side for:	3000°K		4000°K	
	1100lm	2000lm	1100lm	2000lm
Fixed output	•	•	•	•
DALI	•	•	•	•
Fixed output 3hr EM				
DALI 3hr EM				
Fixed output COMECS				
DALI COMECS				


Follow this side for:	3000°K		4000°K	
	1100lm	2000lm	1100lm	2000lm
Fixed output				
DALI				
Fixed output 3hr EM	•	•	•	•
DALI 3hr EM	•	•	•	•
Fixed output COMECS	•	•	•	•
DALI COMECS	•	•	•	•

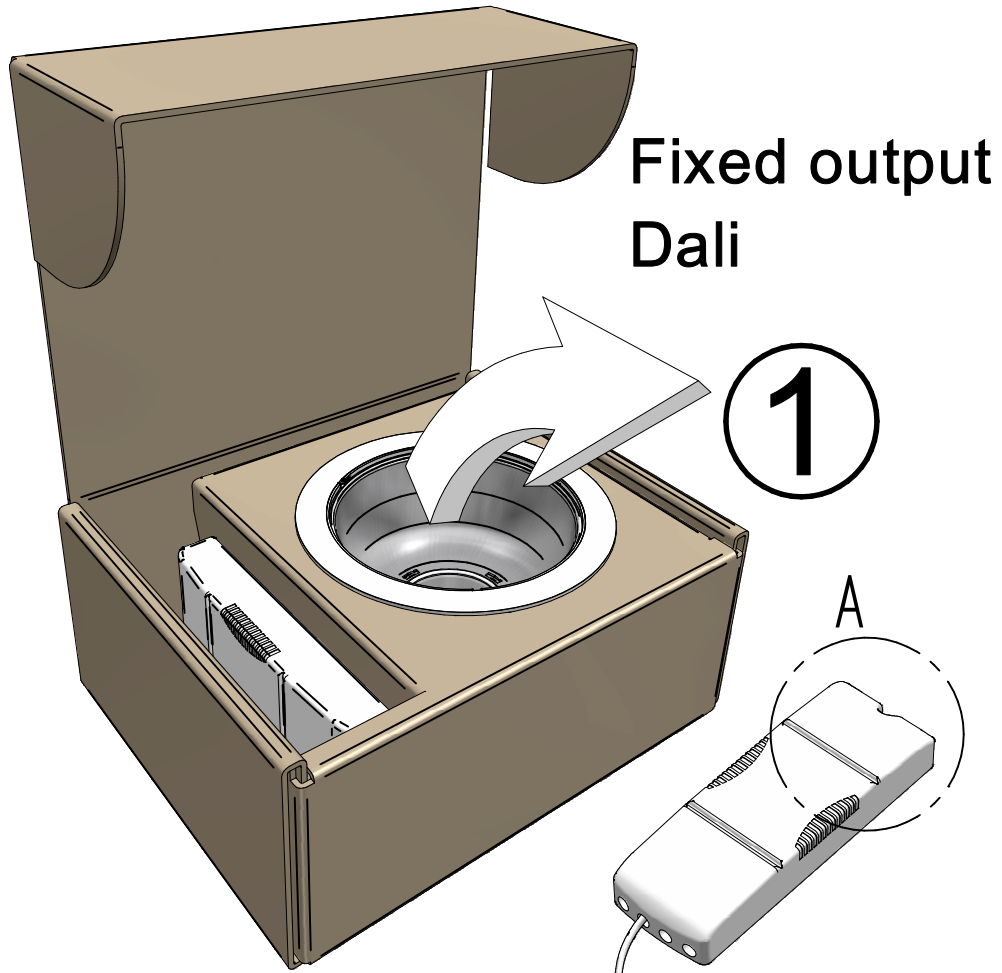

Fixed output
Dali

1


A

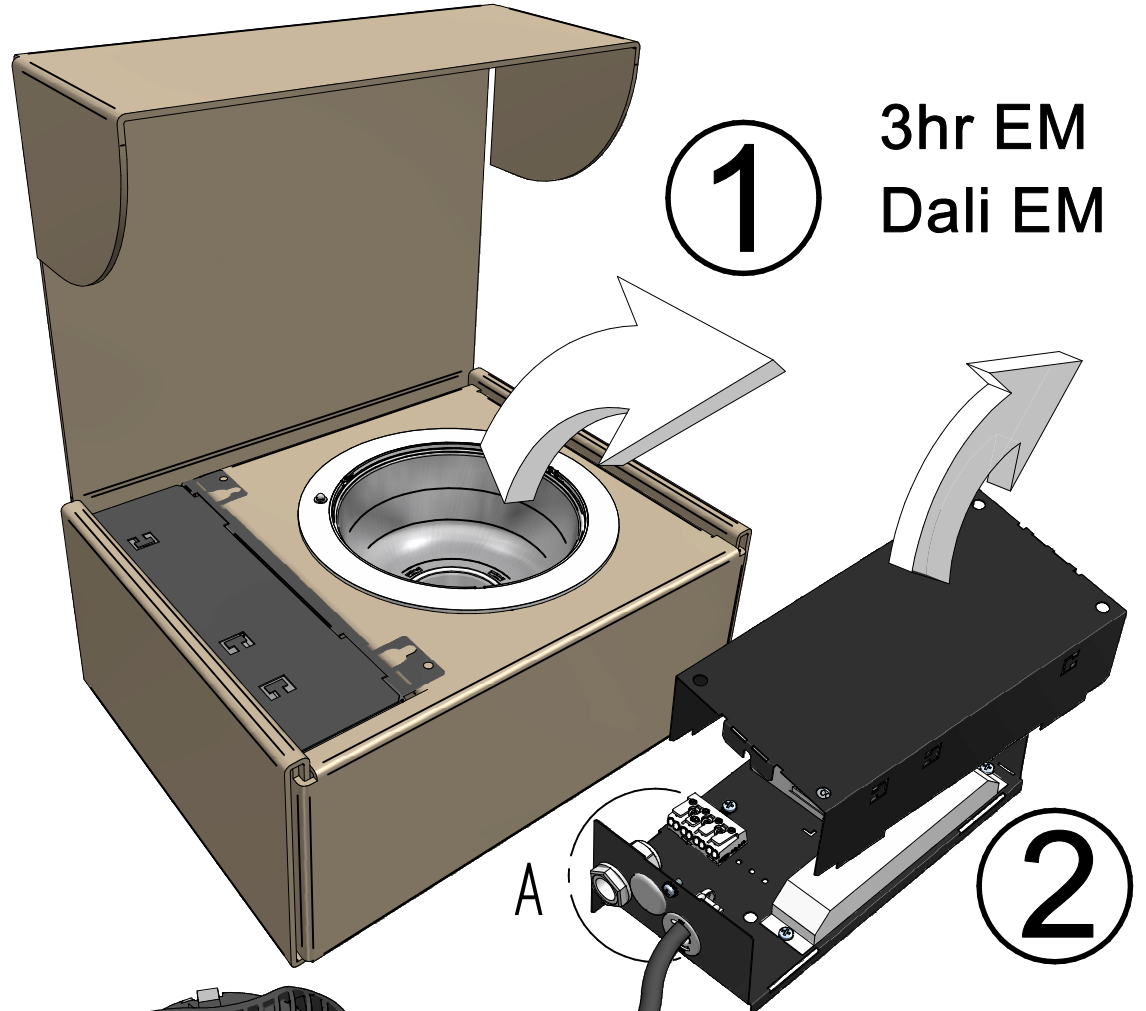

3hr EM
Dali EM



1

2

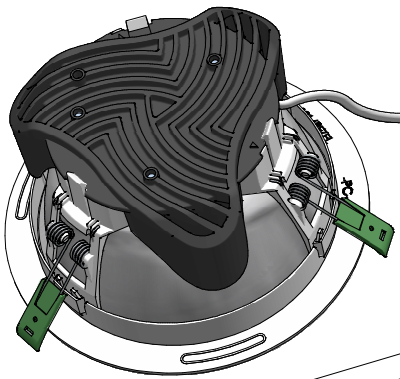


3

[Supply]

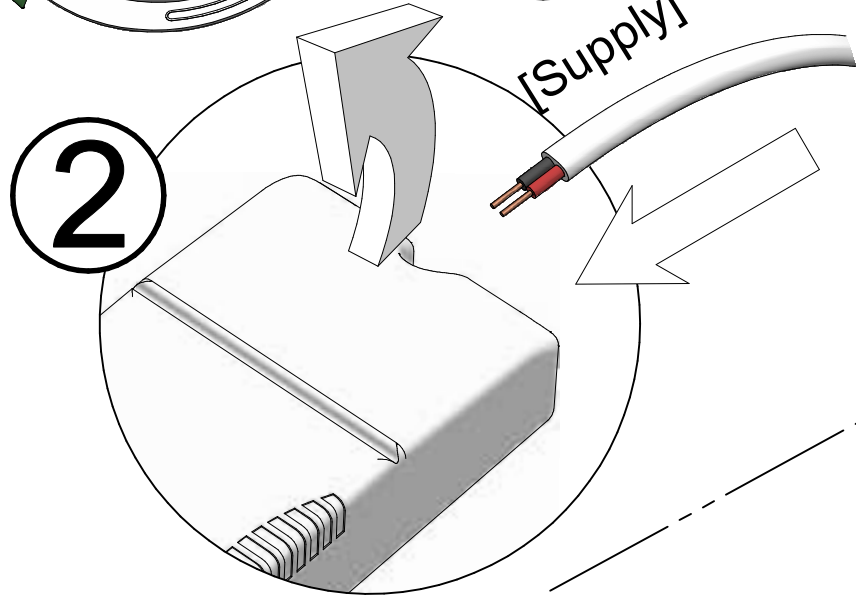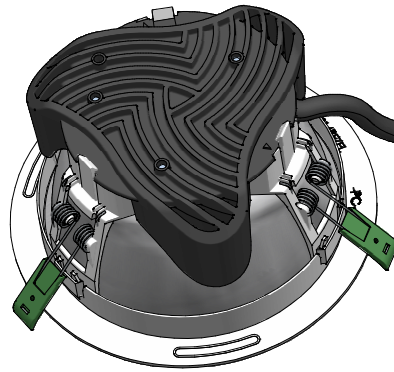


2

DETAIL A

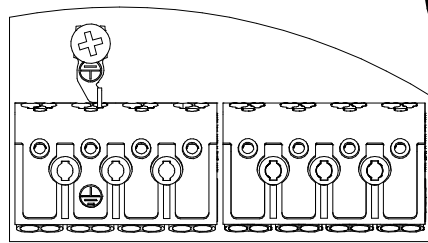


3 HR EM
3 HR EM with DALI Driver
DALI Driver & inverter (COMECS)
(See note on p.3)

3a

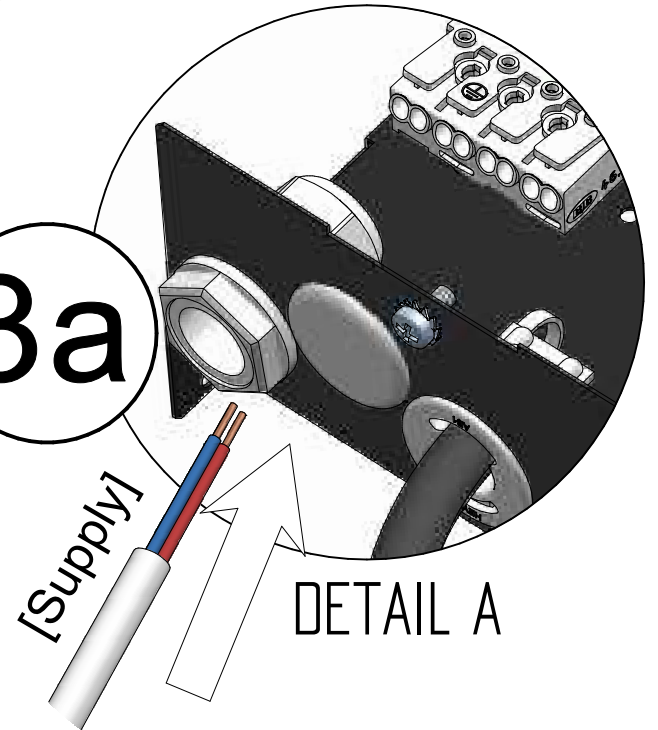

DETAIL A

3b

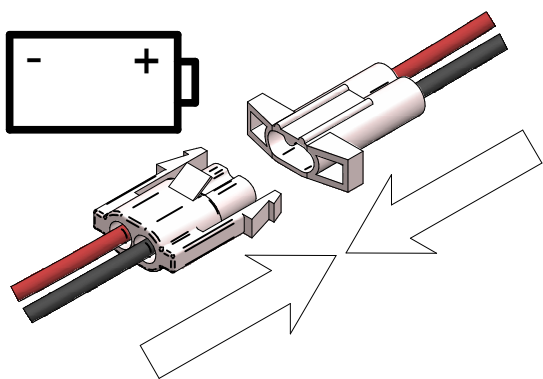

3c

