

Micro Spot 65

IP65 surface mounted spotlight for feature lighting

Whitecroft
lighting

IP65

LED



Ground Spike



Graphite Grey



Silver/grey

Optics

- 1250 lumens, 14W
- 3000K LED
- Ra90 colour rendition
- Medium beam distribution

Body

- IP65, IK08 protection rated
- Die cast aluminium body
- Polyester powder coated suitable for saline and corrosive environments
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- Graphite grey or silver/grey finish
- Tempered glass diffuser
- Adjustable aiming direction
- Surface mounting
- Optional mounting 'spike' for installation into soft ground
- Fitted cable gland
- Fixed output LED driver
- Graphite grey RAL 7024
- Silver/grey RAL 9006

Order codes

Graphite Grey

| | | | |
|-----------------|--------------|-------|-----|
| Graphite Grey | Fixed Output | LL/CW | L70 |
| 1250 lumen, 14W | MCLH13KG | 89 | 50k |

Accessories

| | |
|-----------------------|----------|
| GROUND MOUNTING SPIKE | MCLSPIKE |
|-----------------------|----------|


Options

| | | |
|----------------------|--------------------|--------------|
| 4000K LED ON REQUEST | Replace 3K with 4K | i.e MCLH14KG |
| SILVER/GREY | Replace G with S | i.e MCLH13KS |

LED Performance


| | | |
|-------------|----------|--------------------|
| Colour Temp | RA (CRI) | Colour consistency |
| 3000K | >90 | MacAdam 3 SDCM |

Dimensions

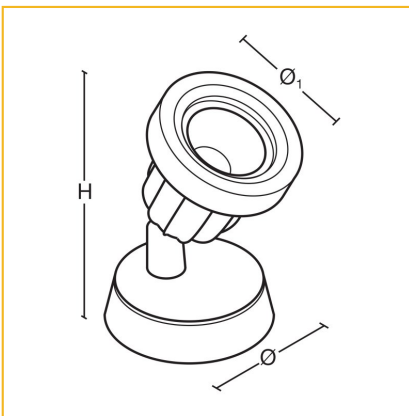

| | | | |
|-----|--------|-----|-----|
| H | KG(EM) | Ø | Ø1 |
| 194 | 0.8 | 127 | 114 |

Photometric Performance

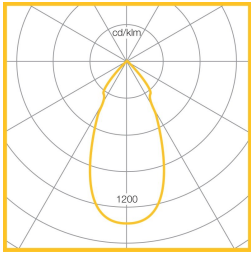

14W 3000K 1250
Lumens
LOR = 100.0%

To Specify

Surface mounted IP65 die cast aluminium LED spotlight with medium beam distribution. Finished in polyester powder coated graphite grey or silver/grey – as Whitecroft MICRO SPOT 65
