

Radial Cornice LED

Luminaire for corner mounting

Whitecroft
lighting

IP40

LED



Optics

- Output Options:
 - 2300 lumens (28W)
- Emergency Output (BLF):
 - All variants - 165 Lumens
- 4000K 'cool' white LEDs
- Internal reflector system for superior efficiency
- Reeded polycarbonate diffuser

Body

- IP40
- Extruded aluminium body finished white
- RAL Colour: White RAL9010.
- Aluminium profiled end caps
- Robust construction
- DALI as standard

Order codes


Radial

					B50	
Radial	DALI	3hr Emergency	L70	L80	L90	
2300 Lumens	RDLY14KW/SRF1	RDLY14KWEM/SRF1	>100K	>100K	95K	

LED Performance


Colour Temp	RA (CRI)	Colour consistency
4000K	>80	MacAdam 3 SDCM

Dimensions

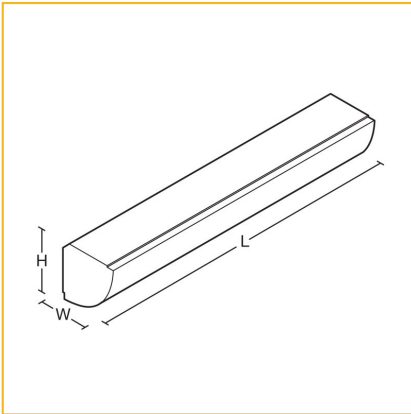


L	W	H	KG	KG(EM)
1196	93	93	4	4.5

Photometric Performance

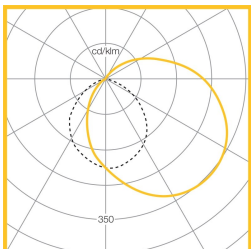

28W LED 2300
Lumens 4000K
LOR = 100.0%
SHR MAX = 1.76

Performance Guide



Lamps	4000K LED
Illuminance	134 lux
Spacing	0.0m x 3.0m
Maintenance	0.8
Reflectance	70/50/20
Ceiling Height	2.7m
Working plane	0.0m

To Specify

Cornice mounted IP40 rated LED luminaire with extruded aluminium body and reeded polycarbonate diffuser – as Whitecroft Lighting RADIAL CORNICE LED
