

Spectre Wall

IP65 wall mounted luminaire for outdoor applications

Whitecroft
lighting

IK08

IP65

LED



Optics

- Direct/indirect distribution
- 4000K and 3000K LED options
- Internal anodised aluminium reflector
- 4mm thick clear toughened glass visor

Body

- IP65, IK08 protection rated
- Die cast aluminium body
- Finished in silver/grey RAL 9007
- Primed and coated for resistance to corrosive and saline environments
- For outdoor applications within 3km of the coast, an enhanced paint finish can be offered on request
- Fixed output as standard, DALI optional
- Requires dedicated wall mounting bracket, to be ordered separately

Order codes

Direct/Indirect

4000K LED	Fixed Output	LL/CW	L70
2663 lumen, 45.6W LED	SWTLH24K	58	50k

Accessories

Essential wall bracket

SWBKT

Options

DALI dimming

Change 'H' to 'Y'

ie. SWTLY24K

3000K

Change 4K to 3K

i.e. SWTLH23K

This product uses 1 DALI driver

LED Performance

Colour Temp

RA (CRI)


Colour consistency

4000K

>90

MacAdam 3 SDCM


Dimensions

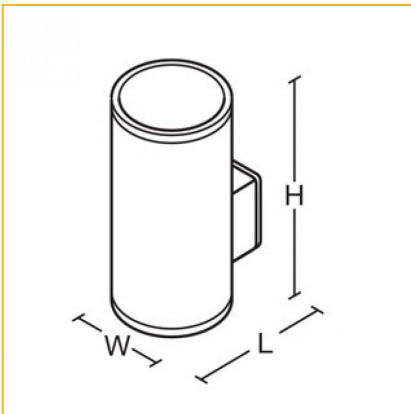

L	W	H	KG	FC (W)	FC (H)
280	185	350	6.9	72	210

Cable entry 95mm below centre of mounting bracket to hole centre, suitable for 9-12mm diameter cable

Photometric Performance



Direct/Indirect
LED 2663 Lumens
LOR = 100.0%

To Specify

Spectre Wall mounted IP65 direct only or direct/indirect luminaire. Die cast aluminium body with toughened glass visor. Primed and coated for resistance to corrosion and saline environments. Requires wall mounting bracket, supplied separately - as Whitecroft SPECTRE WALL
