



Pictured with optional opal diffuser



/WG: Wire guard





/HMS: On/Off sensor (up to 13m)



Rear access for easy installation



Hinged diffuser

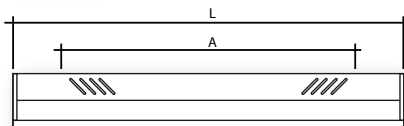

- High strength powder coated steel construction.
- IP40 from below and IP20 from above.
- Branded drivers for ultimate durability.
- Available with opal or clear diffuser – supplied separately.
- Available with **EyeWi** wireless controls.

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	A* (mm)	Weight (kg)
SLW100	90	11141	124	673	313	92	636	6.5
SLW120	120	14800	123	673	313	92	636	6.5
SLW150	150	18908	126	820	348	92	776	6.7
SLW180	180	22400	124	820	348	92	776	7.3
SLW210	210	26630	127	820	348	92	776	7.3

Optional Features (add suffix to order code)

- /M3: 3hr remote emergency
- /LSLV: Dali dimming
- /HMS: On/Off integral microwave sensor (up to 13m)
- /OPLENS2: Opal lens cover for reduced glare (100w & 120w version)
- /OPLENS3: Opal lens cover for reduced glare (150w & 180w & 210w versions)
- /CLENSS2: Clear lens cover (100w & 120w version)
- /CLENSS3: Clear lens cover (150w & 180w & 210w versions)
- WG100/120: Wire guard (100w & 120w version)
- WG150/180/210: Wire guard (150w & 180w & 210w versions)

* These dimensions are used for the slots