


Architectural curved profile



Standalone emergency LED array

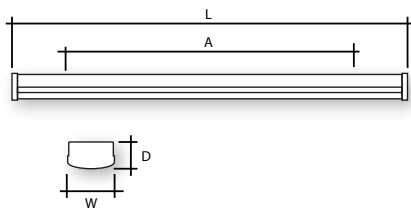

- Steel powder coated body with extruded opal polycarbonate diffuser.
- IP40 from below and IP20 from above.
- Suitable for surface mounting or suspension.
- 2 point Y suspension kit available.
- Available with microwave sensor for On/Off switching.
- Available with **EyeWi** wireless controls.

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	A* (mm)	Weight (kg)
SSL305B	30	2970	96	1484	180	103	1366	4.2
SSL605B	60	5940	94	1484	180	103	1366	4.4
SSL406B	40	3960	96	1784	180	103	1666	4.5
SSL806B	80	7920	94	1784	180	103	1666	4.7

Optional Features (add suffix to order code)

- /M3: 3hr integral emergency
- /HMS: On/Off integral microwave sensor
- /LSLV: Dali driver
- ECOLE/SUSP/3M: 3m wire suspension kit

* These dimensions are used for the suspension kits