

- LOW ENERGY**  

- 5200K COOL WHITE**  

- 3 YEAR\* WARRANTY**  

- IP65**  

- IK08**  

- CRI >80**  

- OP. TEMP -20°C to +40°C**  

- VOLTAGE AC220 - 240V**  




150w




10w PIR



20w Non PIR

FLOODLIGHTING / STREET LIGHTING

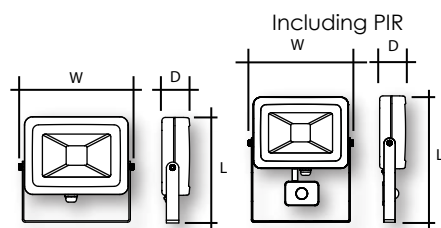

- Die cast aluminium construction.
- Ultra slim design.
- Adjustable PIR.
- PIR available in 10, 20, 30 and 50w.
- Stirrup mounted.

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	L inc PIR (mm)	W (mm)	D (mm)	Weight (kg)
SFLED10W/5K	10	832	84	117	172	135	37	0.5
SFLED20W/5K	20	1710	82	153	207	170	40	0.8
SFLED30W/5K	30	2844	90	207	250	235	49	1.4
SFLED50W/5K	50	4577	87	247	281	281	55	2.2
SFLED100W/5K	100	8753	92	406	-	330	65	3.0
SFLED150W/5K	150	12776	82	408	-	440	75	5.0
SFLED200W/5K	200	16276	85	408	-	440	75	5.0

**Optional Features** (add suffix to order code)

/PIR: Passive infrared sensor available in 10, 20, 30 and 50w

A range of installation columns and brackets are available as per page 47.

Please contact our sales team for further information.