

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



PUMP COMPANY

Zoeller Family of Water Solutions™

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

SECTION: 2.20.027

FM1779

0114

Supersedes

1109

visit our web site:
www.zoeller.com

COMPARE THESE FEATURES

- 115V single phase/60 Hz, 1/2 HP, 5.0 Amps, 3400 RPM.
- Thermal overload protection.
- Non-corrosive engineered plastic motor housing, pump housing and base.
- No steel sheet metal parts to rust or corrode.
- All stainless steel screws, switch arm, and lower motor housing.
- Oil-free.
- 2-pole float operated mechanical switch.
- Solid buoyant polypropylene float.
- Engineered plastic impeller.
- Non-clogging vortex impeller.
- UL Listed 9' cord standard with 3-prong plug. Optional 25' cord available.
- Maximum temperature for dewatering - 110°F. (43°C.)
- Passes 3/8" spherical solids.
- 1½" NPT discharge.
- On point— 8-1/2" • Off point— 3-5/8"
- Major width - 9-1/16" • Height - 12-5/8"

**ALL MODELS ARE
COMPLETELY SUBMERSIBLE
HERMETICALLY SEALED**

Watertight - dust tight.



C US
Tested to UL Standard UL778 &
Certified to CSA Standard
C22.2 No. 108

Model 76 (For Pump Prefix Identification see News & Views 0052)

"AQUA-MATE"

SUBMERSIBLE PUMP FOR DEWATERING (SUMP)

PASSES 3/8" SPHERICAL SOLIDS
1½" NPT DISCHARGE




AUTOMATIC
MODEL



MODELS AVAILABLE

- Automatic or Nonautomatic



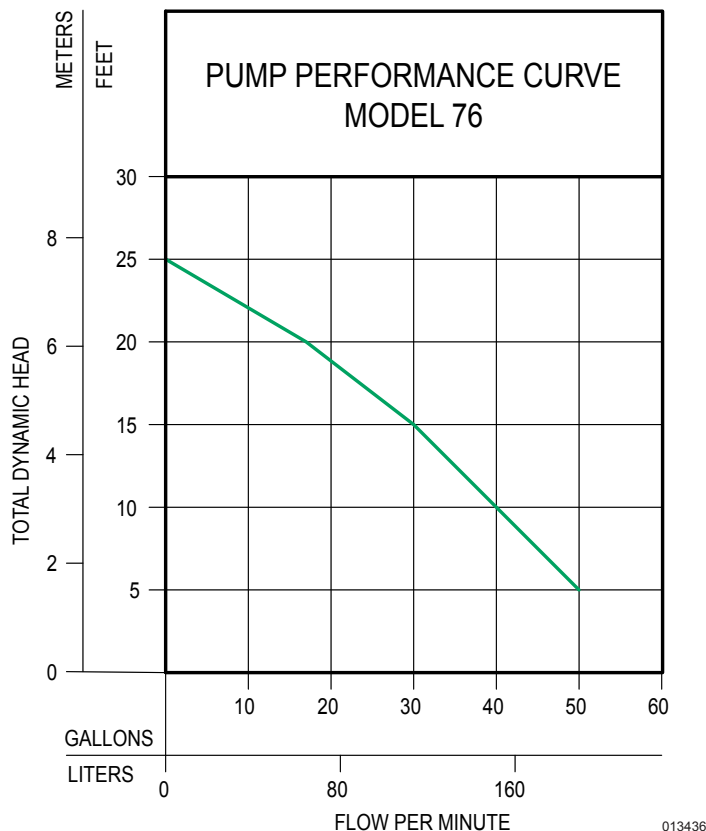

CONSULT FACTORY FOR SPECIAL APPLICATIONS

- Variable level Float Switches available.
- Variable level long cycle systems available.
- Alarm systems available.
- Duplex systems available.

Single Seal	Control Selection					
	Model	Volts	Phase	Mode	Amps	Simplex Duplex
	M76	115	1	Auto	5.0	1 3
	N76	115	1	NonAuto	5.0	2 2 & 3

SELECTION GUIDE

1. Integral float-operated mechanical switch, no external control required.
2. For automatic use single piggyback variable level float switch or double piggyback variable level float switch. Refer to FM0477.
3. See FM1663 for a residential alternator system.



For information on additional Zoeller products refer to catalog on Piggyback Variable Level Float Switches, FM0477; Electrical Alternator, FM0486; Mechanical Alternator, FM0495; Sump/Sewage Basins, FM0487; and Single Phase Simplex Pump Control/Alarm Systems, FM0732.

CAUTION

All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electric Code (NEC) and the Occupational Safety and Health Act (OSHA).

TOTAL DYNAMIC HEAD/FLOW PER MINUTE DEWATERING ONLY

MODEL		76	
Feet	Meters	Gal.	Liters
5	1.5	50	189
10	3.0	40	151
15	4.6	30	114
20	6.1	17	64
Shut-off Head:		25 ft. (7.6 m)	

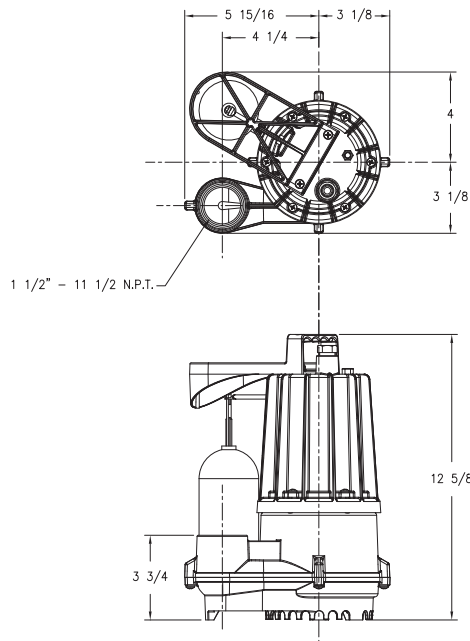

"Easy assembly"
(pump & discharge pipe
not included.)

OPTIONAL PUMP STAND P/N 10-2421

- Reduces potential clogging by debris.
- Replaces rocks or bricks under the pump.
- Made of durable, noncorrosive ABS.
- Raises pump 2" off bottom of basin.
- Provides the ability to raise intake by adding sections of 1½" or 2" PVC piping.
- Attaches securely to pump.
- Accommodates sump, dewatering and effluent applications.

NOTE: Make sure float is free from obstruction.

RESERVE POWERED DESIGN

For unusual conditions a reserve safety factor is engineered into the design of every Zoeller pump.