


## ENGINEPLUS-DR-DIM - Constant Current Dimmable Driver

### Description

10W constant current 175-195mA driver, suitable for Orlight engines.



### Standards

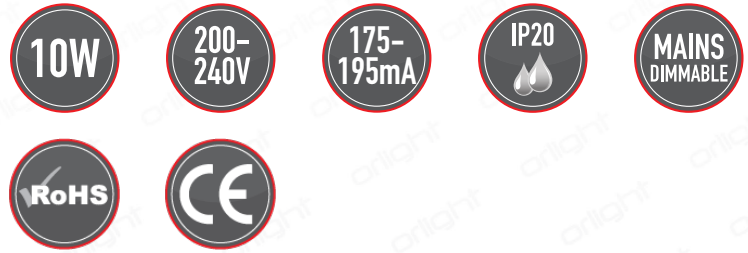

### Dimensions



### Specifications

Output	Dimming Options	Mains
	Type	Constant Current
	Power	10W Max
	Voltage	36V DC
	Current	175-195mA
	Voltage Tolerance	±5.0%
Input	Voltage Range	200-240VAC
	Frequency Range	50/60Hz
	Power Factor (Typ.)	PF>0.7/230VAC at full load
	Efficiency (Typ.)	85%
Protection	Short Circuit	Recovers automatically after fault condition is removed
	Over Load	Above 105% rated output power

Product Coding: Example: ENGINEPLUS-DR-DIM

CODE

ENGINEPLUS-DR-DIM