



Contour

A versatile luminaire range for performance lighting in a highly modular design

- Sleek, modern design with high quality matt finish and colour options to enhance the surrounding space
- Minimal energy consumption T16 (>75Llm/W) lamps with integrated control options
- Modular design can be surface mounted or suspended, individually or in flexible continuous systems
- Comprehensive range of optics and distributions to suit any project specification. Direct/Indirect versions offer minimum 30% upward light.



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

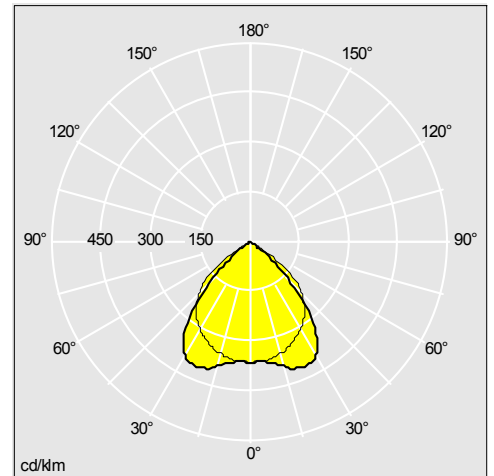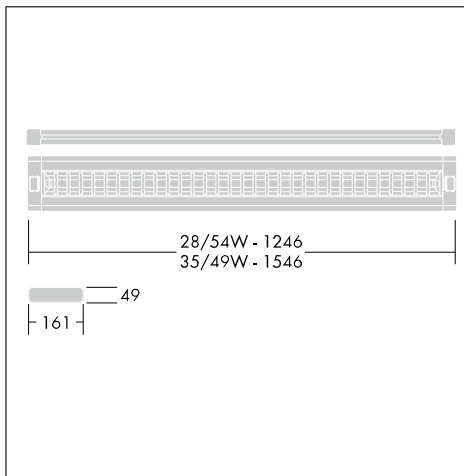

96551113

Material/Finish

Body: extruded aluminium in anodised silver finish with grey painted trim (RAL 9007); or painted matt white (RAL 9003) with contrasting white trim (RAL 000 85 00) or grey trim (RAL 9007).

Backplate: sheet steel painted white

Endcap: moulded polycarbonate painted white (RAL 000 85 00) or grey (RAL 9007)

Louvre optic: anodised aluminium.

Installation/Mounting

Surface (D): Luminaire fixes to ceiling via keyhole slots at 700mm (1200mm version) or 1000mm (1500mm version) centres. Can also be suspended for direct illumination via optional suspension kit 96551444. Electrical connection via 20.5mm holes at end into piano key terminal blocks. Asymmetric version can also be wall mounted with bracket kit 96551442 (white) or 96551443 (grey). Suspended (DI): Luminaire is self-balancing and suspended via 2 adjustable 1.5m long quick lock single suspension wires (supplied) at 1115mm (1200mm version) and 1415mm (1500mm version) fixing centres. Electrical connection via pre-fitted 2.6m LSOH white or grey mains cable. All versions are suitable for mounting end to end in continuous rows or in flexible systems using appropriate length infills or 90 degree, T shape or cross shape connector modules with corresponding connecting kit for mechanical connection and through wiring kit (all sold separately).

Specification

To specify state:

Slim T16 surface direct or suspended self-balancing direct/indirect luminaire with minimum 30% upward LOR, in white, grey or white and grey with double parabolic performance louvre optic, mounted individually or in continuous systems, with dimmable and emergency versions.

As Thorn Contour.

Contour

Ordering Guide Supplied complete with light source.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Contour Direct, LED, diffuser, dimmable, white				
CONTO D 2850 HFI-X MPT WH L840	LED		5,6	96551449
CONTO D 4200 HFI-X MPT WH L840	LED		5,6	96551450
CONTO D 2750 HFI-X MPT WH L830	LED		5,6	96642599
CONTO D 4050 HFI-X MPT WH L830	LED		5,6	96642600
Contour Direct, LED, diffuser, dimmable, grey				
CONTO D 2850 HFI-X MPT GY L840	LED		5,6	96551467
CONTO D 4200 HFI-X MPT GY L840	LED		5,6	96551468
CONTO D 2750 HFI-X MPT GY L830	LED		5,6	96642601
CONTO D 4050 HFI-X MPT GY L830	LED		5,6	96642602
Contour Direct, LED, diffuser, dimmable, emergency, white				
CONTO D 2850 HFI-X E3 MPT WH L840	LED		5,8	96551453
CONTO D 4200 HFI-X E3 MPT WH L840	LED		5,8	96551454
Contour Direct, LED, diffuser, dimmable, emergency, grey				
CONTO D 4200 HFI-X E3 MPT GY L840	LED		5,8	96551472
CONTO D 2850 HFI-X E3 MPT GY L840	LED		5,8	96551471
Contour Direct, louvre, white				
CONTO D 1x28W HF DSB WH L840	FDH	G5	3,8	96551230
CONTO D 1x35W HF DSB WH L840	FDH	G5	4,7	96551231
CONTO D 1x49W HF DSB WH L840	FDH	G5	4,7	96551232
CONTO D 1x54W HF DSB WH L840	FDH	G5	3,8	96551233
CONTO D 2x28W HF DSB WH L840	FDH	G5	4,9	96551246
CONTO D 2x35W HF DSB WH L840	FDH	G5	5,9	96551247
CONTO D 2x49W HF DSB WH L840	FDH	G5	5,9	96551248
CONTO D 2x54W HF DSB WH L840	FDH	G5	4,9	96551249
Contour Direct, louvre, grey				
CONTO D 1x28W HF DSB GY L840	FDH	G5	3,8	96551274
CONTO D 1x35W HF DSB GY L840	FDH	G5	4,7	96551275
CONTO D 1x49W HF DSB GY L840	FDH	G5	4,7	96551276
CONTO D 1x54W HF DSB GY L840	FDH	G5	3,8	96551277
CONTO D 2x28W HF DSB GY L840	FDH	G5	5,9	96551281
CONTO D 2x35W HF DSB GY L840	FDH	G5	5,9	96551282
CONTO D 2x49W HF DSB GY L840	FDH	G5	5,9	96551283
CONTO D 2x54W HF DSB GY L840	FDH	G5	4,9	96551284
Contour Direct, louvre, dimmable, white				
CONTO D 2x28W HFI DSB WH L840	FDH	G5	4,9	96551253
CONTO D 2x35W HFI DSB WH L840	FDH	G5	5,9	96551254
CONTO D 2x49W HFI DSB WH L840	FDH	G5	5,9	96551255
CONTO D 2x54W HFI DSB WH L840	FDH	G5	4,9	96551256
Contour Direct, louvre, dimmable, grey				
CONTO D 2x28W HFI DSB GY L840	FDH	G5	4,9	96551288

Contour

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
CONTO D 2x35W HFI DSB GY L840	FDH	G5	5,9	96551289
CONTO D 2x49W HFI DSB GY L840	FDH	G5	5,9	96551290
CONTO D 2x54W HFI DSB GY L840	FDH	G5	4,9	96551291
Contour Direct, louvre, emergency, white				
CONTO D 1x28W HF E3 DSB WH L840	FDH	G5	4	96551239
CONTO D 1x35W HF E3 DSB WH L840	FDH	G5	4,9	96551240
CONTO D 1x49W HF E3 DSB WH L840	FDH	G5	4,9	96551241
CONTO D 1x54W HF E3 DSB WH L840	FDH	G5	4	96551242
CONTO D 2x28W HF E3 DSB WH L840	FDH	G5	5,1	96551260
CONTO D 2x35W HF E3 DSB WH L840	FDH	G5	6,2	96551261
CONTO D 2x49W HF E3 DSB WH L840	FDH	G5	6,2	96551262
CONTO D 2x54W HF E3 DSB WH L840	FDH	G5	5,1	96551263
Contour Direct, louvre, emergency, grey				
CONTO D 2x28W HF E3 DSB GY L840	FDH	G5	5,1	96551295
CONTO D 2x35W HF E3 DSB GY L840	FDH	G5	6,2	96551296
CONTO D 2x49W HF E3 DSB GY L840	FDH	G5	6,2	96551297
CONTO D 2x54W HF E3 DSB GY L840	FDH	G5	5,1	96551298
Contour Direct, louvre, dimmable, emergency, white				
CONTO D 2x28W HFI E3 DSB WH L840	FDH	G5	5,1	96551267
CONTO D 2x35W HFI E3 DSB WH L840	FDH	G5	6,2	96551268
CONTO D 2x49W HFI E3 DSB WH L840	FDH	G5	6,2	96551269
CONTO D 2x54W HFI E3 DSB WH L840	FDH	G5	5,1	96551270
Contour Direct, louvre, dimmable, emergency, grey				
CONTO D 2x28W HFI E3 DSB GY L840	FDH	G5	5,1	96551302
CONTO D 2x35W HFI E3 DSB GY L840	FDH	G5	6,2	96551303
CONTO D 2x49W HFI E3 DSB GY L840	FDH	G5	6,2	96551304
CONTO D 2x54W HFI E3 DSB GY L840	FDH	G5	5,1	96551305
Contour Direct, asymmetric, white				
CONTO D 1x28W HF RAS WH L840	FDH	G5	4,9	96551237
CONTO D 1x35W HF RAS WH L840	FDH	G5	5,9	96551238
Contour DI, LED, diffuser, dimmable, white				
CONTO DI 3900 HFI-X MPT WH ML6 L840	LED		5,6	96551457
CONTO DI 4700 HFI-X MPT WH ML6 L840	LED		5,6	96551458
Contour DI, LED, diffuser, dimmable, grey				
CONTO DI 3900 HFI-X MPT GY ML6 L840	LED		5,6	96551483
CONTO DI 4700 HFI-X MPT GY ML6 L840	LED		5,6	96551484
Contour DI, LED, diffuser, dimmable, emergency, white				
CONTO DI 3900 HFI-X E3 MPT WH ML6 L840	LED		5,8	96551463
CONTO DI 4700 HFI-X E3 MPT WH ML6 L840	LED		5,8	96551464
Contour DI, LED, diffuser, dimmable, emergency, grey				

Contour

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
CONTO DI 3900 HFI-X E3 MPT GY ML6 L840	LED		5,8	96551487
CONTO DI 4700 HFI-X E3 MPT GY ML6 L840	LED		5,8	96551488
Contour DI, louvre, white				
CONTO DI 1x28W HF DSB WH ML4 L840	FDH	G5	3,6	96551309
CONTO DI 1x35W HF DSB WH ML4 L840	FDH	G5	4,4	96551310
CONTO DI 1x49W HF DSB WH ML4 L840	FDH	G5	4,4	96551311
CONTO DI 1x54W HF DSB WH ML4 L840	FDH	G5	3,6	96551312
CONTO DI 2x28W HF DSB WH ML4 L840	FDH	G5	4,3	96551323
CONTO DI 2x35W HF DSB WH ML4 L840	FDH	G5	5,1	96551324
CONTO DI 2x49W HF DSB WH ML4 L840	FDH	G5	5,1	96551325
CONTO DI 2x54W HF DSB WH ML4 L840	FDH	G5	4,3	96551326
Contour DI, louvre, grey				
CONTO DI 1x28W HF DSB GY ML4 L840	FDH	G5	3,6	96551350
CONTO DI 1x35W HF DSB GY ML4 L840	FDH	G5	4,4	96551351
CONTO DI 1x49W HF DSB GY ML4 L840	FDH	G5	4,4	96551352
CONTO DI 1x54W HF DSB GY ML4 L840	FDH	G5	3,6	96551353
CONTO DI 2x28W HF DSB GY ML4 L840	FDH	G5	4,3	96551357
CONTO DI 2x35W HF DSB GY ML4 L840	FDH	G5	5,1	96551358
CONTO DI 2x49W HF DSB GY ML4 L840	FDH	G5	5,1	96551359
CONTO DI 2x54W HF DSB GY ML4 L840	FDH	G5	4,3	96551360
Contour DI, louvre, white/grey				
CONTO DI 1x28W HF DSB WH GY ML4 L840	FDH	G5	3,6	96551371
CONTO DI 1x35W HF DSB WH GY ML4 L840	FDH	G5	4,4	96551372
CONTO DI 1x49W HF DSB WH GY ML4 L840	FDH	G5	4,4	96551373
CONTO DI 1x54W HF DSB WH GY ML4 L840	FDH	G5	3,6	96551374
CONTO DI 2x28W HF DSB WH GY ML4 L840	FDH	G5	5,1	96551378
CONTO DI 2x35W HF DSB WH GY ML4 L840	FDH	G5	5,1	96551379
CONTO DI 2x49W HF DSB WH GY ML4 L840	FDH	G5	5,1	96551380
CONTO DI 2x54W HF DSB WH GY ML4 L840	FDH	G5	4,3	96551381
Contour DI, louvre, dimmable, white				
CONTO DI 2x28W HFI DSB WH ML6 L840	FDH	G5	4,3	96551330
CONTO DI 2x35W HFI DSB WH ML6 L840	FDH	G5	5,1	96551331
CONTO DI 2x49W HFI DSB WH ML6 L840	FDH	G5	5,1	96551332
CONTO DI 2x54W HFI DSB WH ML6 L840	FDH	G5	4,3	96551333
Contour DI, louvre, emergency, white				
CONTO DI 2x28W HF E3 DSB WH ML4 L840	FDH	G5	4,5	96241720
CONTO DI 1x28W HF E3 DSB WH ML4 L840	FDH	G5	3,8	96551316
CONTO DI 1x35W HF E3 DSB WH ML4 L840	FDH	G5	4,6	96551317
CONTO DI 1x49W HF E3 DSB WH ML4 L840	FDH	G5	4,6	96551318
CONTO DI 1x54W HF E3 DSB WH ML4 L840	FDH	G5	3,8	96551319
CONTO DI 2x35W HF E3 DSB WH ML4 L840	FDH	G5	5,3	96551337
CONTO DI 2x49W HF E3 DSB WH ML4 L840	FDH	G5	5,3	96551338
CONTO DI 2x54W HF E3 DSB WH ML4 L840	FDH	G5	4,5	96551339
Contour DI, louvre, emergency, grey				

Contour

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
CONTO DI 2x28W HF E3 DSB GY ML4 L840	FDH	G5	4,5	96551364
CONTO DI 2x35W HF E3 DSB GY ML4 L840	FDH	G5	5,3	96551365
CONTO DI 2x49W HF E3 DSB GY ML4 L840	FDH	G5	5,3	96551366
CONTO DI 2x54W HF E3 DSB GY ML4 L840	FDH	G5	4,5	96551367
Contour DI, louvre, emergency, white/grey				
CONTO DI 2x28W HF E3 DSB WH GY ML4 L840	FDH	G5	4,5	96551385
CONTO DI 2x35W HF E3 DSB WH GY ML4 L840	FDH	G5	5,3	96551386
CONTO DI 2x49W HF E3 DSB WH GY ML4 L840	FDH	G5	5,3	96551387
CONTO DI 2x54W HF E3 DSB WH GY ML4 L840	FDH	G5	4,5	96551388
Contour DI, louvre, dimmable, emergency, white				
CONTO DI 2x28W HFI E3 DSB WH ML6 L840	FDH	G5	4,5	96551343
CONTO DI 2x35W HFI E3 DSB WH ML6 L840	FDH	G5	5,3	96551344
CONTO DI 2x49W HFI E3 DSB WH ML6 L840	FDH	G5	5,3	96551345
CONTO DI 2x54W HFI E3 DSB WH ML6 L840	FDH	G5	4,5	96551346
Contour Accessories, white				
CONTO 90 DEGREE CORNER 161mm WH			0	96551392
CONTO 90 DEGREE CORNER 236mm WH			0	96551393
CONTO T SHAPE 161mm WH			0	96551398
CONTO T SHAPE 236mm WH			0	96551399
CONTO CROSS SHAPE 161mm WH			0	96551404
CONTO CROSS SHAPE 236mm WH			0	96551405
CONTO INFILL 600mm x 161mm WH			0	96551416
CONTO INFILL 600mm x 236mm WH			0	96551417
CONTO INFILL 900mm x 161mm WH			0	96551422
CONTO INFILL 900mm x 236mm WH			0	96551423
CONTO INFILL 1200mm x 161mm WH			0	96551428
CONTO INFILL 1200mm x 236mm WH			0	96551429
CONTO D RAS BRA MWA WH			0	96551442
Contour Accessories, grey				
CONTO 90 DEGREE CORNER 161mm GY			0	96551394
CONTO 90 DEGREE CORNER 236mm GY			0	96551395
CONTO T SHAPE 161mm GY			0	96551400
CONTO T SHAPE 236mm GY			0	96551401
CONTO CROSS SHAPE 161mm GY			0	96551406
CONTO CROSS SHAPE 236mm GY			0	96551407
CONTO INFILL 600mm x 161mm GY			0	96551418
CONTO INFILL 600mm x 236mm GY			0	96551419
CONTO INFILL 900mm x 161mm GY			0	96551424
CONTO INFILL 900mm x 236mm GY			0	96551425
CONTO INFILL 1200mm x 161mm GY			0	96551430
CONTO INFILL 1200mm x 236mm GY			0	96551431
CONTO D RAS BRA MWA GY			0	96551443
Contour Accessories, white/grey				
CONTO 90 DEGREE CORNER 161mm WH GY			0	96551396
CONTO 90 DEGREE CORNER 236mm WH GY			0	96551397

Contour

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
CONTO T SHAPE 161mm WH GY			0	96551402
CONTO T SHAPE 236mm WH GY			0	96551403
CONTO CROSS SHAPE 161mm WH GY			0	96551408
CONTO CROSS SHAPE 236mm WH GY			0	96551409
CONTO INFILL 600mm x 161mm WH GY			0	96551420
CONTO INFILL 600mm x 236mm WH GY			0	96551421
CONTO INFILL 900mm x 161mm WH GY			0	96551426
CONTO INFILL 900mm x 236mm WH GY			0	96551427
CONTO INFILL 1200mm x 161mm WH GY			0	96551432
CONTO INFILL 1200mm x 236mm WH GY			0	96551433
Contour Accessories				
JUP3 / CONTO D TWKIT 1200MM			0,5	96241827
JUP3 / CONTO D TWKIT 1500MM			0,5	96241828
CONTO CONNECT KIT SINGLE LAMP			0	96551440
CONTO CONNECT KIT TWIN LAMP			0,1	96551441
CONTO MSW1 x 2			0,24	96551444