

DESIGNED TO GIVE AN AUTHENTIC SHINGLE EFFECT

INTRODUCING THE **NEW** BRITMET SHINGLE



- ✓ Educational buildings
- ✓ Commercial buildings
- ✓ Flat to pitch

- ✓ Community centres
- ✓ Vertical cladding
- ✓ Holiday homes
- ✓ Park homes

- ✓ Camping pods
- ✓ Stables
- ✓ Conservatories
- ✓ Lean to's

DESIGNED TO GIVE AN AUTHENTIC SHINGLE EFFECT


ADVANTAGES

- British made
- Designed to give a traditional shingle appearance
- Lightweight
- Low pitch
- Good vandal resistance
- Quick installation
- Cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- Guaranteed for 40 years against weather penetration
- Full technical support available
- Hidden fixing

TECHNICAL DATA

- Min. pitch: 15°
- Max. pitch: 90°
- Overall width: 1326mm
- Cover width: 1231mm
- Side lap: 95mm
- Step: 20mm
- Batten gauge (0.45mm): 250mm
- Roof cover per tile panel: 0.308m²
- Tile panels per m²: 3.2 No per m²
- Steel base: 0.45mm
- Weight as laid per m²: 7.3kg
- Fire resistance: AA classification equal to traditional roof tiles and slates

COLOURS AVAILABLE

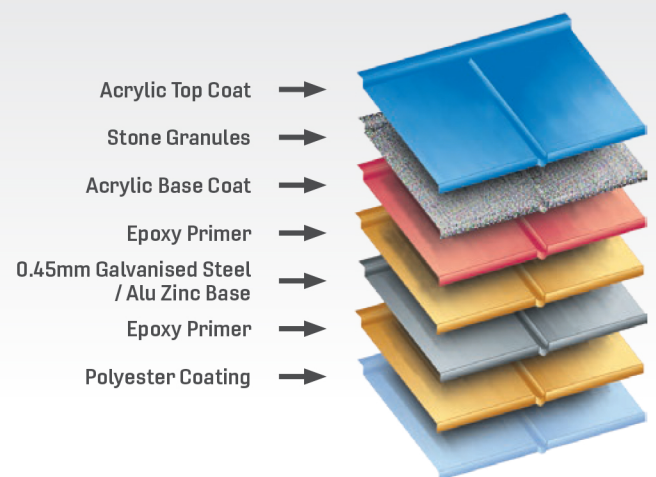

Kingfisher House, Unit 17, Overthorpe Road, Banbury OX16 4SX
T +44 (0) 1295 250998 **F** +44 (0) 1295 271068 **E** sales@britmet.co.uk

www.britmet.co.uk

APPROVALS:

- Manufactured using ISO 9001 approved materials
- ISO 14001