




COLLINGWOOD  
LIGHTING



FEATURES & BENEFITS

- › Small & discreet decorative recessed LED light
- › Perfect for discreet decorative light in interior and exterior applications

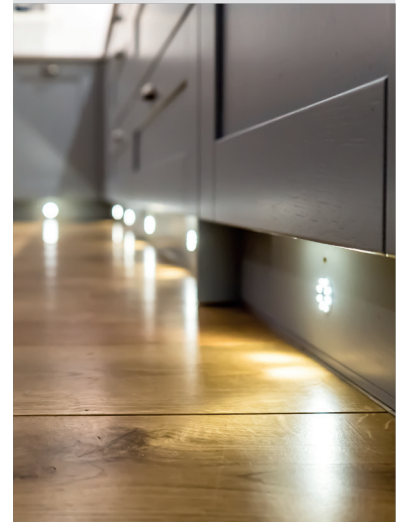

ML01

Decorative LED mini light



Submersible to 9m



7-year extended warranty available



Patent information: [collingwoodlighting.com/patent](http://collingwoodlighting.com/patent)

ZONE

L70, B10

35DCM

PHOTOMETRICS @ 25°C

Colour	Product code	CRI	lm	lm/W	lx at 1m
4000K	ML01 NW	>70Ra	4	4	0
3000K	ML01 WW	>80Ra	3.6	3	0
2700K	ML01 27*	>80Ra	3.5	3.5	0
Amber	ML01 AMBER	-	-	-	-
Blue	ML01 BLUE	-	-	-	-
Green	ML01 GREEN	-	-	-	-
Red	ML01 RED	-	-	-	-

\*Available on request, please call our team for lead times and MOQ on 01604 495 151

GENERAL

Construction material: Stainless steel (316)

WIRING

Cable / flying lead: 1m (0.205mm<sup>2</sup> red & black PTFE)

Type of wiring required: Series


LED DRIVERS

Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/350 1-9	350	Yes	No	1	1	9
PLR/350 1-5	350	Yes	No	0	1	5
PLD UNI-DRIVE 350MA	350	Yes	Yes (1-10V)	2	1	10


ACCESSORIES

Product code	Description
CR135	0.205mm <sup>2</sup> PTFE cable
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
UY2 CONNECTOR	Quick waterproof connector

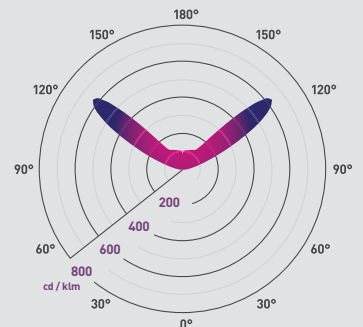

4000K

Additional diagrams available at [collingwoodlighting.com](http://collingwoodlighting.com)



This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

Energy efficiency scale: A++ (green), A+ (light green), A (yellow-green), C (yellow), D (orange), F (red). The scale is marked with 'LED' and a crossed-out 'F'.

874/2012

