versie 28/01/2013

TECHNICAL DATA SHEET

Ventilation & Sun Control

TYPE	**DUCOSLIDE LUXFRAME 80 Wood**
DESCRIPTION	Permanent external solar shading system with sliding shutters. This system contains wooden blades fixed in an aluminium frame

EXECUTION

	Manual	Motorized
Single	X	X
Double	X	X
Double in front of each other	X	
Triple in front of each other	X	
Symmetric	X	X
Double telescopic	X	X
Triple telescopic		

TYPE OF BLADE	Lux 80 Wood
TYPE OF WOOD	Western Red Cedar (quartersawn)
BLADE HEIGHT	65mm
BLADE PITCH	100mm
INCLINATION ANGLE	37°
MAX. BLADE LENGTH	2100 mm
FRAME TYPE (WxH)	40mm x 80mm
MAX. FRAME WIDTH	W : 1200 without reinforcement profile H: 3280mm /W:1800 with reinforcement profile H: 2735mm
MAX. FRAME HEIGHT	H:4095, W:500 without reinforcement profile / H:3235 W: 1200 with reinforcement profile
MAX. SLIDE WEIGHT	60 kg
FRAME MATERIAL	Aluminium : Al Mg Si 0,5
SURFACE TREATMENT	standard natural anodized (15- 20µm) Polyester powdercoated (60-80µm)
COLOURS	All RAL colours

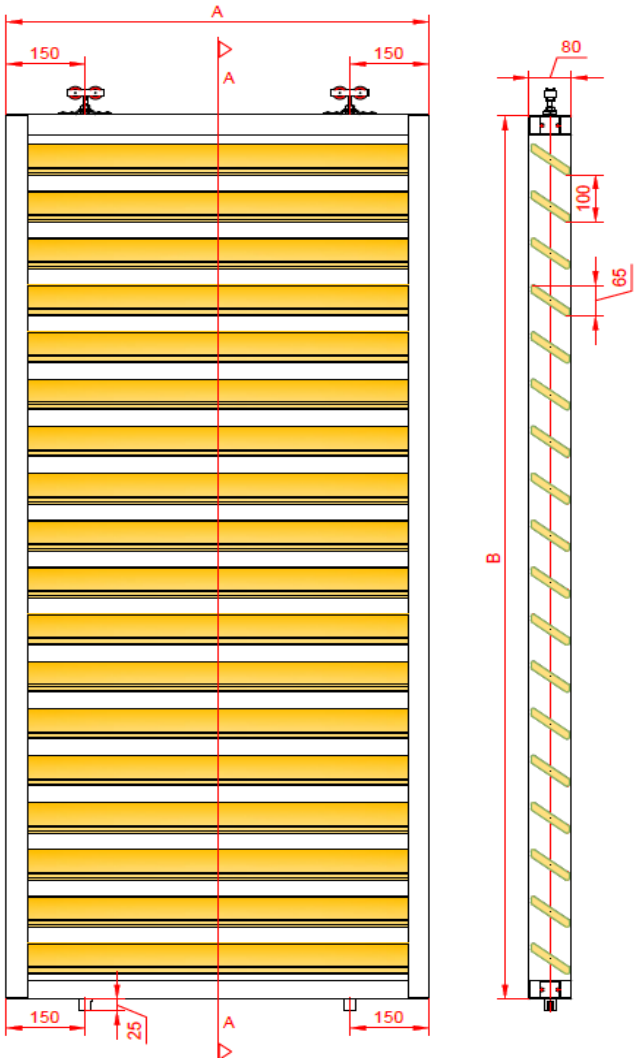

B: Frame height
A: Frame width