


TECHNICAL DATA SHEET

TYPE	DUCOSLIDE Slimframe 5-50 50Z/30°	
DESCRIPTION	External permanent solar shading system with sliding shutters and fix frame	
EXECUTIONS	Manual	Actuator
Single	X	X
Double	X	X
Double: one in front of another	X	
Triple: one in front of another	X	
Symmetric		X
Telescopic double		
Telescopic triple		
BLADE TYPE	50Z/30°	
BLADE HEIGHT	72 mm	
BLADE PITCH	115 mm	
INCLINATION ANGLE	30°	
MAX. LENGTH BLADE	1801 mm	
FRAME TYPE (WxH)	5/50	
BOTTOM GUIDE	L profile 20x20x4mm	
MAX. WIDTH SLIDE	W: 1800mm (H: 2620)	
MAX. HEIGHT SLIDE	H: 3585mm (W: 500)	
MAX. WEIGHT SLIDE	60 kg	
FIXATION TOP TRACK	each 400mm	
TOP TRACK	Top track 30/47/3 (manual system) Top track 30/60/3 (system with actuator)	
ACTUATOR	Details on request	
FRAME	Aluminium : Al Mg Si 0,5	
SURFACE TREATMENT	standard anodised (15- 20µm) polyester powdercoated (60-80µm)	
COLOURS	All RAL colours	

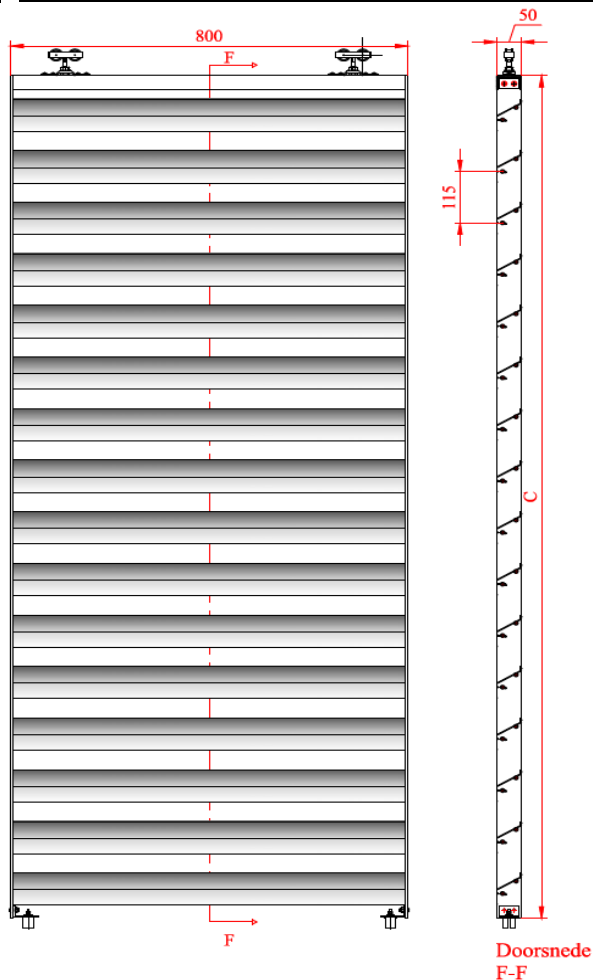

B: Frame width

C : Frame height