


TEMPUS-MINI2 - Compact 3W Recessed LED




Description

Aluminium 3W LED miniature fixture featuring recessed COB CITIZEN CLU0B0 LED light source. Construction rated to IP54 allowing for versatile application. A 3 Step MacAdams binning strategy ensures colour consistency with single chip technology providing a consistent beam. Light quality assurance with CRI > Ra 80. Fire Rated to 90 minutes.

Dimensions

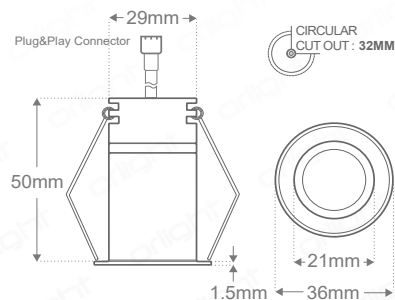

Polar Report

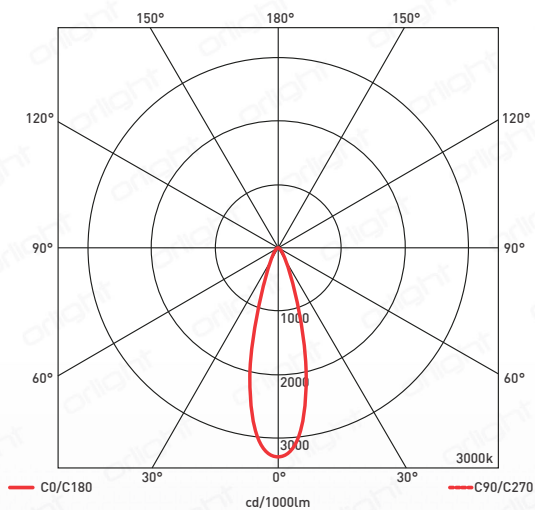

Specifications

Chipset	COB CITIZEN CLU0B0		
Dimming Options	MAINS; 1-10V; DALI		
Power Consumption	2.5W Fixture Power / 3W Circuit Power		
Current	140mA		
Voltage	18V		
Colour Temperature	2700K	3000K	4000K
Light Output ~	250lm	260lm	280lm
lm Per Watt ~	83lm/W	87lm/W	93lm/W
CRI	>80	>80	>80
Beam Angle	30°		
Binning	3 Step MacAdams Ellipse		
Chip Life TM-21	L70 > 55,000 hours		
Ambient Temperature	-20°C ~ 45°C		
Cutout	32mm		
Aperture Size	36mm		
IP Rating	IP54		
Fire Rated	90 Minutes		
Weight	40g		
Material	Aluminium		
Finish	White - Epoxy Powder Coat; Aluminium; Black RAL9005		

Colourmetrics

2700K

R1	R2	R3	R4	R5	R6	R7	R8
83	93	95	83	84	93	82	59
R9	R10	R11	R12	R13	R14	R15	
11	85	85	81	85	98	74	

3000K

R1	R2	R3	R4	R5	R6	R7	R8
84	93	96	84	85	92	84	62
R9	R10	R11	R12	R13	R14	R15	
14	84	85	77	86	99	76	

4000K

R1	R2	R3	R4	R5	R6	R7	R8
84	90	95	85	84	87	88	69
R9	R10	R11	R12	R13	R14	R15	
20	77	85	66	86	97	79	

Product Coding: Example: TEMPUS-MINI-WH-3000K-2

*Accessories

CODE	FINISH	COLOUR TEMPERATURE	DIMMING OPTION	DRIVERS
TEMPUS-MINI	WH (RAL9016)	2700K	D - (MAINS DIM)	TEMPUS-MINI-DR-DIM-2IC-2
	AL	3000K	1-10V	JOLLY-MINI-1-10-LC
	BL (RAL9005)	4000K	DALI	JOLLY-MINI-DALI-LC
			*Refer to Accessories	REMOTE DRIVERS