

EDEN 2



The EDEN is a compact spotlight series from Tryka that offers high degree of visual comfort using precisely engineered reflector and baffle. Designed with slim trim in various sizes, this new generation spot light is developed based on the feedback received from designers and architects.

EDEN2 is constructed with a slotted heatsink for efficient heat dissipation. The excellent colour rendering properties, constant colour quality throughout its service life and high energy efficacy make it a perfect solution for illuminating hotels, receptions, lobbies and similar applications requiring tight glare control. A wide range of beam angles and lumen packages are available to meet the needs of various lighting applications.



Colours Available

Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

20°, 26°, 38°

Technical Specification		
System Power Consumption	10W	12W
LED Power Consumption	8.5W	10.2W
CRI	Ra80+ Standard Ra95 Optional	
Luminaire Luminous Flux @CRI80	655lm(2700K) 680lm(3000K) 710lm(4000K) 710lm(5000K)	790lm(2700K) 820lm(3000K) 850lm(4000K) 850lm(5000K)
Driver	Remote	
Adjustability	Fixed	
Housing	Aluminium	
Trim Finish	White	
Baffle finish	Black	
Weight	0.22kg	
IP Rating	IP43	
Lamp life L70	50,000 hours	
Operating Ambient Temp.	-10°C to +40°C	

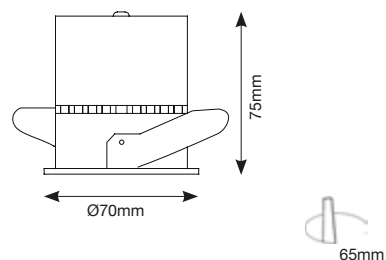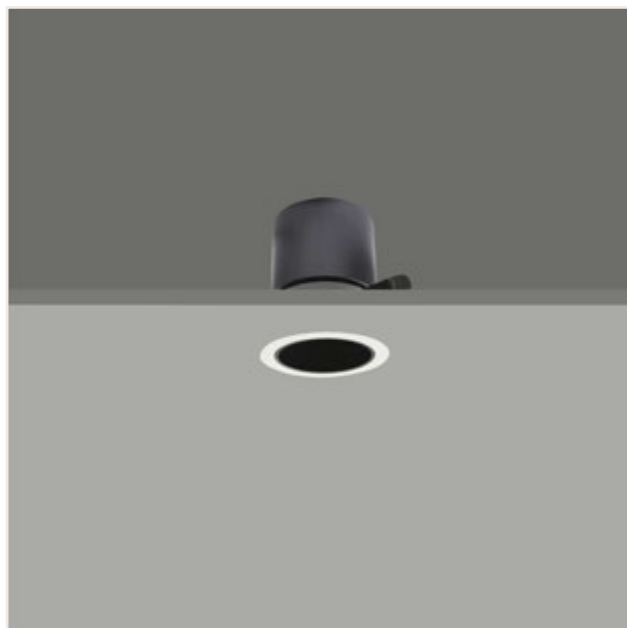

EDEN2 can be supplied with various dimming options - Triac, 1-10V, DALI and non-dimmable.

Please order drivers separately.

Product Code

TRY - EDEN2 -	10W -	27K -	20 - IP20
	12W	30K	26
		40K	38
		50K	

Note: Please choose appropriate driver from Tryka range.

Product Code Example:

TRY-EDEN2-12W-40K-38-IP20

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com