

FOCUS 15W MODULE



FOCUS 15W module includes efficient faceted lens that brings out the sparkle and is available in spot, medium or flood beam angles. The lens offers glare free lighting with very high visual comfort.

FOCUS features various colour temperatures combined with optimal colour consistency. The module is suitable for Triac, 1-10V and DALI dimming. FOCUS features different colour temperatures combined with optimal colour consistency.

The module is suitable for Triac, 1-10V and DALI dimming.

Please order drivers separately.

Colours Available


Cool White - 5000K
Neutral White - 4000K
Warm White - 2700K, 3000K

Optics Available

10°, 15°, 24°, 36°, 55°

Technical Specification	
LED Power Consumption	15W
Lumen Output @ CRI80	1350lm (2700K) 1450lm (3000K) 1550lm (4000K) 1550lm (5000K)
CRI	Ra80+ Standard Ra95 Optional
Driver	Remote 350mA
Housing	Aluminium
Trim Finish	Silver
Lens	Faceted PMMA
Module Dimensions	50mm Dia x 96mm H
IP Rating	IP43
Lamp Life L70	50,000 hours
Operating Ambient Temp.	-10°C to +40°C

NOTES:
1. Lumen output shown for 36° beam.
2. Please choose appropriate driver from Tryka range.

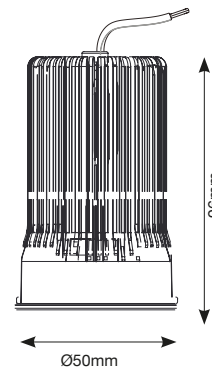

Product Code

TRY - FOCUS MR16 - 15W - 27K - CRI80 - 10
30K CRI95 15
40K 24
50K 36
55

Product Code Example:

TRY-FOCUS MR16-15W-27K-CRI95-36

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com