STRIPLINE 26

STRIPLINE System is a simple yet high performing linear light system from TRYKA providing a solution for illuminating building facades, walls, coves and windows.

STRIPLINE26 is made of extruded aluminium and stainless steel screws and is a robust linear LED light designed for both indoor and outdoor applications.

The fixture is available in lengths of 500mm and 1000mm and is equipped with an adjustable bracket. Custom lengths are available upon request.

A range of optics are available.

StripLine 26 can be dimmed using Triac, 1-10V, DALI or DMX system. Please order appropriate TRYKA drivers separately.

Colours Available

RGB	Amber
Red	Cool White - 5000K
Green	Neutral White - 4000K
Blue	Warm White - 2700K, 3000K

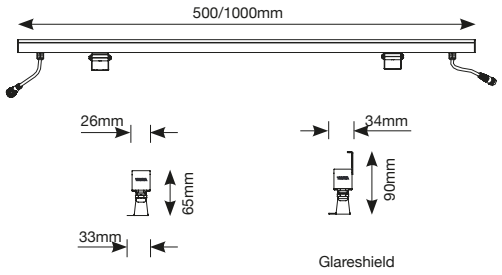

Optics Available

40°, 60°,12°x55°,120° (non-optic)

Technical Specification		
Length	500mm	1000mm
Number of LEDs	24	48
LED Power Consumption Single Colour RGB	 6W 6W	 12W 12W
Input Voltage	24V DC	
Luminaire Luminous Flux @4000K CRI80	75lm/w	
Housing Material	Aluminium	
Housing Finish	Grey Powder Coated	
Diffuser	Clear Tempered Glass	
Control	Triac, 1-10V, DALI, DMX	
Driver	Remote	
Weight	0.8kg	1.1kg
IP Rating	IP66	
Lamp life L70	50,000hours	
Operating Ambient Temp.	-20°C to +50°C	

Product Code

TRY - SL26 - 500 - XX - YYY - ZZZ - 40 - 24V - IP66
1000 60
120
12x55

Glare Sheild: TRY-SL26-GLARESHIELD-500/1000mm

Note:
Replace XX with number of LEDs
Replace YYY with wattage from the technical specification table
Replace ZZZ with 27K, 30K, 40K, 50K, RED, GRN, BLU, AMB, RGB

Product Code Example:
TRY-SL26-1000-48-12W-40K-40-24V-IP66

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

UK MANUFACTURER since 2002