STRIPLINE 41

LINEAR

STRIPLINE System is a simple yet high performing linear light system from TRYKA providing a solution for illuminating building facades, walls, coves and windows.

STRIPLINE41 is made of extruded aluminium and stainless steel screws and is a robust linear LED light designed for both indoor and outdoor usage.

The fixture is available in lengths of 500mm and 1000mm and is equipped with an adjustable bracket. Custom lengths available upon request.

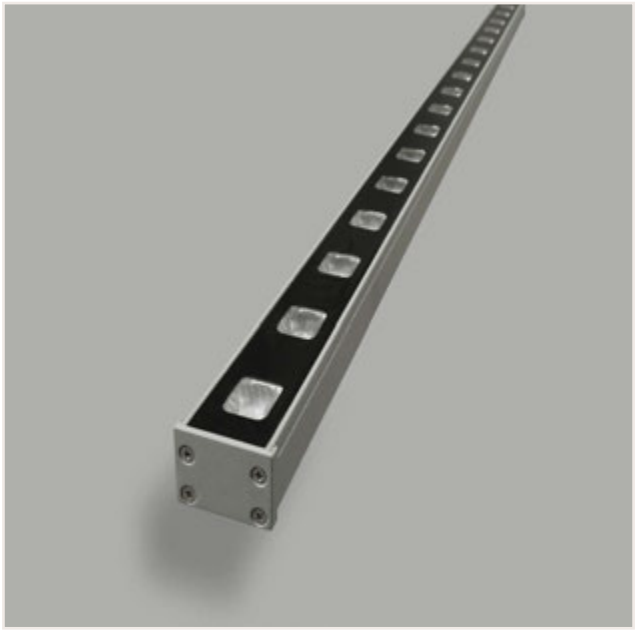

StripLine 41 can be dimmed using Triac, 1-10V, DALI or DMX system. Please order appropriate TRYKA drivers separately.

Colours Available

RGB	RGBW
Red	Cool White - 5000K
Green	Neutral White - 4000K
Blue	Warm White - 2700K, 3000K
Amber	

Optics Available

10°, 25°, 40°, 60°,12°x55°

Technical Specification				
Length	500mm		1000mm	
Number of LEDs	9	12	18	24
LED Power Consumption Single Colour RGB RGB 3 in 1 RBGW 4 in 1	 10W - 12W 15W	 13W 15W - -	 20W - 23W 30W	 26W 30W - -
Input Voltage	24V DC			
Luminaire Luminous Flux @4000K CRI80	77lm/w			
Housing Material	Aluminium			
Housing Finish	Grey Powder Coated			
Diffuser	Clear Tempered Glass			
Control	Triac, 1-10V, DALI, DMX			
Driver	Remote Integral optional for 1m			
Weight	1.1kg		1.7kg	
IP Rating	IP66			
Lamp life L70	50,000hours			
Operating Ambient Temp.	-20°C to +50°C			

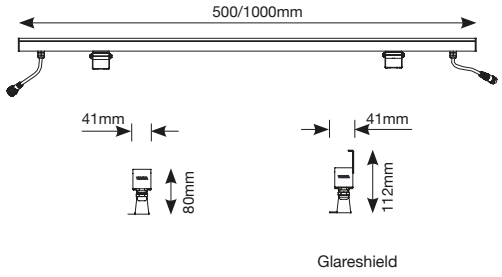

Glareshield

Product Code

TRY - SL41 - 500 - XX - YYY - ZZZ - 10 - 24V - IP66
1000 25
40
60
12x55

Glare Shield: TRY-SL41-GLARESHIELD-500/1000mm
Notes:
Replace XX with number of LEDs
Replace YYY with wattage from the technical specification table
Replace ZZZ with 27K, 30K, 40K, 50K, RED, GRN, BLU, AMB, RGB, RGBW
For RGBW please specify white colour temperature.

Product Code Example:
TRY-SL41-1000-18-20W-30K-12x55-24V-IP66

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

Tryka L.E.D. Ltd., Unit 3 Station Works, Station Road, Shepreth, Nr. Royston, Herts, U.K SG8 6PZ. Tel: +44 (0) 1763 260666 www.tryka.com

UK MANUFACTURER since 2002