

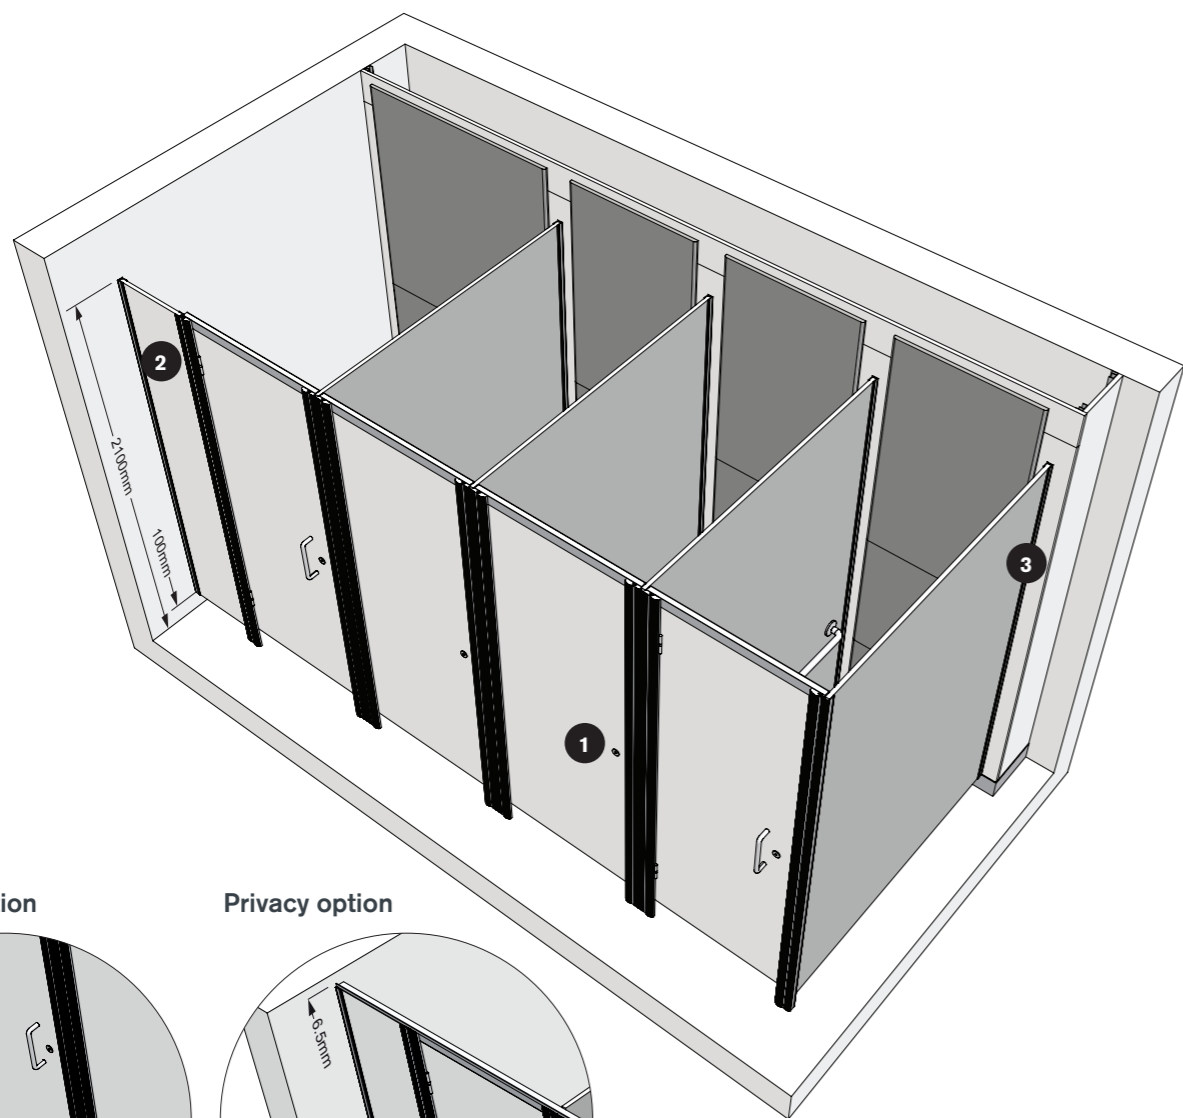


Technical Specifying Centurion

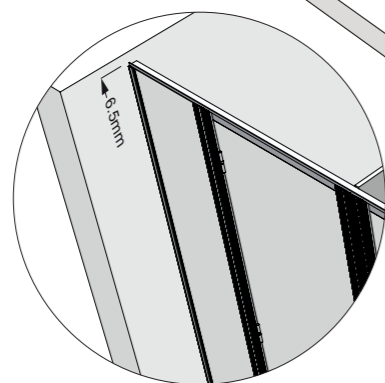

Full Height option

Privacy option

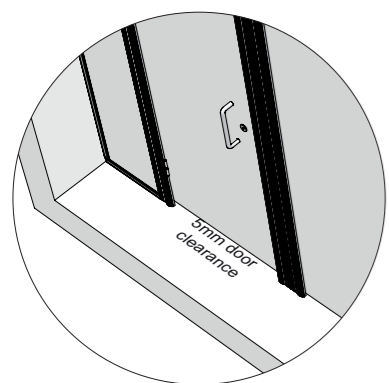

Dimensions

Centurion	
Overall height	2100mm
Maximum depth	
MFC	2092mm
HPL	2062mm
SGL	1922mm
Floor clearance	100mm
Minimum ceiling clearance	10mm
Centurion Full Height	
Maximum height	
MFC	2774mm
HPL	2774mm
SGL	2774mm
Maximum depth	
MFC	2040mm
HPL	2040mm
SGL	1922mm
Floor clearance	5mm at doors 0mm at partitions and pilasters
Minimum ceiling clearance	10mm
Centurion Privacy	
Maximum height	
MFC	2816mm
HPL	2816mm
SGL	2816mm
Maximum depth	
MFC	2040mm
HPL	2040mm
SGL	1922mm

Floor clearance	5mm at doors 0mm at partitions and pilasters
Minimum ceiling clearance	6.5mm

Performance

Available in three material options, Centurion is suitable for every type of wet or dry environment, allowing you to specify the most appropriate option to meet the site requirements and your budget.

MFC
For dry environments with low risk of vandalism. Panels are manufactured from 19mm nominal thickness high performance moisture-resistant melamine faced chipboard. Edges lipped with ABS.

HPL
For more heavily used washrooms, panels are heat, scratch and impact resistant. Manufactured from moisture-resistant chipboard faced with high pressure laminate, panels are 19mm nominal thickness. Edges lipped with ABS.

SGL
Solid grade laminate is extremely resistant to impact and all surfaces are impervious to water. Panels are 13mm nominal thickness with polished black radiused edges.

Detailing

Panels and doors
Available in MFC, HPL and SGL.

Colour finish
MFC, HPL and SGL
34 colours from the standard range.

Cubicle hardware
Satin anodised aluminium and satin anodised effect powder coated zinc.

Edge treatment
MFC and HPL
Matching ABS lipping.
SGL
Polished black radiused edge.

Headrail
High strength extruded satin anodised aluminium headrail.

Pilasters
High strength extruded fluted satin anodised aluminium pilasters which extend down to floor level and are fixed to floor using mounting blocks.

Cubicle hardware
Indicator bolt
Satin anodised aluminium slide operated bolt with circular face plate and emergency release facility. Faceplate and keep with concealed fixings.
Hinge
Standard and Full Height: Anti-finger trap satin anodised effect powder coated zinc rise and fall hinge. Outward opening hinge option available.
Privacy: Satin anodised effect powder coated zinc 5mm nominal door clearance rise and fall hinge. This is not an anti-finger trap hinge.

Fixings
Partition to wall: continuous satin anodised aluminium U-channel.

Accessories
Coat hooks and toilet roll holders available.