


Avenue TSI

Wall mounted linear whiteboard luminaire

Whitecroft
lighting

IP20

LED

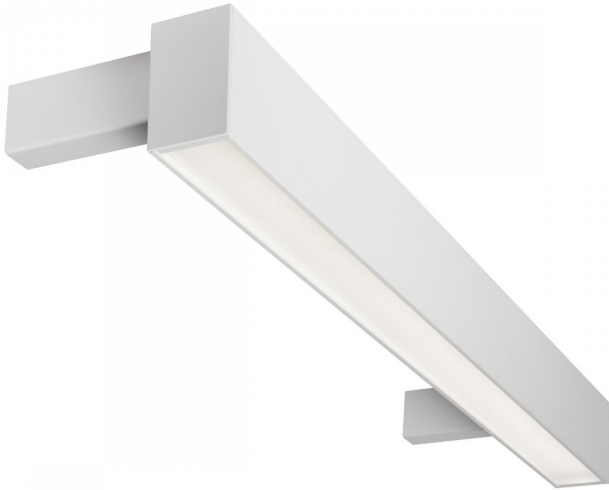

Optics

- Light Output Options:
 - 1200 lumens (15W)
- Hexaprism optic for maximum comfort and glare control and to enable compliance with LG5 for education
- 4000K 'cool' white LEDs
- 50,000 hr life
- 100% downlight for effective illumination of whiteboard

Body

- Specially designed for application above a whiteboard or similar teaching surface
- Luminaire components are purchased separately; – Body
 - Light engine
 - Diffuser
 - Wall mounting kit
- Slim extruded aluminium body finished in white or silver
- Wall mounting kit includes two fabricated steel arms and eight concealed screws to fit brackets to luminaire
- When wall mounting kit is utilised, luminaire sits 280mm off the wall
- Choice of 3hr Emergency or COMEPS emergency (can be wired as Easytest if required)
- Uplight not suitable when wall mounting product
- Assembly on site

Order codes

Light Engine

Light Engine	Fixed Output	3hr Emergency
1300 lumen (15W)	AV41HL	AV41HLEM

Body

Silver	AV4BSTSS
--------	----------

Accessories

Lay-in Hexaprism Diffuser	AV4SDMST
End caps (pair), silver	AVSECS
Wall Mounting Kit - White	AVSURFW
Wall Mounting Kit - Silver	AVSURFS

Options


COMEPS*	Add suffix /EP	i.e AV41HL/EP
DALI	Replace H with Y	i.e AV41YL

* COMECS can be wired as Easytest if required.

LED Performance


Colour Temp	RA (CRI)	Life expectancy	Colour consistency
4000K	>80	L70(50,000hrs)	MacAdam 4 SDCM

Dimensions

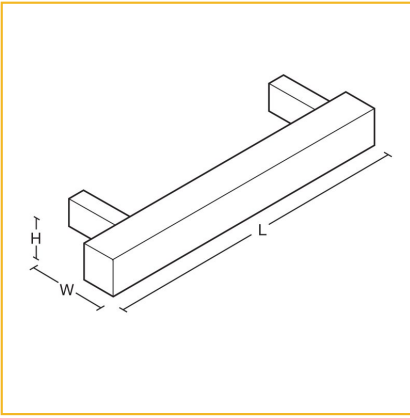

L	W	H	KG	KG(EM)
1145	280	120	6.6	8.1

Photometric Performance

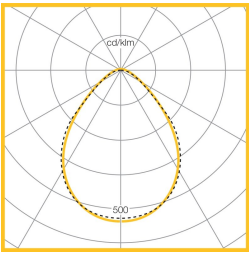

4000K 15W LED
Hexaprism Optic
LOR = 100.0%
SHR MAX = 1.47

To Specify

Wall mounted LED luminaire for whiteboard illumination with Hexaprism optic – as Whitecroft Lighting AVENUE TSI